


Data Sheet | Item Number: 222-412
Conector CLASSIC; pentru toate tipurile de conductori; max. 4 mm²; 2 conductori;
cu levier; carcasă gri; Temperatură aer ambiant: max 40°C; 2,50 mm²; gri



<https://www.wago.com/222-412>



Color: ■ gri

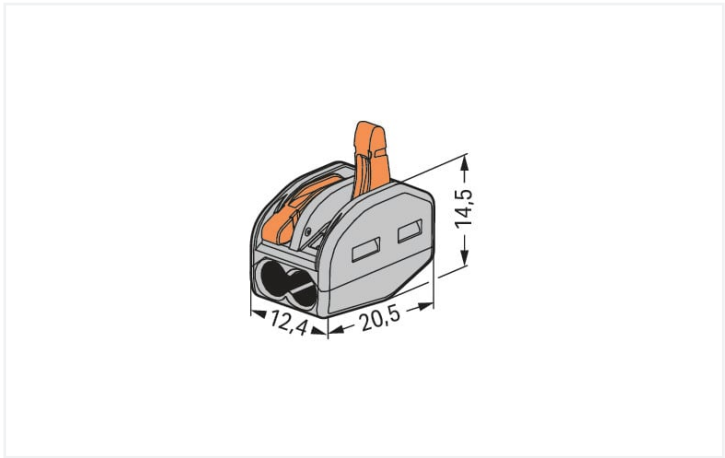

Dimensions in mm

Notes	
Safety information	in grounded power lines

Electrical data			
Ratings per		EN 60664	
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	-	400 V
Rated surge voltage	-	-	4 kV
Rated current	-	-	32 A

Connection data		Connection 1	
Connection points	2	Connection technology	CAGE CLAMP®
Total number of potentials	1	Actuation type	Lever
		Connectable conductor materials	Copper
		Solid conductor	0,08 ... 2,5 mm² / 28 ... 12 AWG
		Stranded conductor	0,08 ... 2,5 mm² / 28 ... 12 AWG
		Fine-stranded conductor	0,08 ... 4 mm² / 28 ... 12 AWG
		Strip length	9 ... 10 mm / 0.35 ... 0.39 inci
		Wiring direction	Side-entry wiring



Physical data	
Width	12,4 mm / 0.488 inci
Height	14,5 mm / 0.571 inci
Depth	20,5 mm / 0.807 inci

Material data	
Note (material data)	Information on material specifications can be found here
Color	gri
Flammability class per UL94	V0
Fire load	0.067 MJ
Actuator color	orange
Weight	3.1 g

Environmental requirements	
Ambient temperature (operation)	+40 °C
Continuous operating temperature	85 °C

Commercial data	
eCl@ss 10.0	27-14-11-04
eCl@ss 9.0	27-14-11-04
ETIM 8.0	EC000446
ETIM 7.0	EC000446
PU (SPU)	500 (50) Buc.
Packaging type	Box
Country of origin	DE
GTIN	4050821346470
Customs tariff number	85369010000

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption