


Data Sheet | Item Number: 294-5013

Lighting connector; push-button, external; without ground contact; N-PE-L; 3-pole;
Lighting side: for solid conductors; Inst. side: for all conductor types; max. 2.5 mm²;
Surrounding air temperature: max 85°C (T85); 2,50 mm²; white

<https://www.wago.com/294-5013>



Color: white

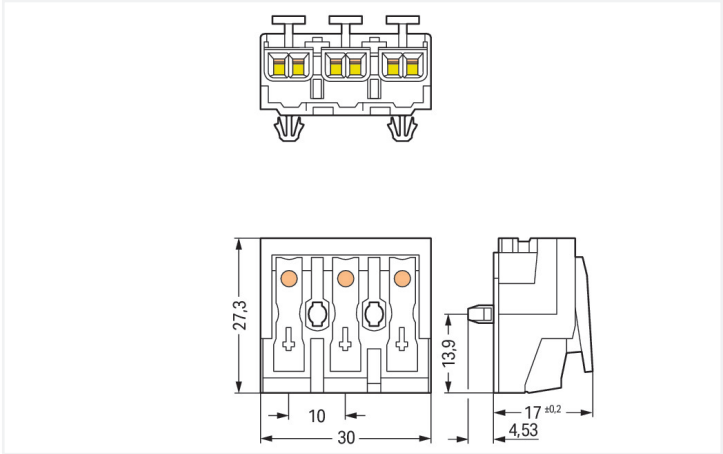

Dimensions in mm

- External connection of solid, stranded and fine-stranded conductors
- Universal conductor termination (AWG, metric)
- Third contact located at the bottom of internal connection end
- Strain relief plate can be retrofitted

Electrical data						
Ratings per		IEC/EN 60998-1			Ratings per	
		IEC/EN 60998-2-2				
Overvoltage category	III	III	II	Overvoltage category	III	III
Pollution degree	3	2	2	Pollution degree	3	2
Nominal voltage	-	-	500 V	Nominal voltage	-	-
Rated surge voltage	-	-	4 kV	Rated surge voltage	-	-
Rated current	-	-	24 A	Rated current	-	-

Connection data

Connection points	15
Total number of potentials	3
Number of connection types	4
PE function	without PE contact

Connection 1

Connection type 1	External 1
Connection technology	Push-in CAGE CLAMP®
Number of connection points	2
Actuation type	Push-button
Connectable conductor materials	Copper
Solid conductor	0.5 ... 2.5 mm ² / 18 ... 12 AWG
Solid conductor; push-in termination	0.5 ... 2.5 mm ² / 18 ... 12 AWG
Stranded conductor	0.5 ... 2.5 mm ² / 18 ... 14 AWG
Fine-stranded conductor	0.5 ... 2.5 mm ² / 18 ... 14 AWG
Fine-stranded conductor; with insulated ferrule	0.5 ... 1.5 mm ² / 18 ... 16 AWG
Fine-stranded conductor; with uninsulated ferrule	0.5 ... 1.5 mm ² / 18 ... 16 AWG
Fine-stranded conductor; with ferrule; push-in termination	0.5 mm ² / 18 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches
Pole number	3
Wiring direction	Side-entry wiring

Connection 2

Connection type 2	Internal 2
Connection technology 2	PUSH WIRE®
Number of connection points 2	1
Actuation type 2	Push-in
Solid conductor 2	0.5 ... 2.5 mm ² / 18 ... 14 AWG
Fine-stranded conductor; with insulated ferrule 2	0.5 ... 1 mm ² / 18 ... 16 AWG
Fine-stranded conductor; with uninsulated ferrule 2	0.5 ... 1.5 mm ² / 18 ... 14 AWG
Strip length 2	8 ... 9 mm / 0.31 ... 0.35 inches

Connection 3

Connection type 3	Internal 3
Connection technology 3	PUSH WIRE®
Number of connection points 3	1
Actuation type 3	Push-in
Solid conductor 3	0.5 ... 1.5 mm ² / 18 ... 16 AWG
Fine-stranded conductor; with insulated ferrule 3	0.5 ... 0.75 mm ² / 18 AWG
Fine-stranded conductor; with uninsulated ferrule 3	0.5 ... 1 mm ² / 18 AWG
Strip length 3	8 ... 9 mm / 0.31 ... 0.35 inches

Connection 4

Connection type 4	Internal 4
Connection technology 4	PUSH WIRE®
Number of connection points 4	1
Actuation type 4	Push-in
Solid conductor 4	0.5 ... 0.75 mm ² / 18 AWG
Strip length 4	8 ... 9 mm / 0.31 ... 0.35 inches

Physical data

Pin spacing	10 mm / 0.394 inches
Width	30 mm / 1.181 inches
Height	21.53 mm / 0.848 inches
Height from the surface	17 mm / 0.669 inches
Depth	27.3 mm / 1.075 inches



Mechanical data	
Marking	N- -L
Mounting type	Snap-in foot

Material data	
Note (material data)	Information on material specifications can be found here
Color	white
Material group	IIIa
Insulation material	Polycarbonate (PC)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{CU})
Contact plating	Tin
Fire load	0.183 MJ
Halogen-free	Yes
Weight	9.2 g

Environmental requirements	
Temperature stability	120 °C
T marking	T85

Commercial data	
Product Group	8 (Misc. Chassis Mount Blocks)
eCl@ss 10.0	27-14-11-06
eCl@ss 9.0	27-14-11-06
ETIM 8.0	EC001284
ETIM 7.0	EC001284
PU (SPU)	500 pcs
Packaging type	Foil
Country of origin	CH
GTIN	4050821020769
Customs tariff number	85369010000

Environmental Product Compliance	
CAS-No.	131651-65-5 144317-44-2 220133-51-7 220689-12-3 25628-08-4 29420-49-3 375-73-5 503155-89-3 507453-86-3 68259-10-9
REACH Candidate List Substance	Perfluorobutane sulfonic acid (PFBS) and its salts
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	261e4131-dfa1-4519-b046-8ba29a052b54
SCIP notification number (Belgium)	2c241a96-e9e8-4aaa-8b37-a1c69dd1eb93
SCIP notification number (Bulgaria)	9fc27bff-8e04-413e-bc77-16aac5df3365
SCIP notification number (Czech Republic)	6a076f0d-d806-4563-aa57-c95910ca78eb
SCIP notification number (Denmark)	15b035cd-24b4-4da1-a5a1-8bc1180e43ef
SCIP notification number (Finland)	c6dfa81e-6a4f-433c-b60b-384745832484



Environmental Product Compliance	
SCIP notification number (France)	f9b42a0b-ecea-4f72-b8de-a37feab979a1
SCIP notification number (Germany)	27bf33bf-13ef-4c7f-8836-a3d119bf4c37
SCIP notification number (Hungary)	8a5c5a57-b067-49ed-b7b7-91d68bb5f60d
SCIP notification number (Italy)	824ef409-e605-41fb-bc1d-8197a7a56593
SCIP notification number (Netherlands)	c056a6d6-e95d-4305-8962-bd0f4f67a7e9
SCIP notification number (Poland)	fb5c304-e75e-43fa-8d15-9a8a76838533
SCIP notification number (Romania)	8caed363-3f18-4a40-9e3f-feccad99e6b5
SCIP notification number (Sweden)	cdb67ae8-3810-474d-bb10-ff17b7bc68bc

Approvals / Certificates		
General approvals		Declarations of conformity and manufacturer's declarations
		
Approval	Standard	Certificate Name
ENEC 05 DEKRA Certification B.V.	EN 60998	2128791.01
		EU-Declaration of Confor- mity WAGO GmbH & Co. KG
		UK-Declaration of Confor- mity WAGO GmbH & Co. KG

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 294-5013	

Documentation			
Additional Information		Bid Text	
Technical Section	pdf 2240.62 KB	294-5013	19.02.2019 xml 5.58 KB
		294-5013	13.06.2017 doc 27.00 KB

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 294-5013	WSCAD Universe 294-5013
	ZUKEN Portal 294-5013

1 Compatible Products

1.1 Optional Accessories

1.1.1 Strain relief

1.1.1.1 Strain relief



Item No.: 294-370
Strain relief; for 294 Series; with snap-in mounting feet; white



Item No.: 294-375
Strain relief; for 294 Series; without snap-in mounting feet; white

1.1.1.2 Strain relief plate



Item No.: 294-364
Strain relief plate; for 294 Series; for multi-core cables; 3- to 5-pole; with secured clamp; white



Item No.: 294-384
Strain relief plate; for 294 Series; for single strands; 3- to 5-pole; with secured clamp; white

1.1.2 Tool


1.1.2.2 Operating tool




Item No.: 206-294
Disconnection tool; green

Installation Notes


Installation



3-pole – without ground contact




Snap-in foot




Drilled hole for snap-in mounting foot

Conductor termination




EUROPE
1 x 0.5 ... 2.5 mm ² "s"
1 x 0.5 ... 1.5 mm ² "s"
1 x 0.5 ... 0.75 mm ² "s"
AMERICA
1 x AWG 18 ... 14 "s"
1 x AWG 18 ... 16 "s"
1 x AWG 18 "s"
JAPAN
1 x 0.8 ... 1.6 mm diam. "s"
1 x 0.8 ... 1 mm diam. "s"
1 x 0.8 mm diam. "s"

EUROPE
2 x 0.5 ... 2.5 mm ² "s, str, f-str"
AMERICA
2 x AWG 18 ... 12 "s"
2 x AWG 18 ... 14 "s, f-str"
JAPAN
2 x 0.8 ... 2 mm diam. "s"
2 x 0.5 ... 2 mm ² "str, f-str"



Internal connection:
PUSH WIRE® for internal wiring with solid conductors

External connection:
Push-in CAGE CLAMP® for field-wiring with all conductor types



Terminating five conductors per pole – solid and fine-stranded.

