MODULAR
LIGHTING —
INSTRUMENTS

Introduction

4 — 7 *Connected - A new era of Modular lighting*
8 — 9 *Need more intimacy?*
10 — 11 *The catalogue in a nutshell*

Ceiling

13 — 384

Wall

385 — 456

Exterior

457 — 528

Profiles

529 — 616

Goodies

618 — 634 *Driver matrix & back up units*
635 — 637 *Wiring diagrams*
638 — 639 *Connected - product specifications*
640 — 645 *Installation*
646 — 659 *Install tips*
660 — 661 *Index by product name*
662 — 668 *Index by article number*

LIGHT IS SENSITIVE.
IT'S AS INVITING AS IT IS FICKLE.

IT ILLUMINATES AND BLINDS
AT THE SAME TIME.

THOSE WHO ARE SENSITIVE TO LIGHT,
KNOW ITS POWER.

LET YOURSELF BE INSPIRED BY
THOSE THAT SENSE LIGHT BEFORE
THEY HAVE EVEN SEEN IT.

‘Providing the right light, in the right amount, at the right place’ is Modular’s mission statement. Living up to that mission will be easier now that Modular architectural lighting solutions are embracing the power of connected lighting.

‘We are proud, excited even, as Modular is the very first architectural lighting company worldwide to bring the power of connected lighting to high-end residential and small office, hospitality and retail environments.’

Bart Maeyens, CEO, Modular Lighting Instruments

A NEW ERA OF MODULAR LIGHTING

Today’s consumers want to control their lifestyles and Modular wants to cater to that need. So we decided to extend our luminaires with connected lighting: lighting that includes a new dimension of intelligence - connectivity. In this way, we will allow our customers to interact with our lighting solutions, thus creating peace of mind and enhancing their wellbeing. More than that, connected lighting opens the door to smart automation: you will have access to both lighting and automation from one, single touchpoint.

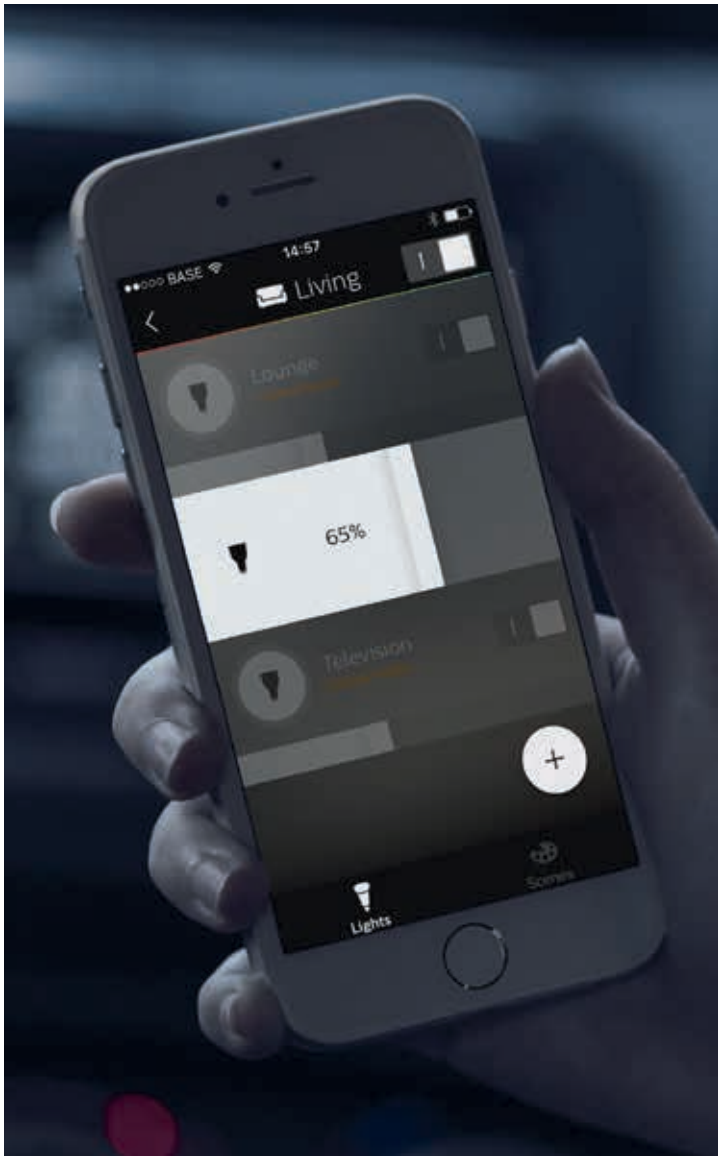

WHAT IS CONNECTED LIGHTING?

Connected lighting is a whole new way of controlling and experiencing light. It allows users to easily switch their lights on and off with just one tap or swipe, even remotely, or to activate light routines. It lets them create a particular atmosphere to fit their mood, the occasion or the task at hand. More than that, it opens the door to smart home automation, combining lighting with thermostats, blinds, sound systems and much, much more.

HOW WILL MODULAR ENABLE CONNECTED LIGHTING?

In a first step, 70% of all Modular lighting fixtures (65 product families) can now be equipped or retrofit with Philips Hue technology, enabling smart architectural lighting in new and renovation projects.
Check for the 'Friends of Hue' logo in this catalogue.

Friends of hue
personal wireless lighting

MODULAR CONNECTED LIGHTING: THE BUILDING BLOCKS

Getting started ...

At the heart of Modular's connected luminaires are the **Modular connected 1-10V white component** (1) or the **Philips Hue bulbs** (2) and **bridge** (3) – plus a **Wi-Fi network** (4). The Philips Hue bridge enables users to control all the Philips Hue products via the **Philips Hue app** (5). So whether you install **Modular luminaires** (6) that integrate the Modular connected 1-10V white component, retrofit existing (Modular) luminaires with Philips Hue bulbs or even add Philips Hue lightstrips, you'll connect and control them all with a single swipe or touch!

... or use optional controls

Do you prefer a 'physical switch'? Use the **Philips Hue tap switch** (piezo-based) (7) or the battery-powered **dimmer switch** (8) as a remote control to dim or turn on/off the lights. The tap switch even allows you to select preconfigured scenes. Want to take it a step further still? Connect the **Philips Hue motion sensor** (9) to the bridge via the app and install it in a room. The wireless, battery-powered device will automatically turn on your lights – according to the lighting scenario or setting you choose – when it detects motion and off again when you leave.

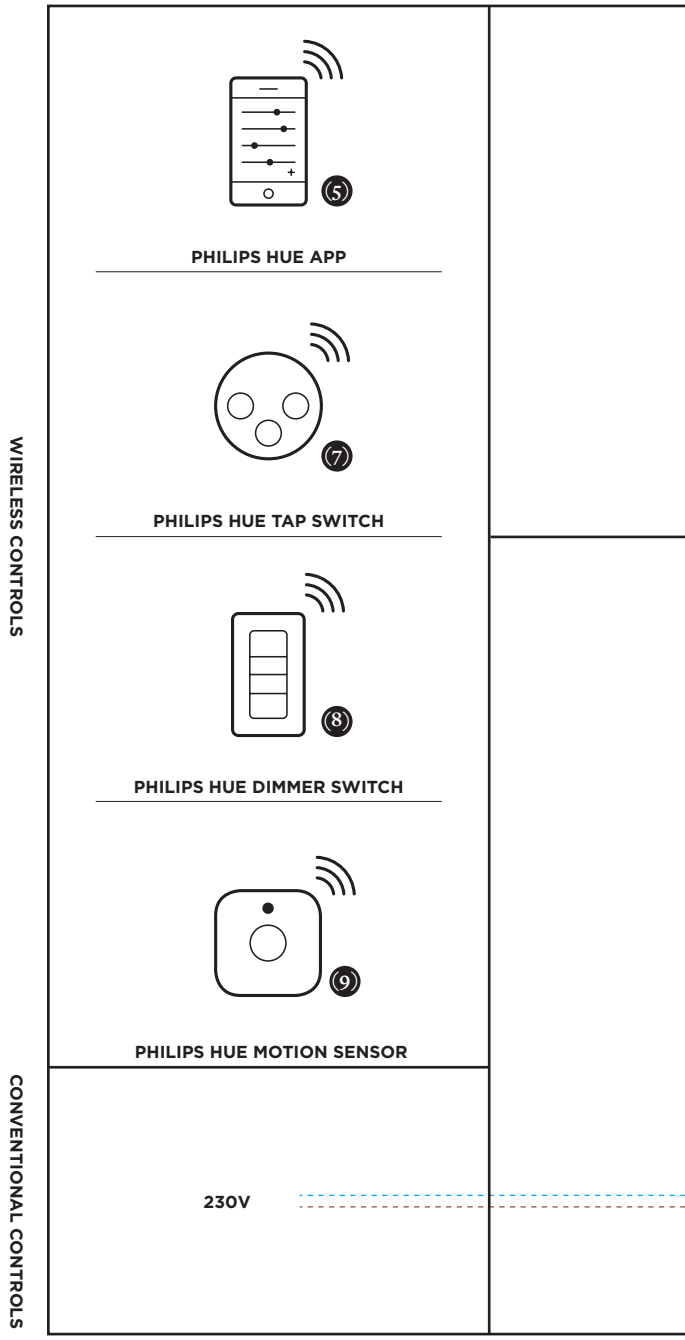

For more info, please go to **www.supermodular.com/modular-connected** and tap into the power of connected lighting.

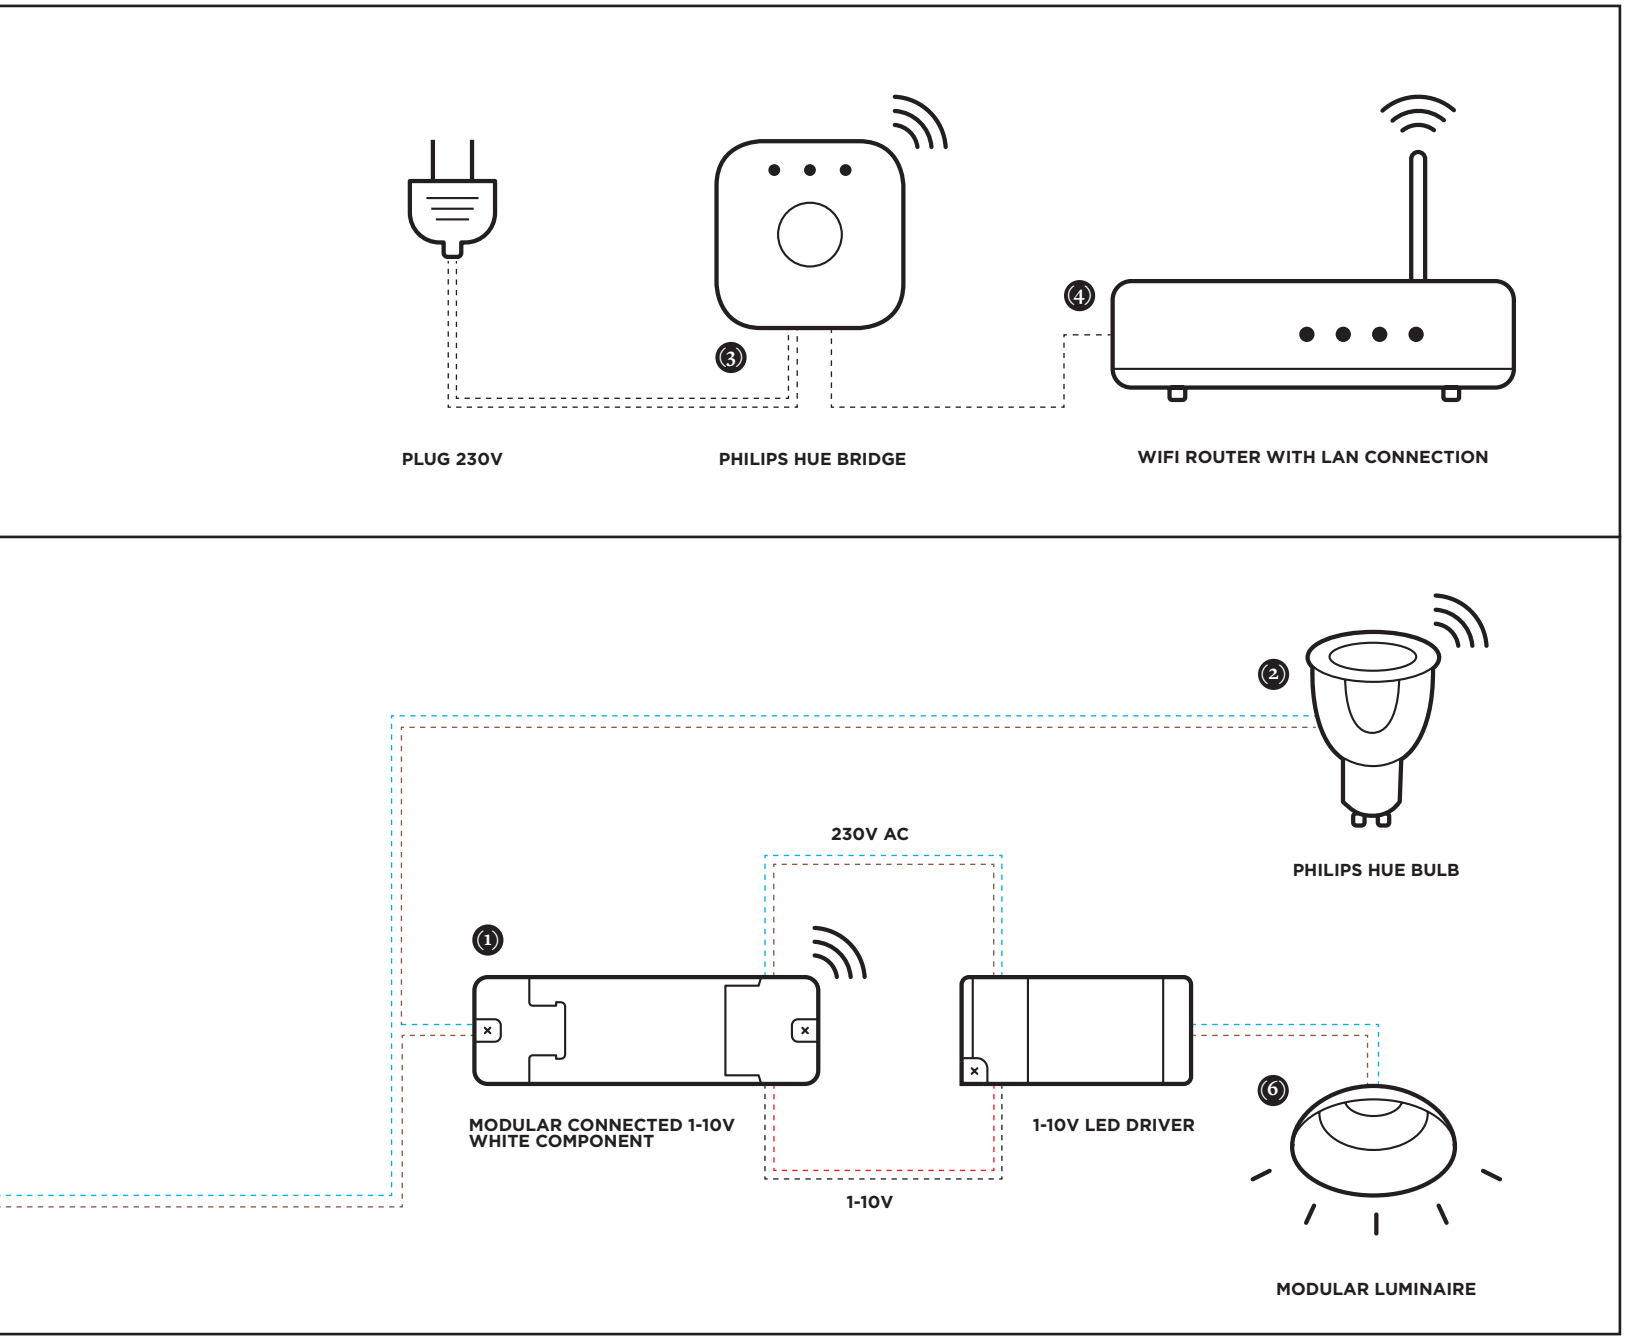

Control up to 500 Modular luminaires

You can combine and control up to 50 Philips Hue components. And as the Modular connected 1-10v white component allows you to group your lighting fixtures (1-10V drivers), you can empower up to 500 different Modular luminaires with smart lighting.

NEED MORE INTIMACY?

Enjoy our warm dim cosiness

Yeah, baby, yeah. There are times when you want to create a sultry mood. Letting a space become a more intimate, giving it that magical soft glow and a warmer feeling. This is why Modular Lighting Instruments is introducing warm dimming for several fixtures.

This warm dim technology enables LEDs to be dimmed in order to create the same warm ambiance as that of a dimmed halogen lamp. With matching high CRI values over dimming, a full range of beam angles & LED gears, impeccable dimming results without hiccups. Of course, the integration in beautiful, architectural fixtures, this new addition broadens the horizon of Modular's favourite and design emblematic fixtures.

Good to know: as this technology is integrated into a module developed by our very own in-house designers, our 'warm dim' solution* is much more efficient - even at system level - than any other available on the market today.

WARM DIM 3000K @100%

WARM DIM 2500 @50%

WARM DIM 2000K @20%

* available for:
Smart cake 82 & 115 adjustable
Smart kup 82 & 115 adjustable
Smart lotis 82 & 115 adjustable
M-LED 50 module
M-LED 70 module

THE CATALOGUE IN A NUTSHELL ...

Marcel

Marcel meets every customer's requirements for a highly efficient retail lighting solution. Its ease-of-installation, adjustability and the endless possibilities procured by different LED sources and different lamp versions (one, two or three lamps) make Marcel an extremely versatile fixture.

FOCUS ON THE ESSENTIALS

Marcel presents a stylish frame, fitted with adjustable lamp units. In the single lamp version, the frame is square shaped, while the two and three lamp versions have a rectangular shape. The refined, directional downlight will be used mainly in retail applications, as a functional lighting solution. It's perfect for situations that require both high efficiency and low consumption.

PLUG-AND-PLAY INSTALLATION

The installation of Marcel, is just as quick and easy as changing its lighting effect (by interchangeable reflectors or add-on antiglare, spreadlens, ...), thanks to our smart installation system. By simply tightening two screws, the installation flanges fold out and secure the fixture to the ceiling.

ONLY ONE LIGHT PUSH

The right lighting mood is of the utmost importance in a shop. Marcel makes it easy to change the lighting effect to suit the circumstances and setting in your retail space. The brackets and unique tilt mechanism allow you to direct the light source the way you want, and you won't need a ladder: the tip of a broomstick will do the trick! Just touch the border of the lamp's housing and redirect the lamp as desired in one single action.

SUPERMODULAR.COM/EN/MARCEL

ECO LED GE

Marcel 1x LED GE



1X LED ARRAY INCL. 11W

! 3500K AND 4000K ON REQUEST

	2700K / CRI90+			3000K / CRI90+		
	15°	25°	40°	15°	25°	40°
black struc	14091032	14091132	14091232	14091332	14091432	14091532
white struc	14091009	14091109	14091209	14091309	14091409	14091509

1

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc - values per lamp module)

	350mA	500mA	700mA
2700K / 25°	1340lm 11.7W	1800lm 17.2W	**2381lm 25W**
3000K / 25°	1388lm 11.7W	1869lm 17.2W	**2466lm 25W**

3

DRIVER	SEE DRIVER MATRIX
CONNECTED	***WHEN CONNECTED TO 1-10V DRIVER**
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR
OPTICAL	
10212700	TRANSPARANT GLASS Ø79
10212703	SPREADLENS Ø79
10212702	HONEYCOMB Ø79
11949730	REFLECTOR LED Ø80 FLOOD
11949830	REFLECTOR LED Ø80 MEDIUM
11949930	REFLECTOR LED Ø80 SPOT

4

ECO LED GE

Marcel 2x LED GE



2X LED ARRAY INCL. 11W

! 3500K AND 4000K ON REQUEST

	2700K / CRI90+			3000K / CRI90+		
	15°	25°	40°	15°	25°	40°
black struc	14092032	14092132	14092232	14092332	14092432	14092532
white struc	14092009	14092109	14092209	14092309	14092409	14092509

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc - values per lamp module)

	350mA	500mA	700mA
2700K / 25°	1340lm 11.7W	1800lm 17.2W	**2381lm 25W**
3000K / 25°	1388lm 11.7W	1869lm 17.2W	**2466lm 25W**

DRIVER	SEE DRIVER MATRIX
CONNECTED	***WHEN CONNECTED TO 1-10V DRIVER**
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR
OPTICAL	
10212700	TRANSPARANT GLASS Ø79
10212703	SPREADLENS Ø79
10212702	HONEYCOMB Ø79
11949730	REFLECTOR LED Ø80 FLOOD
11949830	REFLECTOR LED Ø80 MEDIUM
11949930	REFLECTOR LED Ø80 SPOT

Easy and comfortable

For this new catalogue, we started by looking at the customer feedback we received the past few months. Based on your observations and remarks, we were able to optimise a few important aspects to ease the use of this reference work.

First of all, we improved your reading comfort by using a larger font in our product tables (1).
To ease the retrieval of product information, we have restyled the overview pages (2) at the beginning of each chapter.
The chapters are now more recognizable and the use of fold-outs with quick indexes facilitates your search for a specific product.

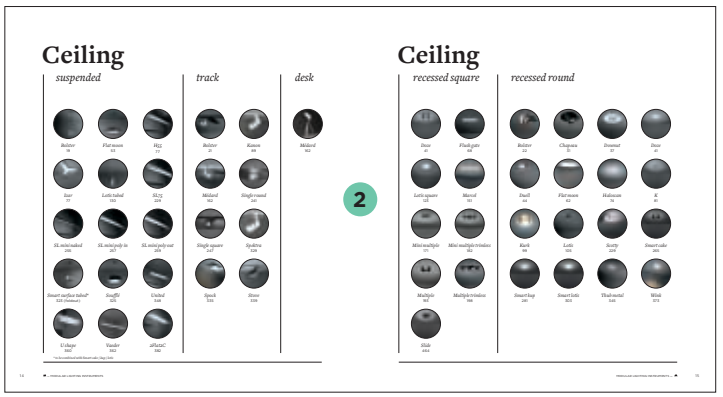

Product specifications

We've also added the 'luminaire output and power consumption' (3) information for LED products.
Because lumen values are subject to change, due to the ever-developing technologies, we recommend to also check our website for the latest information.
The 'accessories area' (4) provides you with all necessary information about accessories that are applicable to the product at hand, or refers you to a dedicated page. This concerns installation-, electrical-, optical accessories, but also M-LED modules, connected building blocks, Smart combinations, ...

Ceiling

18 *Bolster*
30 *Chapeau*
36 *Downut*
40 *Doze*
42 *Duell*
52 *Flat moon*
68 *Flush gate*
72 *H55*
74 *Haloscan*
76 *Izar*
80 *K*
88 *Kanon*
96 *Kurk*
104 *Lotis / Asy lotis*
122 *Lotis square*
128 *Lotis tubed*
138 *M-LED*
142 *Marbul*
150 *Marcel*
160 *Médard*
170 *Multiple / Mini multiple*
208 *Nomad*
216 *Nomad minimal*
218 *Rektor*
228 *Scotty*
232 *Semih*
240 *Single round*
246 *Single square*
252 *SL75*
254 *SL mini naked*
256 *SL mini poly in*
258 *SL mini poly out*
260 *Slide*
264 *Smart cake*
280 *Smart kup*
302 *Smart lotis*
322 *Soufflé*
328 *Spektra*
334 *Spock*
338 *Stove*
344 *Thub metal*
348 *United*
356 *United asy*
360 *U shape*
362 *Vaeder*
372 *Wink*
382 *2Flat2C*

Ceiling

surface



Bolster
20

Duell
43

Flat moon
53

Izar
77

Kurk
97

Lotis tubed
129

Marbul
143

Médard
161

Nomad
209

Nomad minimal
217

Rektor
219

Semih
233



SL75
253



SL mini naked
255



SL mini poly in
257



SL mini poly out
259

*Smart surface box**
323 (foldout)

*Smart surface tubed**
323 (foldout)

Spock
335

Stove
339

United
349

United asy
357

U shape
361



Vaeder
363

** to be combined with Smart cake / kup / lotis*

Ceiling

suspended

Bolster
19

Flat moon
53

H55
77

Izar
77

Lotis tubed
130



SL75
229



SL mini naked
255



SL mini poly in
257



SL mini poly out
259

*Smart surface tubed**
323 (foldout)

Soufflé
325

United
348

U shape
360

Vaeder
362

2Flat2C
382

track

Bolster
21

Kanon
89

Médard
162

Single round
241

Single square
247

Spektra
329



Spock
335

Stove
339

desk

Médard
162

** to be combined with Smart cake / kup / lotis*

Ceiling

recessed square

Doze
41

Flush gate
68

Lotis square
123

Marcel
151

Mini multiple
171

Mini multiple trimless
182



Multiple
193

Multiple trimless
198

Slide
464

recessed round

Bolster
22

Chapeau
31

Downut
37



Doze
41



Duell
44

Flat moon
62



Haloscan
74

K
81

Kurk
99

Lotis
105

Scotty
229

Smart cake
265

Smart kup
281

Smart lotis
303



Thub metal
345

Wink
373

Bolster

Think roller skates and rock 'n roll. Bolster always brings a touch of the sixties to a room. Choose the fully chromed versions with mirror effect or tone things down with the matt black or white versions, also edged in chrome. Available as a foot, recessed, track and pendant variant. Highly adjustable (offering 359° rotation and 90° inclination), Bolster will create a festive atmosphere in the entire room.

SUPERMODULAR.COM/EN/EN/BOLSTER

ECO LED

Bolster suspension LED retrofit



1X LED GU10 INCL. 5.4W

230V | R,L | IP20 | GWT 960° | 0.95KG

	2700K / CRI90
	25°
black struc	**11051832**
chrome	**11051807**
white struc	**11051809**

HALOGEN 230V

Bolster suspension GU10



1X QPAR 16 | GU10 | 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.70KG

black struc	**11050832**
chrome	**11050807**
white struc	**11050809**

CONNECTED	
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

Bolster

ECO LED

Bolster foot for LED GU10 AR111

230V | IP20 | GWT 960° | 0.90KG



black struc	11052132
chrome	11052107
white struc	11052109

1X LED AR111 EXCL. | GU10 | 15W

HALOGEN 12V GI

Bolster foot AR111 GI

230V | R,L,C | IP20 | GWT 960° | 1.00KG



UNIVERSALLY DIMMABLE	
black struc	11050332
chrome	11050307
white struc	11050309

1X QR-LP 111 | G53 | MAX. 35W

HALOGEN 230V

Bolster foot GU10

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.50KG





black struc	11051632
chrome	11051607
white struc	11051609

1X QPAR 16 | GU10 | 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED	
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

ECO LED

Bolster track for LED GU10 AR111

230V | IP20 | GWT 650° | 1.00KG



black struc	11052032
chrome	11052007
white struc	11052009

TRACK SEE BELOW

1X LED AR111 EXCL. | GU10 | 15W

HALOGEN 12V GI

Bolster track AR111 GI

230V | R,L,C | IP20 | GWT 650° | 1.10KG



UNIVERSALLY DIMMABLE	
black struc	11050232
chrome	11050207
white struc	11050209

TRACK SEE BELOW

1X QR-LP 111 | G53 | MAX. 35W

HALOGEN 230V

Bolster track GU10

Friends of hue | 230V | *R | IP20 | GWT 650° | 0.70KG



black struc	11051532
chrome	11051507
white struc	11051509

TRACK SEE BELOW

1X QPAR 16 | GU10 | 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED	
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

TRACK — FOR ADDITIONAL TRACK COMPONENTS SEE GOODIES

11240101	TRACK PROFILE SURFACE 2M SHINY WHITE	11240601	TRACK POWER FEED SURFACE LEFT SHINY WHITE	11241701	TRACK POWER FEED RECESSED LEFT SHINY WHITE
11240102	TRACK PROFILE SURFACE 2M BLACK	11240602	TRACK POWER FEED SURFACE LEFT BLACK	11241702	TRACK POWER FEED RECESSED LEFT BLACK
11240105	TRACK PROFILE SURFACE 2M ALU	11240605	TRACK POWER FEED SURFACE LEFT ALU	11241705	TRACK POWER FEED RECESSED LEFT ALU
11240301	TRACK PROFILE RECESSED 2M SHINY WHITE	11241401	TRACK COVER ENDPLATE SHINY WHITE	11242201	TRACK PROFILE SURFACE 1M SHINY WHITE
11240302	TRACK PROFILE RECESSED 2M BLACK	11241402	TRACK COVER ENDPLATE BLACK	11242202	TRACK PROFILE SURFACE 1M BLACK
11240305	TRACK PROFILE RECESSED 2M ALU	11241405	TRACK COVER ENDPLATE ALU	11242205	TRACK PROFILE SURFACE 1M ALU
11240501	TRACK POWER FEED SURFACE RIGHT SHINY WHITE	11241601	TRACK POWER FEED RECESSED RIGHT SHINY WHITE	11242401	TRACK PROFILE RECESSED 1M SHINY WHITE
11240502	TRACK POWER FEED SURFACE RIGHT BLACK	11241602	TRACK POWER FEED RECESSED RIGHT BLACK	11242402	TRACK PROFILE RECESSED 1M BLACK
11240505	TRACK POWER FEED SURFACE RIGHT ALU	11241605	TRACK POWER FEED RECESSED RIGHT ALU	11242405	TRACK PROFILE RECESSED 1M ALU

Bolster

ECO LED

Bolster recessed 155 for LED GU10 AR111

230V | IP20 | GWT 960° | 0.80KG





black struc	11052232
chrome	11052207
white struc	11052209

1X LED AR111 EXCL. | GU10 | 15W

HALOGEN 12V GE

Bolster recessed 155 AR111 GE

12V | IP20 | GWT 960° | 0.90KG





black struc	11050432
chrome	11050407
white struc	11050409

M-LED	SEE BELOW

1X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111

HALOGEN 230V

Bolster recessed 155 GU10

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.90KG





black struc	11051732
chrome	11051707
white struc	11051709

CONNECTED	
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

1X QPAR 16 | GU10 | 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

M-LED					
11298002	M-LED 111 2700K 15° GE BLACK MATT	11298302	M-LED 111 3000K 15° GE BLACK MATT	11298602	M-LED 111 4000K 15° GE BLACK MATT
11298009	M-LED 111 2700K 15° GE WHITE STRUC	11298309	M-LED 111 3000K 15° GE WHITE STRUC	11298609	M-LED 111 4000K 15° GE WHITE STRUC
11298024	M-LED 111 2700K 15° GE BRUSHED ALU	11298324	M-LED 111 3000K 15° GE BRUSHED ALU	11298624	M-LED 111 4000K 15° GE BRUSHED ALU
11298102	M-LED 111 2700K 25° GE BLACK MATT	11298402	M-LED 111 3000K 25° GE BLACK MATT	11298702	M-LED 111 4000K 25° GE BLACK MATT
11298109	M-LED 111 2700K 25° GE WHITE STRUC	11298409	M-LED 111 3000K 25° GE WHITE STRUC	11298709	M-LED 111 4000K 25° GE WHITE STRUC
11298124	M-LED 111 2700K 25° GE BRUSHED ALU	11298424	M-LED 111 3000K 25° GE BRUSHED ALU	11298724	M-LED 111 4000K 25° GE BRUSHED ALU
11298202	M-LED 111 2700K 40° GE BLACK MATT	11298502	M-LED 111 3000K 40° GE BLACK MATT	11298802	M-LED 111 4000K 40° GE BLACK MATT
11298209	M-LED 111 2700K 40° GE WHITE STRUC	11298509	M-LED 111 3000K 40° GE WHITE STRUC	11298809	M-LED 111 4000K 40° GE WHITE STRUC
11298224	M-LED 111 2700K 40° GE BRUSHED ALU	11298524	M-LED 111 3000K 40° GE BRUSHED ALU	11298824	M-LED 111 4000K 40° GE BRUSHED ALU

BOLSTER
PRIVATE RESIDENCE, RANDERS CITY (DK)

Bolster

BOLSTER
PRIVATE RESIDENCE, LES SABLES D'OLONNE
STUDIO RÉGIS DALLIER

BOLSTER
EU-TOP, AMSTERDAM (NL)
EDWARD VAN VLIET

Bolster

BOLSTER
BIT, EDE (NL)
QUUB INTERIOR CONCEPTS

BOLSTER
QLUBHOUSE, TILBURG (NL)
ZOUT ONTWERPHUIS, JEFF VAN RIEL

Bolster

BOLSTER
MANUFACTUUR, MERELBEKE (NL)
GROUP O ARCHICTECTEN

BOLSTER
HAVN, ANTWERPEN (BE)
.MAX INTERIEURARCHITECTEN

Chapeau

We should take our hats off to this fitting. Chapeau looks like Robin Hood's hat on the inside, hence the name. Chapeau's big innovation lies in the tilting system. When fully folded up in its shell, Chapeau is a downlighter, and you can see a glimpse of the rim of its bulb holder. However, the bulb holder can also be tilted to produce a clever wash effect on the walls. Available for fully recessed mounting or for recessed mounting with a rim, which creates a beautiful contrast on the ceiling. Crowned by a Good Design Award in 2012.

design in cooperation with couvreur-devos

SUPERMODULAR.COM/EN/EN/CHAPEAU

ECO LED GE

Chapeau 206 LED GE

Friends of hue | III | 500mA | IP20 | GWT 960° | 1.90KG | ▲



	2700K / CRI90+
	25°
black struc	**11900132**
white struc	**11900109**

1X LED ARRAY INCL. 16.2W

! 4000K ON REQUEST

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	**500mA**
2700K / 25°	940lm 11W	**1290lm 16.2W**

DRIVER	SEE DRIVER MATRIX
CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR
OPTICAL	
11949730	REFLECTOR LED Ø80 FLOOD
11949930	REFLECTOR LED Ø80 SPOT

ECO LED GE

Chapeau trimless 222 LED GE

Friends of hue | III | 500mA | IP20 | GWT 960° | 2.10KG | ▲



	2700K / CRI90+
	25°
black struc	**11970132**
white struc	**11970109**

1X LED ARRAY INCL. 16.2W

! RECESSED RING INCLUDED
! 4000K ON REQUEST

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	**500mA**
2700K / 25°	940lm 11W	**1290lm 16.2W**

DRIVER	SEE DRIVER MATRIX
CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR
OPTICAL	
11949730	REFLECTOR LED Ø80 FLOOD
11949930	REFLECTOR LED Ø80 SPOT

Chapeau

CHAPEAU
SPINDRIFT RACING, SAINT-PHILIBERT (FR)
STUDIO 02

CHAPEAU
HAVN, ANTWERPEN (BE)
.MAX INTERIEURARCHITECTEN

Chapeau

CHAPEAU
PRIVATE RESIDENCE, AMSTERDAM (NL)
HEYLIGERS DESIGN + PROJECT

CHAPEAU
MOBILIA, AMSTERDAM (NL)

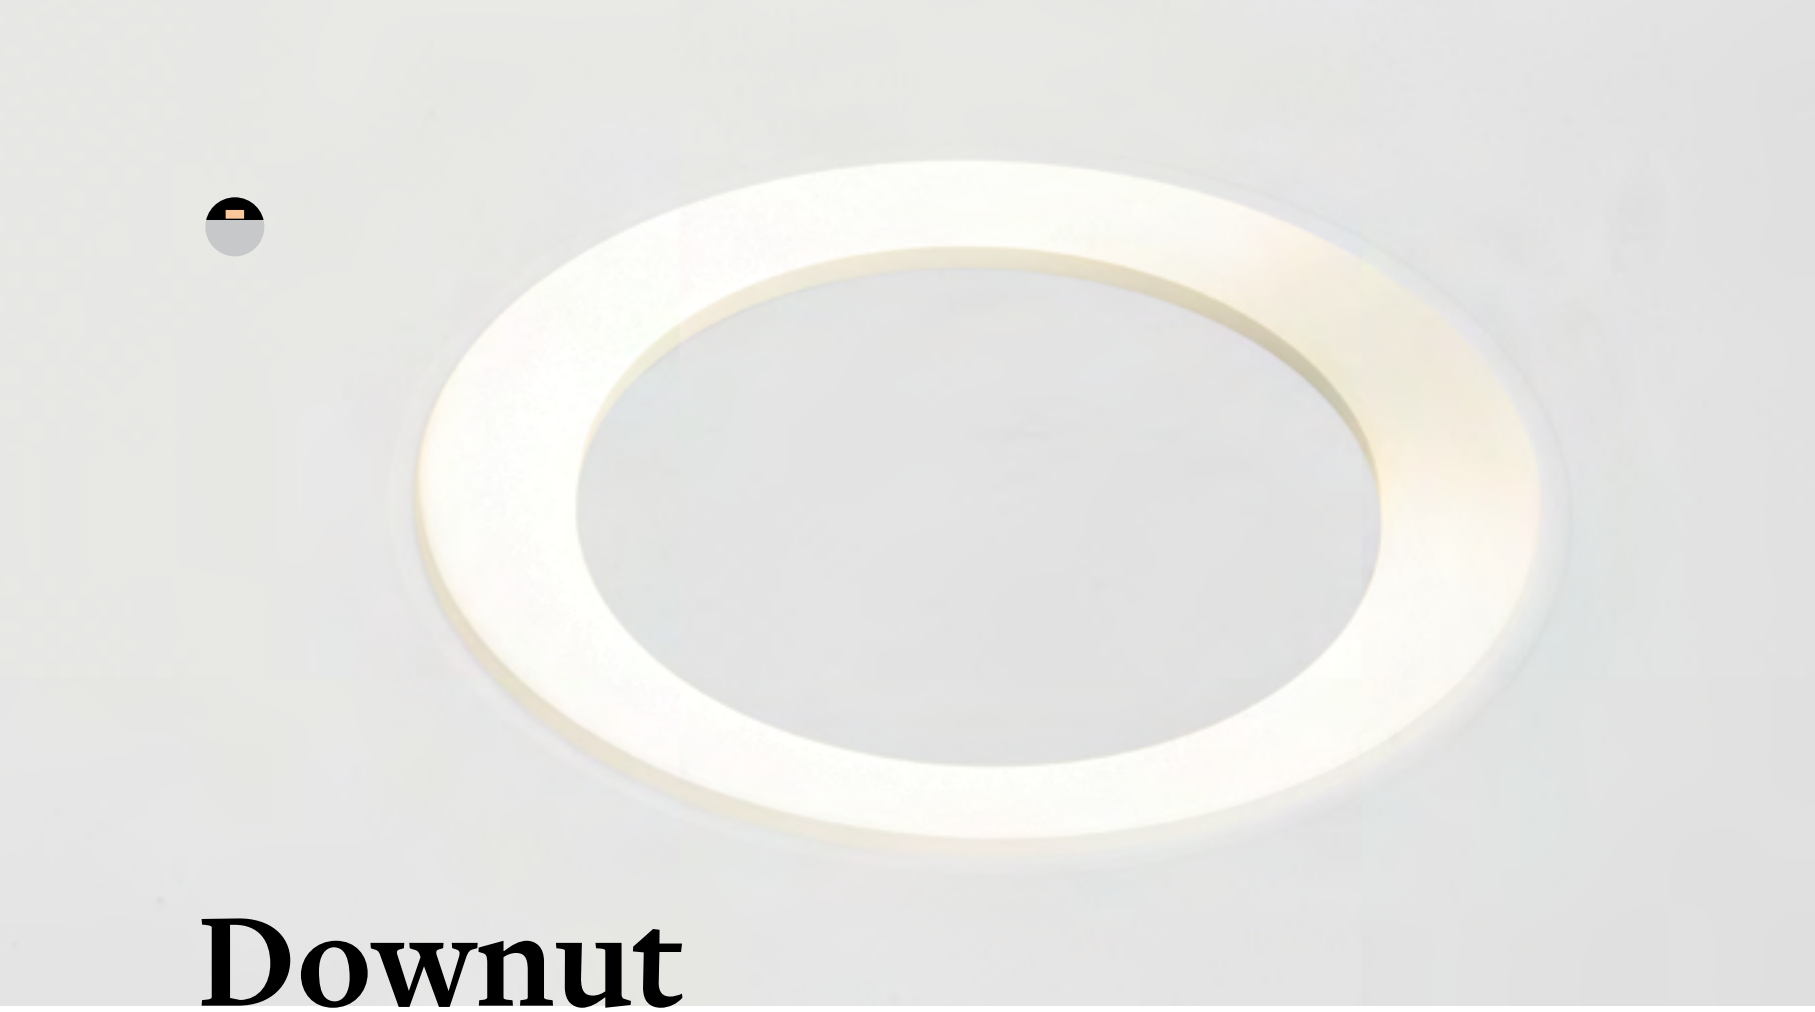

Downnut

This tantalising recessed fitting was probably inspired by an addiction to sweet treats. The perfect circle makes the lamp both playful and minimalist. Downut blends in perfectly with your architecture. The inner disc can easily be given the same colour or texture as the surrounding decor.

SUPERMODULAR.COM/EN/EN/DOWNUT

ECO FLUORESCENT GI

Downut flange 292 TL5C GI



1X T16-R | 2GX13 | 22W

NOT DIMMABLE	
white struc	**11030709**
1-10V*	
white struc	**11035709**
PUSHDIM	
white struc	**11037709**
DALI	
white struc	**11036709**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

ECO FLUORESCENT GI

Downut 350 TL5C GI



1X T16-R | 2GX13 | 55W

NOT DIMMABLE	
white struc	**11030109**
1-10V*	
white struc	**11035109**
DALI/PUSHDIM	
white struc	**11036109**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
11030330	CONBOX 440X400X120X438
11030430	GYPKIT 440X396 - Ø356

Downut

ECO FLUORESCENT GI

Downut flange 367 TL5C GI



1X T16-R 2GX13 55W

NOT DIMMABLE	
white struc	**11030209**

1-10V*	
white struc	**11035209**

DALI/PUSHDIM	
white struc	**11036209**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
11030330	CONBOX 440X400X120X438
11030430	GYPKIT 440X396 - Ø356

DOWNUT
NORWEGIAN EMBASSY, DEN HAAG (NL)
D+Z ARCHITECTEN+PROJECTMANAGERS

see also:

p. 388

Doze

Doze, what's in a name? A box of light. Doze is available in a round or square version and has a stout rim in white or black with a polycarbonate diffuser. The nice thing about Doze is that it fits perfectly into a standard electrical junction box (supplied with the luminaire), which is found in every (new) building. An efficient alternative to a standard recessed spot. Perfect for illuminating a hallway or staircase.

SUPERMODULAR.COM/EN/EN/DOZE

ECO LED

Doze 80 ceiling LED



230V | R,C | IP20 | GWT 850° | 0.14KG

TRAILING EDGE DIMMABLE	2700K / CRI80
black struc	12331032
white struc	12331009

INSTALLATION

12339930	CONBOX Ø130 H135

1X HIGH POWER LED INCL. 4.5W

! FIXTURE FITS IN STANDARD Ø68 JUNCTION BOX (INCLUDED)

ECO LED

Doze square ceiling LED



230V | R,C | IP20 | GWT 850° | 0.14KG

TRAILING EDGE DIMMABLE	2700K / CRI80
black struc	12331132
white struc	12331109

INSTALLATION

12339930	CONBOX Ø130 H135

1X HIGH POWER LED INCL. 4.5W

! FIXTURE FITS IN STANDARD Ø68 JUNCTION BOX (INCLUDED)

see also:
p. 392
p. 468

Duell

Duell has Modular written all over it. With its gentle curves, Duell gives every room a softer touch. The duo toned fixtures allow you to play with colour. For ceiling-mounted application, we offer both a recessed version and a surface-mounted version. The recessed version has an attractive broad rim. Duell surface is available in a directional variant. The complete Duell range is available in LED and is perfect for accent lighting in a room.

SUPERMODULAR.COM/EN/EN/DUELL

ECO LED GI

Duell surface 1x LED GI



1X LED ARRAY INCL. 9.2W

NOT DIMMABLE	2700K / CRI90+	
	25°	50°
black struc (gold interior)	**11073032**	**11073232**
white struc (champagne interior)	**11073009**	**11073209**

1-10V*/PUSHDIM	2700K / CRI90+	
	25°	50°
black struc (gold interior)	**11072932**	**11073132**
white struc (champagne interior)	**11072909**	**11073109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc (champagne interior))

2700K / 25°	**592lm 11W**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

HALOGEN 230V

Duell surface 1x GU10



1X QPAR 16 GU10 MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

black struc (gold interior)	**11070732**
white struc (champagne interior)	**11070709**

CONNECTED	
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

HALOGEN 12V GI

Duell surface 1x MR16 GI



1X QR-C 51 GU 5.3 MAX. 50W

TRAILING EDGE DIMMABLE	
black struc (gold interior)	**11070232**
white struc (champagne interior)	**11070209**

Duell

ECO LED GE

Duell recessed 1x LED GE



1X LED ARRAY INCL. 9.2W

Friends of hue | III | 500mA | IP20 | GWT 960° | 0.60KG

	2700K / CRI90+	
	25°	50°
white struc (black interior)	**11073829**	**11073729**
white struc (champagne interior)	**11073839**	**11073739**
white struc (gold interior)	**11073889**	**11073789**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc (champagne interior))

	350mA	**500mA**
2700K / 25°	460lm 6.2W	**592lm 9.2W**

DRIVER	SEE DRIVER MATRIX

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889830	CONBOX 190X192X130X256
12290930	GYPKIT 190X190 - 2XØ76

ECO LED GI

Duell recessed 1x LED RG





1X LED ARRAY INCL. 9.2W

230V | IP20 | GWT 960° | 0.60KG

NOT DIMMABLE	2700K / CRI90+	
	25°	50°
white struc (black interior)	**11071429**	**11071629**
white struc (champagne interior)	**11071439**	**11071639**
white struc (gold interior)	**11071489**	**11071689**

1-10V*/PUSHDIM	2700K / CRI90+	
	25°	50°
white struc (black interior)	**11071329**	**11071529**
white struc (champagne interior)	**11071339**	**11071539**
white struc (gold interior)	**11071389**	**11071589**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc (champagne interior))

2700K / 25°	**592lm 11W**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889830	CONBOX 190X192X130X256
12290930	GYPKIT 190X190 - 2XØ76

HALOGEN 12V | GE

Duell recessed 1x MR16 GE





1X QR-CBC 51 | GU 5.3 | MAX. 50W

white struc (black interior)	**11070429**
white struc (champagne interior)	**11070439**
white struc (gold interior)	**11070489**

INSTALLATION

10889830	CONBOX 190X192X130X256
12290930	GYPKIT 190X190 - 2XØ76

HALOGEN 230V

Duell recessed 1x GU10





1X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

white struc (black interior)	**11070829**
white struc (champagne interior)	**11070839**
white struc (gold interior)	**11070889**

CONNECTED

70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

INSTALLATION

10889830	CONBOX 190X192X130X256
12290930	GYPKIT 190X190 - 2XØ76

ECO | LED | GE

Duell recessed 2x LED GE





2X LED ARRAY INCL. | 9.2W

	2700K / CRI90+	
	25°	50°
white struc (black interior)	**11074229**	**11074129**
white struc (champagne interior)	**11074239**	**11074139**
white struc (gold interior)	**11074289**	**11074189**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc (champagne interior))

	350mA	**500mA**
2700K / 25°	460lm 6.2W	**592lm 9.2W**

DRIVER SEE DRIVER MATRIX

CONNECTED *WHEN CONNECTED TO 1-10V DRIVER

13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION

10889830	CONBOX 190X192X130X256
12290930	GYPKIT 190X190 - 2XØ76

Duell

ECO LED GI

Duell recessed 2x LED RG





2X LED ARRAY INCL. | 11W

230V | IP20 | GWT 960° | 0.80KG

NOT DIMMABLE	2700K / CRI90+	
	25°	50°
white struc (black interior)	**11072229**	**11072429**
white struc (champagne interior)	**11072239**	**11072439**
white struc (gold interior)	**11072289**	**11072489**

1-10V*/PUSHDIM	2700K / CRI90+	
	25°	50°
white struc (black interior)	**11072129**	**11072329**
white struc (champagne interior)	**11072139**	**11072339**
white struc (gold interior)	**11072189**	**11072389**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc (champagne interior) - values per lamp)

2700K / 25°	**592lm 11W**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889830	CONBOX 190X192X130X256
12290930	GYPKIT 190X190 - 2XØ76

HALOGEN 12V | GE

Duell recessed 2x MR16 GE





2X QR-CBC 51 | GU 5.3 | MAX. 50W

12V | IP20 | GWT 960° | 0.45KG

white struc (black interior)	**11070529**
white struc (champagne interior)	**11070539**
white struc (gold interior)	**11070589**

INSTALLATION	
10889830	CONBOX 190X192X130X256
12290930	GYPKIT 190X190 - 2XØ76

HALOGEN 230V

Duell recessed 2x GU10





2X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.60KG

white struc (black interior)	**11070929**
white struc (champagne interior)	**11070939**
white struc (gold interior)	**11070989**

CONNECTED	
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889830	CONBOX 190X192X130X256
12290930	GYPKIT 190X190 - 2XØ76

DUELL
PRIVATE RESIDENCE, PRAGUE (CZECH REPUBLIC)

Duell

DUELL
PRIVATE RESIDENCE, ROTTERDAM (NL)
ERIC KANT

DUELL
SPINDRIFT RACING, SAINT-PHILIBERT (FR)
STUDIO 02

Duell

DUELL
RESTAURANT WIESEN, EINDHOVEN (NL)
SENNAH STUDIO

DUELL
BIT, EDE (NL)
QUUB INTERIOR CONCEPTS

see also:

p. 402

Flat moon

Contemporary architectural projects love a minimalist, slim lighting design. Modular has risen to the challenge by developing a new proprietary LED PCB solution for a more homogeneous light surface. The first luminaire to integrate the new component is Flat moon, a stylish, reduced height fixture (78 mm) that distributes a soft, yet functional light. Office-compliant when combined with one of the prismatic diffusers, it is also a perfect fit for public spaces, hotels, restaurants or retail environments.

Exceptionally versatile, Flat moon can be either surface-mounted, recessed or suspended (with two types of suspension kits for either down or up/down lighter) and even directly mounted and connected onto the gear. It comes in three sizes: 450, 650 or 950 mm diameter.

SUPERMODULAR.COM/EN/FLAT-MOON

ECO LED GI

Flat moon 450 ceiling down LED GI





MED-POWER LED INCL. 26W

DALI	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13290332	13290432	13290532
white struc	13290309	13290409	13290509

1-10V*/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13290032	13290132	13290232
white struc	13290009	13290109	13290209

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

3000K	2545lm 29.4W

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

OPTICAL	
13289000	PRISMATIC DIFFUSER 450/470
13289100	ICE PRISMATIC DIFFUSER 450/470

ECO LED GI

Flat moon 450 suspension down LED GI



MED-POWER LED INCL. 26W

! SUSPENSION KIT OPTIONAL

DALI	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13300332	13300432	13300532
white struc	13300309	13300409	13300509

1-10V*/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13300032	13300132	13300232
white struc	13300009	13300109	13300209

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

3000K	2545lm 29.4W

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
13309009	FLAT MOON 450 LED COVERPLATE WHITE STRUC
13309032	FLAT MOON 450 LED COVERPLATE BLACK STRUC
11061809	SUSPENSION KIT 4M - 3X 0.75 (3 CABLES) - WHITE STRUC
11061832	SUSPENSION KIT 4M - 3X 0.75 (3 CABLES) - BLACK STRUC
11061909	SUSPENSION KIT 4M - 5X 0.75 (3 CABLES) - WHITE STRUC
11061932	SUSPENSION KIT 4M - 5X 0.75 (3 CABLES) - BLACK STRUC
11062009	SUSPENSION KIT 1 4M - 3X 0.75 - 3 TRIANGLE CABLES WHSTR
11062032	SUSPENSION KIT 1 4M - 3X 0.75 - 3 TRIANGLE CABLES BLSTR
11062109	SUSPENSION KIT 1 4M - 5X 0.75 - 3 TRIANGLE CABLES WHSTR
11062132	SUSPENSION KIT 1 4M - 5X 0.75 - 3 TRIANGLE CABLES BLSTR

OPTICAL	
13289000	PRISMATIC DIFFUSER 450/470
13289100	ICE PRISMATIC DIFFUSER 450/470

Flat moon

ECO LED GI

Flat moon 450 suspension up/down LED GI



MED-POWER LED INCL. 45W

! SUSPENSION KIT OPTIONAL

Friends of hue | 230V | IP20 | GWT 650° | 4.90KG

DALI	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13300932	13301032	13301132
white struc	13300909	13301009	13301109

1-10V*/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13300632	13300732	13300832
white struc	13300609	13300709	13300809

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

3000K	**3150lm 51W**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
11061809	SUSPENSION KIT 4M - 3X 0.75 - 3 CABLES - WHITE STRUC
11061832	SUSPENSION KIT 4M - 3X 0.75 - 3 CABLES - BLACK STRUC
11061909	SUSPENSION KIT 4M - 5X 0.75 - 3 CABLES - WHITE STRUC
11061932	SUSPENSION KIT 4M - 5X 0.75 - 3 CABLES - BLACK STRUC
11062409	SUSPENSION KIT 4M - 9X 0.75 - 3 CABLES - WHITE STRUC
11062432	SUSPENSION KIT 4M - 9X 0.75 - 3 CABLES - BLACK STRUC
11062009	SUSPENSION KIT 1 4M - 3X 0.75 - 3 TRIANGLE CABLES - WHITE STRUC
11062032	SUSPENSION KIT 1 4M - 3X 0.75 - 3 TRIANGLE CABLES - BLACK STRUC
11062109	SUSPENSION KIT 1 4M - 5X 0.75 - 3 TRIANGLE CABLES - WHITE STRUC
11062132	SUSPENSION KIT 1 4M - 5X 0.75 - 3 TRIANGLE CABLES - BLACK STRUC
11062509	SUSPENSION KIT 1 4M - 9X 0.75 - 3 TRIANGLE CABLES - WHITE STRUC
11062532	SUSPENSION KIT 1 4M - 9X 0.75 - 3 TRIANGLE CABLES - BLACK STRUC

OPTICAL	
13289000	PRISMATIC DIFFUSER 450/470
13289100	ICE PRISMATIC DIFFUSER 450/470

Flat moon

FLAT MOON 450

FLAT MOON 450 SUSPENDED WITH TRIANGLE CABLES

FLAT MOON 470 RECESSED

Flat moon

ECO LED GI

Flat moon 650 ceiling down LED GI



MED-POWER LED INCL. 50W

Friends of hue | 230V | IP20 | GWT 650° | 10.70KG

DALI	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13290932	13291032	13291132
white struc	13290909	13291009	13291109

1-10*V/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13290632	13290732	13290832
white struc	13290609	13290709	13290809

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

3000K	6070lm 53W

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

OPTICAL	
13289200	PRISMATIC DIFFUSER 650/670
13289300	ICE PRISMATIC DIFFUSER 650/670

ECO LED GI

Flat moon 650 suspension down LED GI



MED-POWER LED INCL. 50W

! SUSPENSION KIT OPTIONAL

Friends of hue | 230V | IP20 | GWT 650° | 10.10KG

DALI	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13301532	13301632	13301732
white struc	13301509	13301609	13301709

1-10V*/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13301232	13301332	13301432
white struc	13301209	13301309	13301409

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

3000K	6070lm 53W

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
13309109	FLAT MOON 650 LED COVER PLATE WHITE STRUC
13309132	FLAT MOON 650 LED COVER PLATE BLACK STRUC
11061809	SUSPENSION KIT 4M - 3X 0.75 - 3 CABLES - WHITE STRUC
11061832	SUSPENSION KIT 4M - 3X 0.75 - 3 CABLES - BLACK STRUC
11061909	SUSPENSION KIT 4M - 5X 0.75 - 3 CABLES - WHITE STRUC
11061932	SUSPENSION KIT 4M - 5X 0.75 - 3 CABLES - BLACK STRUC
11062009	SUSPENSION KIT 1 4M - 3X 0.75 - 3 TRIANGLE CABLES - WHITE STRUC
11062032	SUSPENSION KIT 1 4M - 3X 0.75 - 3 TRIANGLE CABLES - BLACK STRUC
11062109	SUSPENSION KIT 1 4M - 5X 0.75 - 3 TRIANGLE CABLES - WHITE STRUC
11062132	SUSPENSION KIT 1 4M - 5X 0.75 - 3 TRIANGLE CABLES - BLACK STRUC

OPTICAL	
13289200	PRISMATIC DIFFUSER 650/670
13289300	ICE PRISMATIC DIFFUSER 650/670

ECO LED GI

Flat moon 650 suspension up/down LED GI



MED-POWER LED INCL. 80W

! SUSPENSION KIT OPTIONAL

Friends of hue | 230V | IP20 | GWT 650° | 10.50KG

DALI	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	**13302132**	**13302232**	**13302332**
white struc	**13302109**	**13302209**	**13302309**

1-10V*/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	**13301832**	**13301932**	**13302032**
white struc	**13301809**	**13301909**	**13302009**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

3000K	**8070lm 86W**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
11061809	SUSPENSION KIT 4M - 3X 0.75 - 3 CABLES - WHITE STRUC
11061832	SUSPENSION KIT 4M - 3X 0.75 - 3 CABLES - BLACK STRUC
11061909	SUSPENSION KIT 4M - 5X 0.75 - 3 CABLES - WHITE STRUC
11061932	SUSPENSION KIT 4M - 5X 0.75 - 3 CABLES - BLACK STRUC
11062409	SUSPENSION KIT 4M - 9X 0.75 - 3 CABLES - WHITE STRUC
11062432	SUSPENSION KIT 4M - 9X 0.75 - 3 CABLES - BLACK STRUC
11062009	SUSPENSION KIT 1 4M - 3X 0.75 - 3 TRIANGLE CABLES - WHITE STRUC
11062032	SUSPENSION KIT 1 4M - 3X 0.75 - 3 TRIANGLE CABLES - BLACK STRUC
11062109	SUSPENSION KIT 1 4M - 5X 0.75 - 3 TRIANGLE CABLES - WHITE STRUC
11062132	SUSPENSION KIT 1 4M - 5X 0.75 - 3 TRIANGLE CABLES - BLACK STRUC
11062509	SUSPENSION KIT 1 4M - 9X 0.75 - 3 TRIANGLE CABLES - WHITE STRUC
11062532	SUSPENSION KIT 1 4M - 9X 0.75 - 3 TRIANGLE CABLES - BLACK STRUC

OPTICAL	
13289200	PRISMATIC DIFFUSER 650/670
13289300	ICE PRISMATIC DIFFUSER 650/670

FLAT MOON 650

FLAT MOON 450, 650, 950
KORTRIJK (BE)

Flat moon

ECO LED GI

Flat moon 950 ceiling down LED GI



MED-POWER LED INCL. 105W

Friends of hue | 230V | IP20 | GWT 650° | 17.00KG

DALI	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13291532	13291632	13291732
white struc	13291509	13291609	13291709

1-10V*/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13291232	13291332	13291432
white struc	13291209	13291309	13291409

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

3000K	12725lm 110W

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

OPTICAL	
13289400	PRISMATIC DIFFUSER 950/970
13289500	ICE PRISMATIC DIFFUSER 950/970

ECO LED GI

Flat moon 950 suspension down LED GI



MED-POWER LED INCL. 105W

! SUSPENSION KIT OPTIONAL

Friends of hue | 230V | IP20 | GWT 650° | 16.50KG

DALI	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13302732	13302832	13302932
white struc	13302709	13302809	13302909

1-10V*/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13302432	13302532	13302632
white struc	13302409	13302509	13302609

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

3000K	12725lm 110W

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
13309209	FLAT MOON 950 LED COVER PLATE WHITE STRUC
13309232	FLAT MOON 950 LED COVER PLATE BLACK STRUC
11061809	SUSPENSION KIT 4M - 3X 0.75 - 3 CABLES - WHITE STRUC
11061832	SUSPENSION KIT 4M - 3X 0.75 - 3 CABLES - BLACK STRUC
11061909	SUSPENSION KIT 4M - 5X 0.75 - 3 CABLES - WHITE STRUC
11061932	SUSPENSION KIT 4M - 5X 0.75 - 3 CABLES - BLACK STRUC
11062209	SUSPENSION KIT 2 4M - 3X 0.75 - 3 TRIANGLE CABLES - WHITE STRUC
11062232	SUSPENSION KIT 2 4M - 3X 0.75 - 3 TRIANGLE CABLES - BLACK STRUC
11062309	SUSPENSION KIT 2 4M - 5X 0.75 - 3 TRIANGLE CABLES - WHITE STRUC
11062332	SUSPENSION KIT 2 4M - 5X 0.75 - 3 TRIANGLE CABLES - BLACK STRUC

OPTICAL	
13289400	PRISMATIC DIFFUSER 950/970
13289500	ICE PRISMATIC DIFFUSER 950/970

ECO LED GI

Flat moon 950 suspension up/down LED GI



MED-POWER LED INCL. 165W

! SUSPENSION KIT OPTIONAL

Friends of hue | 230V | IP20 | GWT 650° | 17.00KG

DALI	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	**13303332**	**13303432**	**13303532**
white struc	**13303309**	**13303409**	**13303509**

1-10V*/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	**13303032**	**13303132**	**13303232**
white struc	**13303009**	**13303109**	**13303209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

3000K	**16725lm 171W**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
11061809	SUSPENSION KIT 4M - 3X 0.75 - 3 CABLES - WHITE STRUC
11061832	SUSPENSION KIT 4M - 3X 0.75 - 3 CABLES - BLACK STRUC
11061909	SUSPENSION KIT 4M - 5X 0.75 - 3 CABLES - WHITE STRUC
11061932	SUSPENSION KIT 4M - 5X 0.75 - 3 CABLES - BLACK STRUC
11062409	SUSPENSION KIT 4M - 9X 0.75 - 3 CABLES - WHITE STRUC
11062432	SUSPENSION KIT 4M - 9X 0.75 - 3 CABLES - BLACK STRUC
11062209	SUSPENSION KIT 2 4M - 3X 0.75 - 3 TRIANGLE CABLES - WHITE STRUC
11062232	SUSPENSION KIT 2 4M - 3X 0.75 - 3 TRIANGLE CABLES - BLACK STRUC
11062309	SUSPENSION KIT 2 4M - 5X 0.75 - 3 TRIANGLE CABLES - WHITE STRUC
11062332	SUSPENSION KIT 2 4M - 5X 0.75 - 3 TRIANGLE CABLES - BLACK STRUC
11062609	SUSPENSION KIT 2 4M - 9X 0.75 - 3 TRIANGLE CABLES - WHITE STRUC
11062632	SUSPENSION KIT 2 4M - 9X 0.75 - 3 TRIANGLE CABLES - BLACK STRUC

OPTICAL	
13289400	PRISMATIC DIFFUSER 950/970
13289500	ICE PRISMATIC DIFFUSER 950/970

Flat moon

ECO LED GI

Flat moon 470 recessed LED GI



MED-POWER LED INCL. 26W

DALI	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13280332	13280432	13280532
white struc	13280309	13280409	13280509

1-10V*/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13280032	13280132	13280232
white struc	13280009	13280109	13280209

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

3000K	**2545lm 29.4W**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

OPTICAL	
13289000	PRISMATIC DIFFUSER 450/470
13289100	ICE PRISMATIC DIFFUSER 450/470

ECO LED GI

Flat moon 670 recessed LED GI





MED-POWER LED INCL. 50W

DALI	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13280932	13281032	13281132
white struc	13280909	13281009	13281109

1-10V*/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13280632	13280732	13280832
white struc	13280609	13280709	13280809

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

3000K	**6070lm 53W**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

OPTICAL	
13289200	PRISMATIC DIFFUSER 650/670
13289300	ICE PRISMATIC DIFFUSER 650/670

ECO LED GI

Flat moon 970 recessed LED GI



MED-POWER LED INCL. 105W

DALI	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	**13281532**	**13281632**	**13281732**
white struc	**13281509**	**13281609**	**13281709**

1-10V*/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	**13281232**	**13281332**	**13281432**
white struc	**13281209**	**13281309**	**13281409**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

3000K	**12725lm 110W**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

OPTICAL	
13289400	PRISMATIC DIFFUSER 950/970
13289500	ICE PRISMATIC DIFFUSER 950/970

FLAT MOON
THE BURROW, SABHAN (KUWAIT)
ARCH.RASHED ALFOUDARI & ARCH.DAWOOD ALBADER (LAB100 DESIGN STUDIO)

FLAT MOON
BNP PARIBAS, AMSTERDAM (NL)
MARTIJN VELDMAN

Flat moon

FLAT MOON
EU-TOP, AMSTERDAM (NL)
EDWARD VAN VLIET

FLAT MOON
MAERLANT LYCEUM, DEN HAAG (NL)
THOMAS ARCHITECTEN

Flush gate

It's like walking towards the light at the end of the tunnel: Flush gate will open the doors to an unknown destination. The seamless, rectangular recessed panel allows the lighting effect to enhance the architecture of the room. Flush gate is fitted with compact fluorescent lamps and a matt polycarbonate panel to achieve a diffused effect. Available in various sizes.

SUPERMODULAR.COM/EN/EN/FLUSH-GATE

ECO COMPACT FLUORESCENT GI

Flush gate 1x TC-L 18W GI



1X TC-L | 2G11 | 18W

! RECESSED FRAME INCLUDED

230V | IP43 | GWT 960° | 2.00KG

NOT DIMMABLE	
shiny white	**10890101**

1-10V*	
shiny white	**10895101**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10890530	CONBOX 120X362X150X198

ECO COMPACT FLUORESCENT GI

Flush gate 2x TC-L 18W GI



2X TC-L | 2G11 | 18W

! RECESSED FRAME INCLUDED

230V | IP43 | GWT 960° | 3.10KG

NOT DIMMABLE	
shiny white	**10890201**

1-10V*	
shiny white	**10895201**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10890630	CONBOX 200X362X150X278

ECO COMPACT FLUORESCENT GI

Flush gate 2x TC-L 36W GI



2X TC-L | 2G11 | 36W

! RECESSED FRAME INCLUDED

230V | IP43 | GWT 960° | 4.12KG

NOT DIMMABLE	
shiny white	**10890301**

1-10V*	
shiny white	**10895301**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10890730	CONBOX 200X562X150X278

Flush gate

ECO | COMPACT FLUORESCENT | GI

Flush gate 2x TC-L 55W GI



2X TC-L | 2G11 | 55W

! RECESSED FRAME INCLUDED

NOT DIMMABLE	
shiny white	**10890401**

1-10V*	
shiny white	**10895401**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10890830	CONBOX 200X662X150X278

FLUSH GATE, NOMAD, DUELL, MULTIPLE
DAMEN SHIPYARD, GORKUM (NL)
LINDA LEGRAND INTERIOR DESIGN

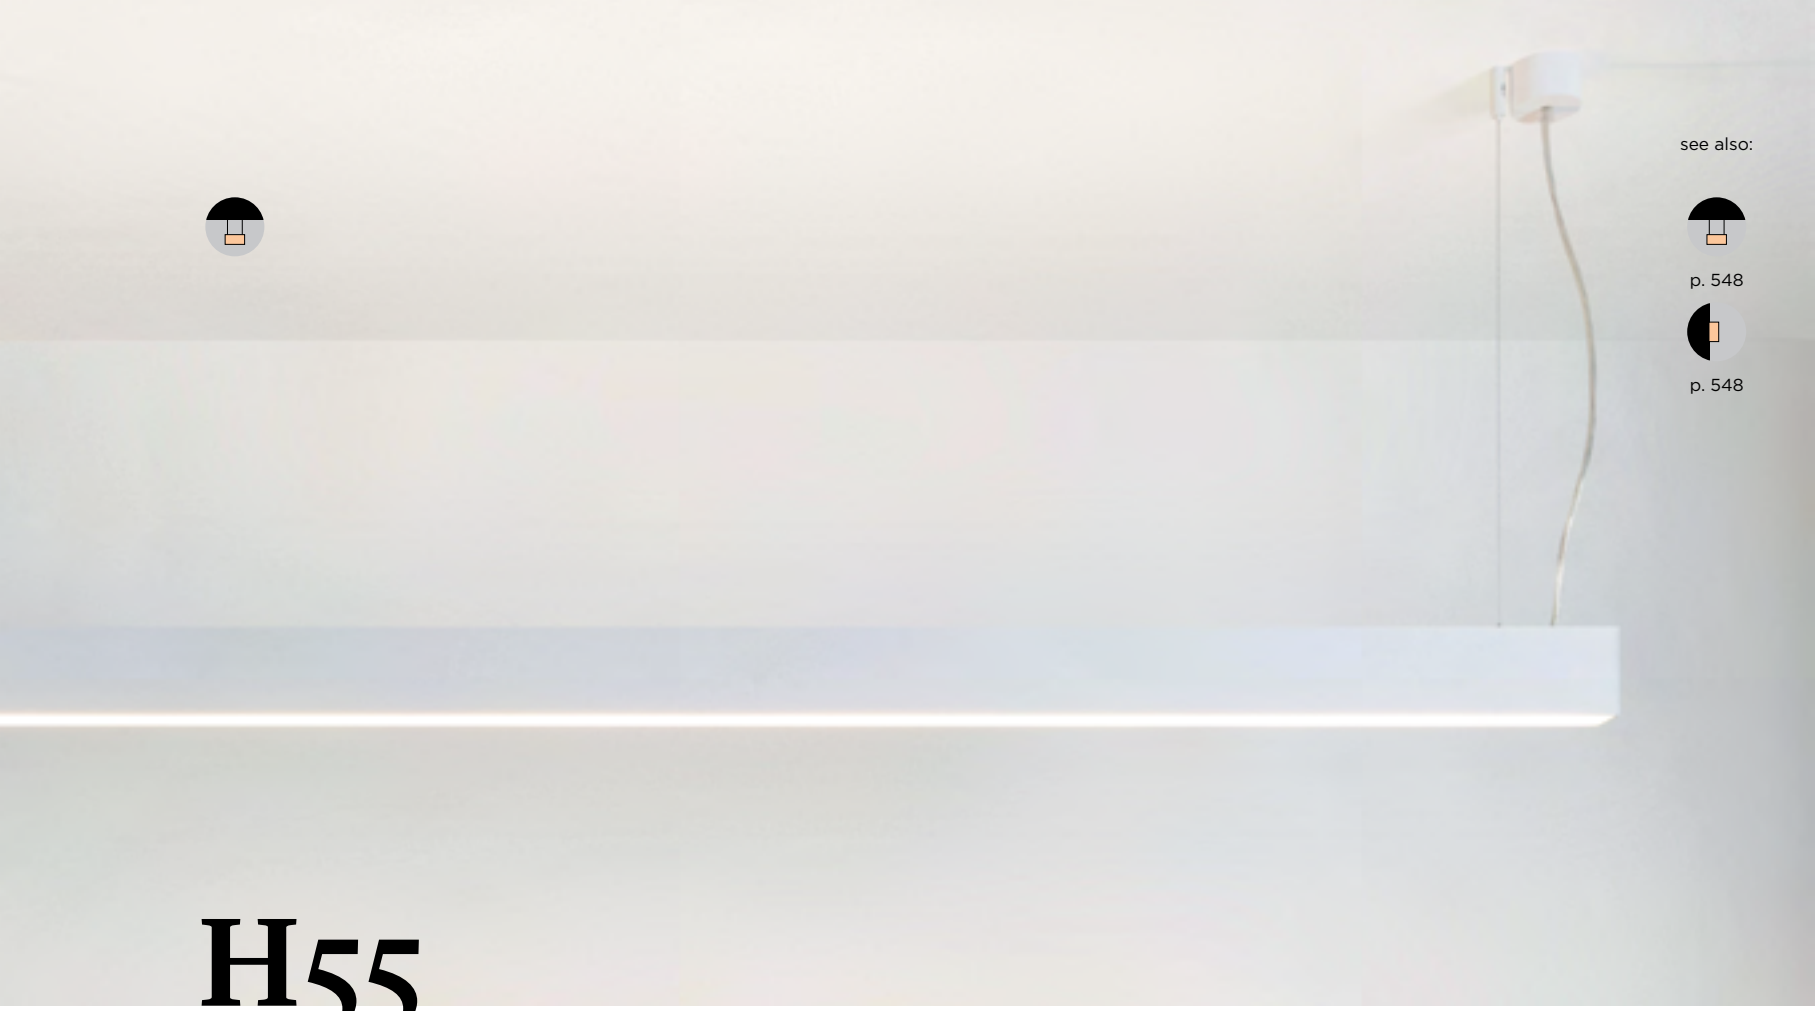

see also:

p. 548

p. 548

H55

A simple profile that casts its light both up- and downward. The ready-made version of H55 comes in a length of 1156mm and is available in aluminium or white structure. H55 is also available as a custom made solution in order to meet the rising demand for versatile architectural LED lighting lines.

SUPERMODULAR.COM/EN/H55

ECO LED GI

H55 RM suspended up/down GI

230V | IP20 | GWT 960° | 4.60KG



4X LED LINE INCL. | 6.9W | DOWN

LED-STRIP 900MM | 12.6W | UP | (NOT DIMMABLE)

LED-STRIP 800MM | 11.2W | UP | (DALI/PUSHDIM)

NOT DIMMABLE	3000K / CRI80
alu	**93530420**
white struc	**93530422**

DALI/PUSHDIM	3000K / CRI80
alu	**98530420**
white struc	**98530422**

Haloscan

The shape of the Haloscan reminds us of the ring of light which sometimes appears around the eclipsed sun or moon. As it is directional, it can be easily fitted in any room.The Haloscan 179 for LED is an upgraded version of our classic Haloscan fixture. Combined with the M-LED 111 module, Haloscan 179 for LED now gives you a wide variety of lighting colours and beam angle combinations.

SUPERMODULAR.COM/EN/HALOSCAN

ECO LED GE

Haloscan 179 for LED GE



1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 111

Friends of hue | III | IP20 | GWT 960° | 0.50KG

black struc	**10303002**
white struc	**10303009**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(M-LED 111 25° white struc)

	350mA	**500mA**	700mA	900mA
2700K / 25°	920lm 11W	**1256lm 16.25W**	1625lm 23.6W	1907lm 31.2W
3000K / 25°	904lm 11W	**1233lm 16.25W**	1596lm 23.6W	1874lm 31.2W
4000K / 25°	1053lm 11W	**1437lm 16.25W**	1860lm 23.6W	2187lm 31.2W

DRIVER	SEE DRIVER MATRIX
M-LED	SEE BELOW

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

M-LED SEE PAGES 138-141 FOR MORE INFO

11298002	M-LED 111 2700K SPOT GE BLACK MATT	**11298302**	M-LED 111 3000K SPOT GE BLACK MATT	**11298602**	M-LED 111 4000K SPOT GE BLACK MATT
11298009	M-LED 111 2700K SPOT GE WHITE STRUC	**11298309**	M-LED 111 3000K SPOT GE WHITE STRUC	**11298609**	M-LED 111 4000K SPOT GE WHITE STRUC
11298024	M-LED 111 2700K SPOT GE BRUSHED ALU	**11298324**	M-LED 111 3000K SPOT GE BRUSHED ALU	**11298624**	M-LED 111 4000K SPOT GE BRUSHED ALU
11298102	M-LED 111 2700K MEDIUM GE BLACK MATT	**11298402**	M-LED 111 3000K MEDIUM GE BLACK MATT	**11298702**	M-LED 111 4000K MEDIUM GE BLACK MATT
11298109	M-LED 111 2700K MEDIUM GE WHITE STRUC	**11298409**	M-LED 111 3000K MEDIUM GE WHITE STRUC	**11298709**	M-LED 111 4000K MEDIUM GE WHITE STRUC
11298124	M-LED 111 2700K MEDIUM GE BRUSHED ALU	**11298424**	M-LED 111 3000K MEDIUM GE BRUSHED ALU	**11298724**	M-LED 111 4000K MEDIUM GE BRUSHED ALU
11298202	M-LED 111 2700K FLOOD GE BLACK MATT	**11298502**	M-LED 111 3000K FLOOD GE BLACK MATT	**11298802**	M-LED 111 4000K FLOOD GE BLACK MATT
11298209	M-LED 111 2700K FLOOD GE WHITE STRUC	**11298509**	M-LED 111 3000K FLOOD GE WHITE STRUC	**11298809**	M-LED 111 4000K FLOOD GE WHITE STRUC
11298224	M-LED 111 2700K FLOOD GE BRUSHED ALU	**11298524**	M-LED 111 3000K FLOOD GE BRUSHED ALU	**11298824**	M-LED 111 4000K FLOOD GE BRUSHED ALU

Izar

Izar is based on a futuristic puzzle system whose basic shape - a three-pointed, rounded star - can be used either alone or in combination with other Izars. However you use it, it's impossible not to use Izar creatively in a space. For wall or ceiling mounting or use with the suspension set. Available in white and black, with matt or glossy finish.

design in cooperation with gerd couckhuyt

SUPERMODULAR.COM/EN/IZAR

ECO LED GI

Izar LED GI



1X LED INCL. 30W

Friends of hue | 230V | IP20 | GWT 960° | 4.40KG

NOT DIMMABLE	3000K / CRI90+
	115°
black matt	**11340802**
white matt	**11340838**

1-10V*	3000K / CRI90+
	115°
black matt	**11345802**
white matt	**11345838**

DALI/PUSHDIM	3000K / CRI90+
	115°
black matt	**11346802**
white matt	**11346838**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white matt)

3000K / 25°	**1830lm 33.8W**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

INSTALLATION	
11340409	SUSPENSION SET 4M (3 CABLES) - WHITE STRUC (NO POWER FEED INCLUDED)
11340432	SUSPENSION SET 4M (3 CABLES) - BLACK STRUC (NO POWER FEED INCLUDED)
11061809	SUSPENSION KIT 4M - 3X 0.75 (3 CABLES) - WHITE STRUC
11061832	SUSPENSION KIT 4M - 3X 0.75 (3 CABLES) - BLACK STRUC
11061909	SUSPENSION KIT 4M - 5X 0.75 (3 CABLES) - WHITE STRUC
11061932	SUSPENSION KIT 4M - 5X 0.75 (3 CABLES) - BLACK STRUC
11064009	SUSPENSION KIT RECESSED 4M - 3X 0.75 (3 CABLES) - WHSTR/WHSTR
11064058	SUSPENSION KIT RECESSED 4M - 3X 0.75 (3 CABLES) - WHSTR/BLSTR
11064059	SUSPENSION KIT RECESSED 4M - 3X 0.75 (3 CABLES) - WHSTR/ALU
11064109	SUSPENSION KIT RECESSED 4M - 5X 0.75 (3 CABLES) - WHSTR/WHSTR
11064158	SUSPENSION KIT RECESSED 4M - 5X 0.75 (3 CABLES) - WHSTR/BLSTR
11064159	SUSPENSION KIT RECESSED 4M - 5X 0.75 (3 CABLES) - WHSTR/ALU

ELECTRICAL	
11340702	IZAR ELECTRICAL CONNECTION BLACK MATT
11340738	IZAR ELECTRICAL CONNECTION WHITE STRUC

Izar

ECO COMPACT FLUORESCENT GI

230V IP20 GWT 960° 4.85KG

Izar TC-L GI



NOT DIMMABLE	
shiny black	11340136
shiny white	11340101

DALI/PUSHDIM	
shiny black	11346136
shiny white	11346101

3X TC-L 2G11 24W

! DIMMABLE: MAX. 12 LUMINAIRES ON A 16A FUSE

INSTALLATION	
11340409	SUSPENSION SET 4M (3 CABLES) - WHITE STRUC (NO POWER FEED INCLUDED)
11340432	SUSPENSION SET 4M (3 CABLES) - BLACK STRUC (NO POWER FEED INCLUDED)
11061809	SUSPENSION KIT 4M - 3X 0.75 (3 CABLES) - WHITE STRUC
11061832	SUSPENSION KIT 4M - 3X 0.75 (3 CABLES) - BLACK STRUC
11061909	SUSPENSION KIT 4M - 5X 0.75 (3 CABLES) - WHITE STRUC
11061932	SUSPENSION KIT 4M - 5X 0.75 (3 CABLES) - BLACK STRUC
11064009	SUSPENSION KIT RECESSED 4M - 3X 0.75 (3 CABLES) - WHSTR/WHSTR
11064058	SUSPENSION KIT RECESSED 4M - 3X 0.75 (3 CABLES) - WHSTR/BLSTR
11064059	SUSPENSION KIT RECESSED 4M - 3X 0.75 (3 CABLES) - WHSTR/ALU
11064109	SUSPENSION KIT RECESSED 4M - 5X 0.75 (3 CABLES) - WHSTR/WHSTR
11064158	SUSPENSION KIT RECESSED 4M - 5X 0.75 (3 CABLES) - WHSTR/BLSTR
11064159	SUSPENSION KIT RECESSED 4M - 5X 0.75 (3 CABLES) - WHSTR/ALU

ELECTRICAL	
11340702	IZAR ELECTRICAL CONNECTION BLACK MATT
11340738	IZAR ELECTRICAL CONNECTION WHITE STRUC

IZAR
DENTAL CLINIC, OTTAWA (CA)
SOUTHAM DESIGN

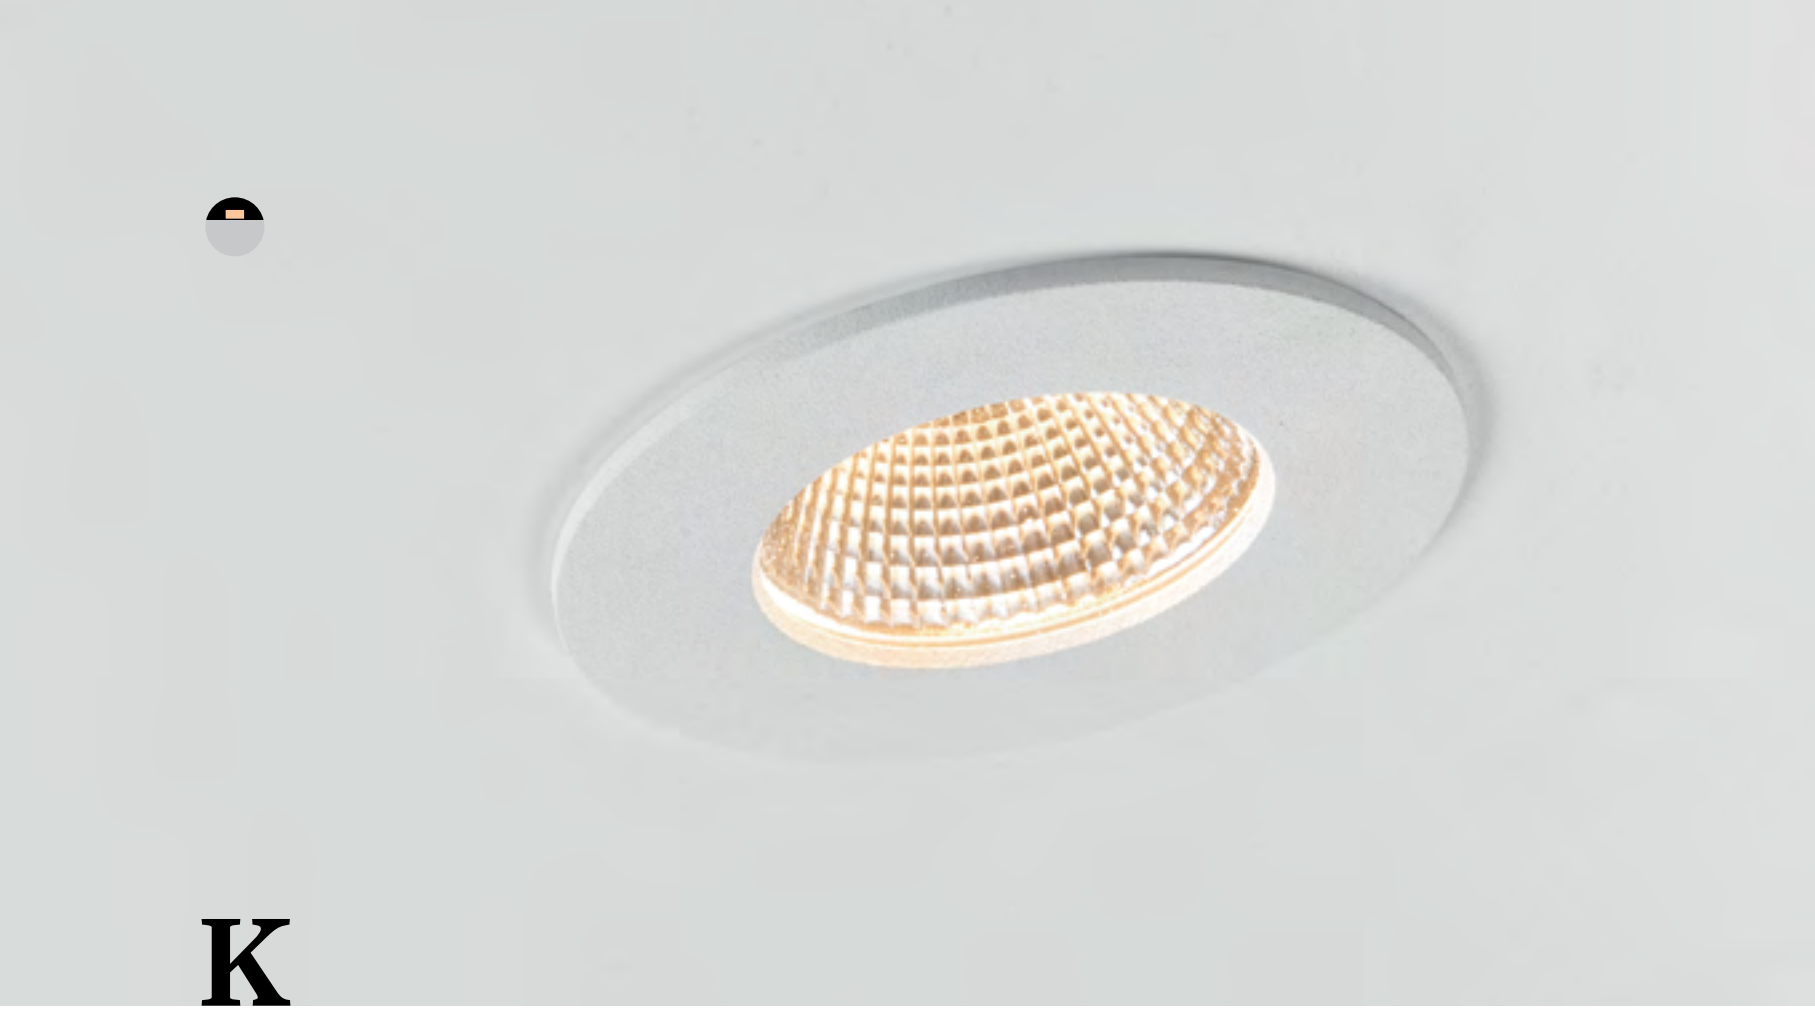

K

K already earned its spurs in the Modular range. With the LED dedicated K72 and K77 adjustable we honour an icon. A timeless product that will remain in the Modular portfolio for many years to come. Suitable for general and accent lighting.

SUPERMODULAR.COM/EN/K

ECO LED GE

K72 IP54 LED GE



1X LED ARRAY INCL. 9.2W

! 3500K ON REQUEST

	2700K / CRI90+			3000K / CRI90+			4000K / CRI90+		
	15°	25°	40°	15°	25°	40°	15°	25°	40°
donkey grey struc	**14040071**	**14040171**	**14040271**	**14040371**	**14040471**	**14040571**	**14040671**	**14040771**	**14040871**
white struc	**14040009**	**14040109**	**14040209**	**14040309**	**14040409**	**14040509**	**14040609**	**14040709**	**14040809**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	**500mA**
2700K / 25°	519lm 6.2W	**667lm 9.2W**
3000K / 25°	550lm 6.2W	**739lm 9.2W**
4000K / 25°	590lm 6.2W	**792lm 9.2W**

DRIVER	SEE DRIVER MATRIX

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10490330	CONBOX 112X172X100X236
12291330	GYPKIT 170X112 - Ø65

ECO LED GI

K72 IP54 LED RG



1X LED ARRAY INCL. 9.2W

! 3500K ON REQUEST

TRAILING EDGE DIMMABLE	2700K / CRI90+			3000K / CRI90+			4000K / CRI90+		
	15°	25°	40°	15°	25°	40°	15°	25°	40°
donkey grey struc	**14041071**	**14041171**	**14041271**	**14041371**	**14041471**	**14041571**	**14041671**	**14041771**	**14041871**
white struc	**14041009**	**14041109**	**14041209**	**14041309**	**14041409**	**14041509**	**14041609**	**14041709**	**14041809**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

2700K / 25°	**667lm 12W**
3000K / 25°	**739lm 12W**
4000K / 25°	**792lm 12W**

INSTALLATION	
10490330	CONBOX 112X172X100X236
12291330	GYPKIT 170X112 - Ø65

K77 adjustable

K77 ADJUSTABLE

K77 ADJUSTABLE

ECO LED GE

K77 adjustable LED GE



1X LED ARRAY INCL. 9.2W

! 3500K ON REQUEST

Friends of hue · III · 500mA · IP20 · GWT 960° · 0.21KG

	2700K / CRI90+			3000K / CRI90+			4000K / CRI90+		
	15°	25°	40°	15°	25°	40°	15°	25°	40°
donkey grey struc	**14050071**	**14050171**	**14050271**	**14050371**	**14050471**	**14050571**	**14050671**	**14050771**	**14050871**
white struc	**14050009**	**14050109**	**14050209**	**14050309**	**14050409**	**14050509**	**14050609**	**14050709**	**14050809**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	**500mA**
2700K / 25°	519lm 6.2W	**667lm 9.2W**
3000K / 25°	550lm 6.2W	**739lm 9.2W**
4000K / 25°	590lm 6.2W	**792lm 9.2W**

DRIVER — SEE DRIVER MATRIX

CONNECTED — *WHEN CONNECTED TO 1-10V DRIVER

13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70

ECO LED GI

K77 adjustable LED RG



1X LED ARRAY INCL. 9.2W

! 3500K ON REQUEST

230V · R,C · IP20 · GWT 960° · 0.31KG

TRAILING EDGE DIMMABLE	2700K / CRI90+			3000K / CRI90+			4000K / CRI90+		
	15°	25°	40°	15°	25°	40°	15°	25°	40°
donkey grey struc	**14051071**	**14051171**	**14051271**	**14051371**	**14051471**	**14051571**	**14051671**	**14051771**	**14051871**
white struc	**14051009**	**14051109**	**14051209**	**14051309**	**14051409**	**14051509**	**14051609**	**14051709**	**14051809**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

2700K / 25°	**667lm 12W**
3000K / 25°	**739lm 12W**
4000K / 25°	**792lm 12W**

INSTALLATION

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70

K

K72
BONTINCK ARCHITECTURE AND ENGINEERING NV, GENT (BE)

HALOGEN 230V

K-0 80 GU10



1X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.16KG

alu	**10274805**
black	**10274802**
white struc	**10274801**

CONNECTED	
70000613	PHILIPS HUE RGB GU10 BULB 6.5W
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70

OPTICAL	
10280102	BL RING Ø50 HIGH BLACK

HALOGEN 12V | GE

K-0 80 MR16 GE





1X QR-CBC 51 | GX5.3 | MAX. 50W

III | 12V | IP20 | GWT 960° | 0.09KG

alu	**10270005**
black	**10270002**
white struc	**10270001**

INSTALLATION	
10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70

OPTICAL	
10280102	BL RING Ø50 HIGH BLACK

HALOGEN 230V

K-1 89 GU10





1X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.26KG

alu	**10274905**
black	**10274902**
white struc	**10274901**

CONNECTED	
70000613	PHILIPS HUE RGB GU10 BULB 6.5W
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889830	CONBOX 190X192X130X256
12290230	GYPKIT 190X190 - Ø80

OPTICAL	
10280102	BL RING Ø50 HIGH BLACK

K

HALOGEN 12V | GE

K-1 89 MR16 GE



1X QR-CBC 51 | GX5.3 | MAX. 50W

alu	**10270105**
black	**10270102**
white struc	**10270101**

INSTALLATION

10889830	CONBOX 190X192X130X256
12290230	GYPKIT 190X190 - Ø80

OPTICAL

10280102	BL RING Ø50 HIGH BLACK

HALOGEN 230V

K-2 80 GU10



1X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

alu	**10275205**
black	**10275202**
white struc	**10275209**

CONNECTED

70000613	PHILIPS HUE RGB GU10 BULB 6.5W
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

INSTALLATION

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70

OPTICAL

10280102	BL RING Ø50 HIGH BLACK

HALOGEN 12V | GE

K-2 80 MR16 GE



1X QR-CBC 51 | GX5.3 | MAX. 50W

alu	**10270205**
black	**10270202**
white struc	**10270201**

INSTALLATION

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70

OPTICAL

10280102	BL RING Ø50 HIGH BLACK

HALOGEN 230V

K-3 89 GU10





1X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

230V | R | IP20 | GWT 960° | 0.13KG

alu	**10275305**
black	**10275302**
white struc	**10275309**

CONNECTED	
70000613	PHILIPS HUE RGB GU10 BULB 6.5W
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889830	CONBOX 190X192X130X256
12290230	GYPKIT 190X190 - Ø80

OPTICAL	
10280102	BL RING Ø50 HIGH BLACK

HALOGEN 12V | GE

K-3 89 MR16 GE





1X QR-CBC 51 | GX5.3 | MAX. 50W

12V | IP20 | GWT 960° | 0.11KG

alu	**10270305**
black	**10270302**
white struc	**10270301**

INSTALLATION	
10889830	CONBOX 190X192X130X256
12290230	GYPKIT 190X190 - Ø80

OPTICAL	
10280102	BL RING Ø50 HIGH BLACK

Kanon

Interior designers in search of spotlight track lighting that combines exceptional brightness with great design are now armed with Modular's 'Kanon'. The most powerful spotlight in our portfolio (more than 5000 lumens), Kanon 'fires' light, while looking sleek and elegant, with all wiring and cables hidden. Designed for retail environments, it is a sure-fire guarantee that your merchandise will be illuminated in style.

design in cooperation with couvreur-devos

REFINED AND STYLISH

Kanon is a simple, versatile spotlight with a refined fixture hardly ever found in track lighting. While all the wiring and gear – even screws – are smartly hidden, the outer bracket, so typical of a track spotlight, is neatly shaped to follow the lines of the housing.

STRIKING PERFORMANCE: MORE THAN 5000 LUMENS

Kanon is an energy-efficient LED fixture, available in two levels of luminous efficacy: Kanon 110 delivers up to 3500 lumens, while its bigger brother Kanon 138 reaches more than 5000 lumens – which makes it the most powerful spotlight in the Modular family. Thanks to this brightness, Kanon 138 is an ideal choice for showrooms or shops with a high ceiling.

SMARTLY LOCKABLE

Versatile as it is, Kanon easily rotates 365° and has an inclination of 90°. Rather maintain it in a fixed position? The Kanon spotlight is lockable – with invisible screws, as befits its sleek, neat design.

SUPERMODULAR.COM/EN/KANON

ECO LED GI

Kanon track 110 LED GI



1X LED ARRAY INCL. 39.8W

! 3500K ON REQUEST

TRAILING EDGE DIMMABLE	2700K / CRI90+				3000K / CRI90+				4000K / CRI90+			
	15°	25°	40°	60°	15°	25°	40°	60°	15°	25°	40°	60°
black struc	13150032	13150132	13150232	13150332	13150432	13150532	13150632	13150732	13150832	13150932	13151032	13151132
white struc	13150009	13150109	13150209	13150309	13150409	13150509	13150609	13150709	13150809	13150909	13151009	13151109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

2700K / 25°	**3107lm 45W**
3000K / 25°	**3222lm 45W**
4000K / 25°	**3483lm 45W**

TRACK	SEE BELOW

OPTICAL	
10216700	TRANSPARANT GLASS Ø77
10216703	SPREADLENS Ø77
10216430	REFLECTOR Ø80 H39 LED SPOT
10216530	REFLECTOR Ø80 H39 LED MEDIUM
10216630	REFLECTOR Ø80 H39 LED FLOOD
10216730	REFLECTOR LED Ø80 WIDE FLOOD H39

ECO LED GI

Kanon track 138 LED GI



1X LED ARRAY INCL. 49.7W

! 3500K ON REQUEST

TRAILING EDGE DIMMABLE	2700K / CRI90+				3000K / CRI90+				4000K / CRI90+			
	15°	25°	40°	60°	15°	25°	40°	60°	15°	25°	40°	60°
black struc	13160032	13160132	13160232	13160332	13160432	13160532	13160632	13160732	13160832	13160932	13161032	13161132
white struc	13160009	13160109	13160209	13160309	13160409	13160509	13160609	13160709	13160809	13160909	13161009	13161109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

2700K / 25°	**4786lm 56W**
3000K / 25°	**4963lm 56W**
4000K / 25°	**5365lm 56W**

TRACK	SEE BELOW

OPTICAL	
10216800	TRANSPARANT GLASS Ø107
10216803	SPREADLENS Ø107
10216030	REFLECTOR Ø111 LED SPOT
10216130	REFLECTOR Ø111 LED MEDIUM
10216230	REFLECTOR Ø111 LED FLOOD
10216330	REFLECTOR Ø111 LED WIDE FLOOD

TRACK					FOR ADDITIONAL TRACK COMPONENTS SEE GOODIES
11240101	TRACK PROFILE SURFACE 2M SHINY WHITE	**11240601**	TRACK POWER FEED SURFACE LEFT SHINY WHITE	**11241701**	TRACK POWER FEED RECESSED LEFT SHINY WHITE
11240102	TRACK PROFILE SURFACE 2M BLACK	**11240602**	TRACK POWER FEED SURFACE LEFT BLACK	**11241702**	TRACK POWER FEED RECESSED LEFT BLACK
11240105	TRACK PROFILE SURFACE 2M ALU	**11240605**	TRACK POWER FEED SURFACE LEFT ALU	**11241705**	TRACK POWER FEED RECESSED LEFT ALU
11240301	TRACK PROFILE RECESSED 2M SHINY WHITE	**11241401**	TRACK COVER ENDPLATE SHINY WHITE	**11242201**	TRACK PROFILE SURFACE 1M SHINY WHITE
11240302	TRACK PROFILE RECESSED 2M BLACK	**11241402**	TRACK COVER ENDPLATE BLACK	**11242202**	TRACK PROFILE SURFACE 1M BLACK
11240305	TRACK PROFILE RECESSED 2M ALU	**11241405**	TRACK COVER ENDPLATE ALU	**11242205**	TRACK PROFILE SURFACE 1M ALU
11240501	TRACK POWER FEED SURFACE RIGHT SHINY WHITE	**11241601**	TRACK POWER FEED RECESSED RIGHT SHINY WHITE	**11242401**	TRACK PROFILE RECESSED 1M SHINY WHITE
11240502	TRACK POWER FEED SURFACE RIGHT BLACK	**11241602**	TRACK POWER FEED RECESSED RIGHT BLACK	**11242402**	TRACK PROFILE RECESSED 1M BLACK
11240505	TRACK POWER FEED SURFACE RIGHT ALU	**11241605**	TRACK POWER FEED RECESSED RIGHT ALU	**11242405**	TRACK PROFILE RECESSED 1M ALU

Kanon

KANON 110

KANON 138

A SUIVRE, KORTRIJK (BE)

SHOWROOM MANUTTI (BE)

Kanon

KANON
HOTEL V FIZEAUSTRAAT, AMSTERDAM (NL)
MIRJAM ESPINOSA

A SUIVRE, KORTRIJK (BE)

Kurk

After Scotty and Spock, we now also have Kurk, another new resident in the LED disc fixture universe. Kurk's unique, luminous LED disc is a little simpler than that of its brothers. There are eight integrated lighting points which combine into one homogeneous beam. Its extremely low mounting height makes it very easy to install. Kurk surface is the mounted model in the family, which allows you to play with black and white contrasts.

SUPERMODULAR.COM/EN/KURK

ECO LED GE

Kurk surface IP40 LED GE



1X LED DISC INCL. 13W

Friends of hue | 700mA | IP40 | GWT 960° | 0.80KG

	2700K / CRI85+
	45°
black struc (black struc interior)	**12640056**
black struc (white struc interior)	**12640047**
white struc (black struc interior)	**12640058**
white struc (white struc interior)	**12640009**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(45° white struc interior)

	700mA
2700K / 45°	**482lm 13W**

DRIVER	SEE DRIVER MATRIX

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

ECO LED GI

Kurk surface IP40 LED GI





1X LED DISC INCL. 13W

Friends of hue | 230V | IP40 | GWT 960° | 1.60KG

NOT DIMMABLE	2700K / CRI85+
	45°
black struc (black struc interior)	**12641056**
black struc (white struc interior)	**12641047**
white struc (black struc interior)	**12641058**
white struc (white struc interior)	**12641009**

DALI	2700K / CRI85+
	45°
black struc (black struc interior)	**12643056**
black struc (white struc interior)	**12643047**
white struc (black struc interior)	**12643058**
white struc (white struc interior)	**12643009**

1-10V*/PUSHDIM	2700K / CRI85+
	45°
black struc (black struc interior)	**12642056**
black struc (white struc interior)	**12642047**
white struc (black struc interior)	**12642058**
white struc (white struc interior)	**12642009**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(45° white struc interior)

2700K / 45°	**582lm 16W**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

Kurk surface

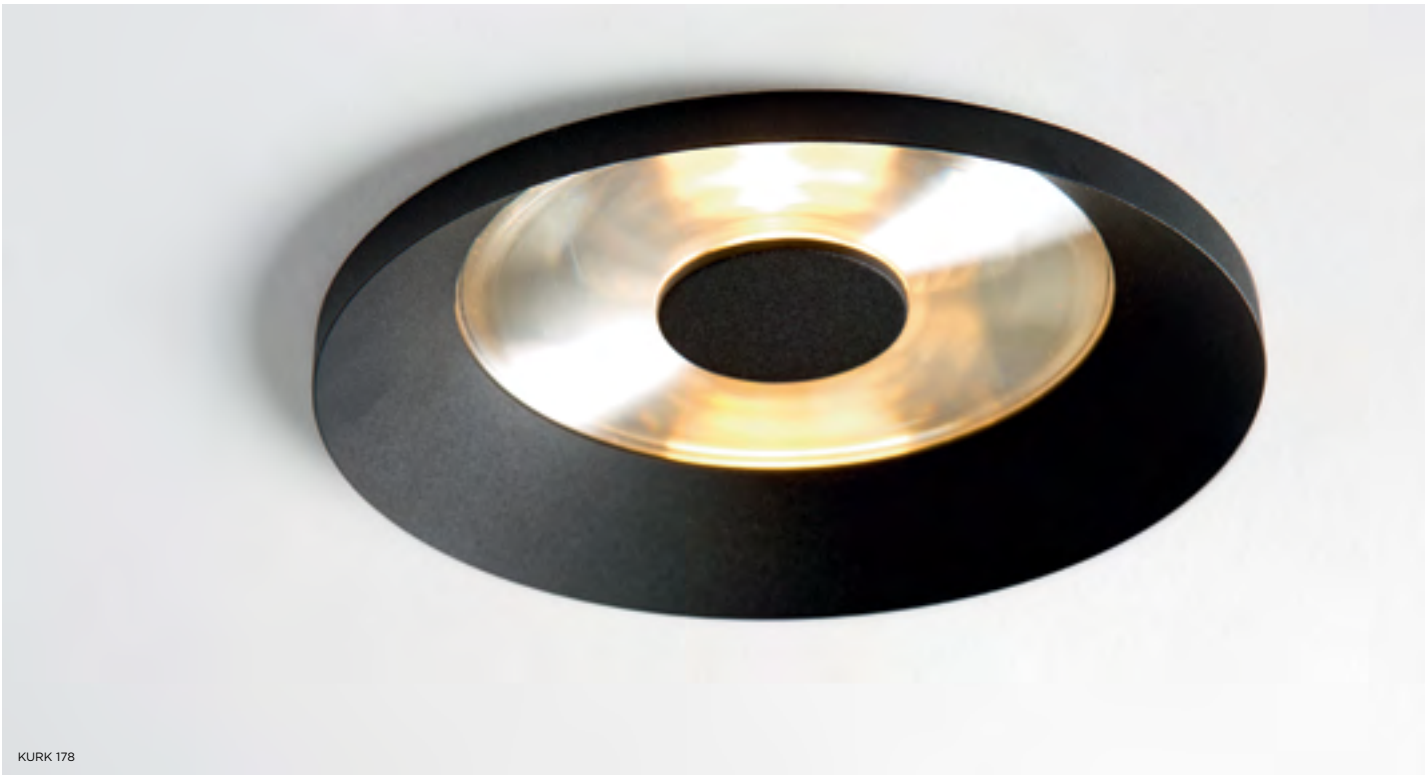

KURK 178

KURK 178 TRIMLESS

ECO LED GE

Kurk 178 IP40 LED GE



1X LED DISC INCL. 13W

	2700K / CRI85+
	45°
black struc	**12633032**
white struc	**12633009**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(45° white struc interior)

	700mA
2700K / 45°	**482lm 13W**

DRIVER	SEE DRIVER MATRIX

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
12049730	RECESSED RING Ø179 ALU

ECO LED GI

Kurk 178 IP40 LED RG



1X LED DISC INCL. 13W

	2700K / CRI85+
	45°
white struc	**12630009**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(45° white struc interior)

2700K / 45°	**482lm 16W**

INSTALLATION	
12049730	RECESSED RING Ø179 ALU

KURK
PRIVATE RESIDENCE, MURCIA (ES)
AD-HOC > ARQUITECTURA + TERRITORIO

Kurk

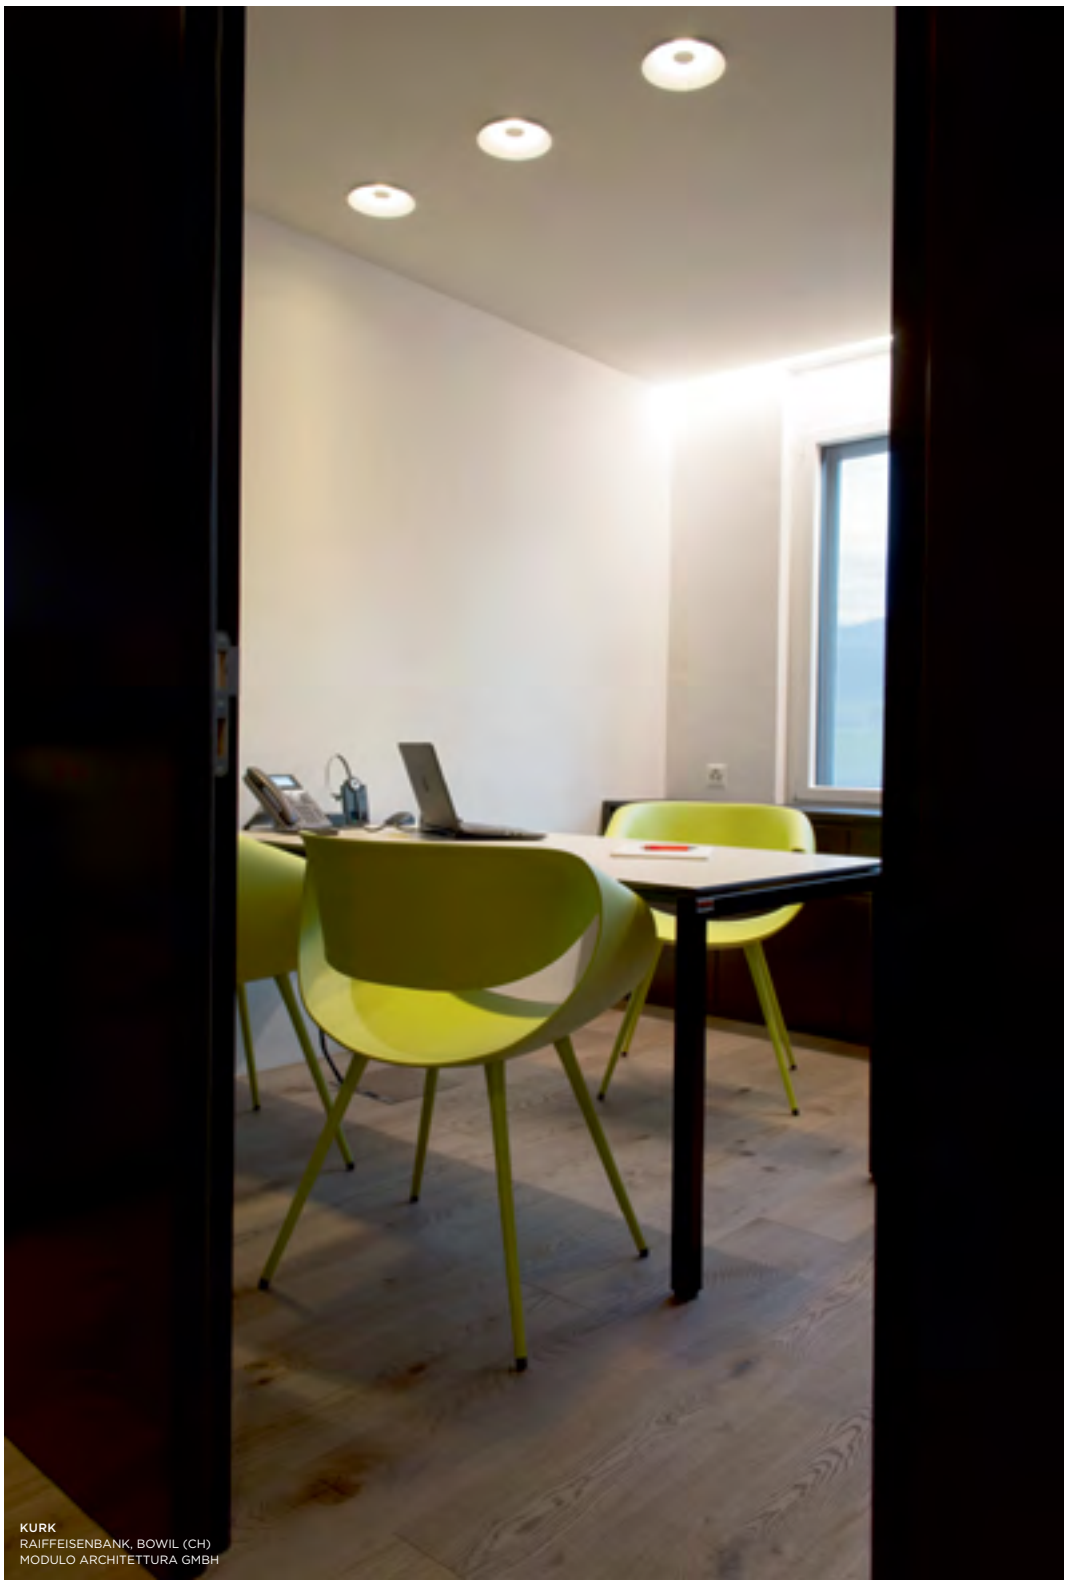

KURK
RAIFFEISENBANK, BOWIL (CH)
MODULO ARCHITETTURA GMBH

KURK
PRIVATE RESIDENCE, PRAGUE (CZECH REPUBLIC)

Lotis / Asy lotis

Lotis is the recessed spotlight where it all began... the best-known fixture in our family. The hallmark of this luminaire is its deeply recessed cone which holds the light source and has a fine edge. Known for its effortless design and high functionality, Lotis comes in different diameters and with different light sources.
Asy lotis has all the features of a normal Lotis family member with one additional benefit: asymmetry. The light shines down at an angle of 28°, which creates an attractive wash effect on the wall.

The complete Lotis range now also comes in an upgraded Lotis for LED version, using our M-LED 50 module. This allows you to choose from a large range of lighting colours (2700-4000K) and three different beam angles (spot, medium or flood).

SUPERMODULAR.COM/EN/LOTIS

ECO LED GE

Lotis 82 for LED GE





1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 50

alu	**13080005**
black	**13080002**
gold	**13080046**
white struc	**13080009**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(M-LED 50 25°)

	350mA	**500mA**
2700K / 25°	406lm 6.2W	**521lm 9.2W**
3000K / 25°	430lm 6.2W	**577lm 9.2W**
3500K / 25°	446lm 6.2W	**600lm 9.2W**
4000K / 25°	459lm 6.2W	**616lm 9.2W**

DRIVER	SEE DRIVER MATRIX
M-LED	SEE BELOW

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889830	CONBOX 190X192X130X256
12290830	GYPKIT 190X190 - Ø76

ECO LED

Lotis 82 LED retrofit





1X LED GU10 INCL. GU10 5.4W

LEADING EDGE DIMMABLE	2700K / CRI90
	25°
alu	**11450005**
black	**11450002**
gold	**11450046**
white struc	**11450009**

INSTALLATION	
10889830	CONBOX 190X192X130X256
12290830	GYPKIT 190X190 - Ø76

M-LED						SEE PAGES 138-141 FOR MORE INFO
14060005	M-LED 50 2700K 15° GE ALU	**14060505**	M-LED 50 3000K 40° GE ALU	**14061005**	M-LED 50 4000K 25° GE ALU
14060105	M-LED 50 2700K 25° GE ALU	**14060605**	M-LED 50 3500K 15° GE ALU	**14061105**	M-LED 50 4000K 40° GE ALU
14060205	M-LED 50 2700K 40° GE ALU	**14060705**	M-LED 50 3500K 25° GE ALU	**14061205**	M-LED 50 2000-3000K 15° GE ALU
14060305	M-LED 50 3000K 15° GE ALU	**14060805**	M-LED 50 3500K 40° GE ALU	**14061305**	M-LED 50 2000-3000K 25° GE ALU
14060405	M-LED 50 3000K 25° GE ALU	**14060905**	M-LED 50 4000K 15° GE ALU	**14061405**	M-LED 50 2000-3000K 40° GE ALU

Lotis

HALOGEN 12V | GE

Lotis 82 MR16 GE



1X QR-CBC 51 | GX5.3 | MAX. 50W

III | 12V | IP20 | GWT 960° | 0.10KG

alu	**10880105**
black	**10880102**
gold	**10880146**
white struc	**10880109**

INSTALLATION

10889830	CONBOX 190X192X130X256
12290830	GYPKIT 190X190 - Ø76

HALOGEN 230V

Lotis 82 GU10



1X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.15KG

alu	**10881005**
black	**10881002**
gold	**10881046**
white struc	**10881009**

CONNECTED

70000613	PHILIPS HUE RGB GU10 BULB 6.5W
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

INSTALLATION

10889830	CONBOX 190X192X130X256
12290830	GYPKIT 190X190 - Ø76

ECO | LED | GE

Lotis 82 concrete for LED GE





1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 50

Friends of hue | III | IP20 | GWT 960° | 0.12KG

black	**13080102**
white struc	**13080109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(M-LED 50 25°)

	350mA	**500mA**
4000K / 25°	459lm 6.2W	**616lm 9.2W**
3000K / 25°	430lm 6.2W	**577lm 9.2W**
3500K / 25°	446lm 6.2W	**600lm 9.2W**
2700K / 25°	406lm 6.2W	**521lm 9.2W**

DRIVER — SEE DRIVER MATRIX

M-LED — SEE BELOW

CONNECTED — *WHEN CONNECTED TO 1-10V DRIVER

13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

M-LED — SEE PAGES 138-141 FOR MORE INFO

14060005	M-LED 50 2700K 15° GE ALU	**14060505**	M-LED 50 3000K 40° GE ALU	**14061005**	M-LED 50 4000K 25° GE ALU
14060105	M-LED 50 2700K 25° GE ALU	**14060605**	M-LED 50 3500K 15° GE ALU	**14061105**	M-LED 50 4000K 40° GE ALU
14060205	M-LED 50 2700K 40° GE ALU	**14060705**	M-LED 50 3500K 25° GE ALU	**14061205**	M-LED 50 2000-3000K 15° GE ALU
14060305	M-LED 50 3000K 15° GE ALU	**14060805**	M-LED 50 3500K 40° GE ALU	**14061305**	M-LED 50 2000-3000K 25° GE ALU
14060405	M-LED 50 3000K 25° GE ALU	**14060905**	M-LED 50 4000K 15° GE ALU	**14061405**	M-LED 50 2000-3000K 40° GE ALU

HALOGEN 12V | GE

Lotis 82 concrete MR16 GE



1X QR-CBC 51 | GX5.3 | MAX. 50W

black	**12560002**
white struc	**12560009**

12V | IP20 | GWT 960° | 0.15KG

HALOGEN 230V

Lotis 82 concrete GU10



1X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

black	**12561002**
white struc	**12561009**

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.17KG

CONNECTED	
70000613	PHILIPS HUE RGB GU10 BULB 6.5W
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

ECO | LED | GE

Lotis 86 IP55 for LED GE





1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 50

alu struc	**13090028**
black struc	**13090008**
white struc	**13090009**

Friends of hue | IP55 | GWT 960° | 0.16KG

LUMINAIRE OUTPUT & POWER CONSUMPTION
(M-LED 50 25°)

	350mA	**500mA**
4000K / 25°	525lm 6.2W	**704lm 9.2W**
3500K / 25°	496lm 6.2W	**667lm 9.2W**
3000K / 25°	478lm 6.2W	**642lm 9.2W**
2700K / 25°	451lm 6.2W	**580lm 9.2W**

DRIVER	SEE DRIVER MATRIX
M-LED	SEE LEFT PAGE

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889830	CONBOX 190X192X130X256
12290230	GYPKIT 190X190 - Ø80

Lotis

ECO LED

Lotis 86 IP55 LED retrofit



230V | R,L | IP55 | GWT 960° | 0.45KG

LEADING EDGE DIMMABLE	2700K / CRI90
	25°
alu struc	**11456228**
black struc	**11456208**
white struc	**11456238**

INSTALLATION

12290230	GYPKIT 190X190 - Ø80

1X LED GU10 INCL. | GU10 | 5.4W

HALOGEN 12V

Lotis 86 IP55 MR16 GE



12V | IP55 | GWT 960° | 0.25KG

alu struc	**10883528**
black struc	**10883508**
white struc	**10883538**

INSTALLATION

12290230	GYPKIT 190X190 - Ø80

1X QR-CBC 51 | GX5.3 | MAX. 50W

HALOGEN 230V

Lotis 86 IP55 GU10



Friends of hue | 230V | * R | IP55 | GWT 960° | 0.25KG

alu struc	**10883628**
black struc	**10883608**
white struc	**10883638**

CONNECTED

70000613	PHILIPS HUE RGB GU10 BULB 6.5W
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

INSTALLATION

12290230	GYPKIT 190X190 - Ø80

1X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

ECO LED GE

Lotis 97 adjustable for LED GE



1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 50

Friends of hue | III | IP20 | GWT 960° | 0.20KG

alu	**13100005**
black	**13100002**
white struc	**13100009**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(M-LED 50 25°)

	350mA	**500mA**
2700K / 25°	506lm 6.2W	**651lm 9.2W**
3000K / 25°	536lm 6.2W	**721lm 9.2W**
3500K / 25°	562lm 6.2W	**755lm 9.2W**
4000K / 25°	559lm 6.2W	**752lm 9.2W**

DRIVER	SEE DRIVER MATRIX
M-LED	SEE BELOW

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889830	CONBOX 190X192X130X256
12290330	GYPKIT 190X190 - Ø92

HALOGEN 12V GE

Lotis 97 adjustable MR16 GE



1X QR-CBC 51 | GX5.3 | MAX. 50W

III | 12V | IP20 | GWT 960° | 0.40KG

alu	**10881205**
black	**10881202**
white struc	**10881209**

INSTALLATION	
12290330	GYPKIT 190X190 - Ø92

M-LED						SEE PAGES 138-141 FOR MORE INFO
14060005	M-LED 50 2700K 15° GE ALU	**14060505**	M-LED 50 3000K 40° GE ALU	**14061005**	M-LED 50 4000K 25° GE ALU
14060105	M-LED 50 2700K 25° GE ALU	**14060605**	M-LED 50 3500K 15° GE ALU	**14061105**	M-LED 50 4000K 40° GE ALU
14060205	M-LED 50 2700K 40° GE ALU	**14060705**	M-LED 50 3500K 25° GE ALU	**14061205**	M-LED 50 2000-3000K 15° GE ALU
14060305	M-LED 50 3000K 15° GE ALU	**14060805**	M-LED 50 3500K 40° GE ALU	**14061305**	M-LED 50 2000-3000K 25° GE ALU
14060405	M-LED 50 3000K 25° GE ALU	**14060905**	M-LED 50 4000K 15° GE ALU	**14061405**	M-LED 50 2000-3000K 40° GE ALU

Lotis

HALOGEN 230V

Lotis 97 adjustable GU10



1X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.40KG

alu	**10881305**
black	**10881302**
white struc	**10881309**

CONNECTED	
70000613	PHILIPS HUE RGB GU10 BULB 6.5W
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

INSTALLATION	
12290330	GYPKIT 190X190 - Ø92

ECO | LED | GE

Lotis 97 concrete adjustable for LED GE





1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 50

Friends of hue | III | IP20 | GWT 960° | 0.17KG

black	**13100102**
white struc	**13100109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(M-LED 50 25°)

	350mA	**500mA**
2700K / 25°	506lm 6.2W	**651lm 9.2W**
3000K / 25°	536lm 6.2W	**721lm 9.2W**
3500K / 25°	562lm 6.2W	**755lm 9.2W**
4000K / 25°	559lm 6.2W	**752lm 9.2W**

DRIVER	SEE DRIVER MATRIX
M-LED	SEE BELOW

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

HALOGEN 12V | GE

Lotis 97 concrete adjustable MR16 GE





1X QR-CBC 51 | GX5.3 | MAX. 50W

III | 12V | IP20 | GWT 960° | 0.18KG

black	**12570002**
white struc	**12570009**

M-LED						SEE PAGES 138-141 FOR MORE INFO
14060005	M-LED 50 2700K 15° GE ALU	**14060505**	M-LED 50 3000K 40° GE ALU	**14061005**	M-LED 50 4000K 25° GE ALU
14060105	M-LED 50 2700K 25° GE ALU	**14060605**	M-LED 50 3500K 15° GE ALU	**14061105**	M-LED 50 4000K 40° GE ALU
14060205	M-LED 50 2700K 40° GE ALU	**14060705**	M-LED 50 3500K 25° GE ALU	**14061205**	M-LED 50 2000-3000K 15° GE ALU
14060305	M-LED 50 3000K 15° GE ALU	**14060805**	M-LED 50 3500K 40° GE ALU	**14061305**	M-LED 50 2000-3000K 25° GE ALU
14060405	M-LED 50 3000K 25° GE ALU	**14060905**	M-LED 50 4000K 15° GE ALU	**14061405**	M-LED 50 2000-3000K 40° GE ALU

HALOGEN 230V

Lotis 97 concrete adjustable GU10



1X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.22KG

black	**12571002**
white struc	**12571009**

CONNECTED	
70000613	PHILIPS HUE RGB GU10 BULB 6.5W
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

HALOGEN 12V | GE

Lotis 230 AR111 GE





1X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111

III | 12V | IP20 | GWT 960° | 0.70KG

alu	**10880205**
black	**10880202**
white struc	**10880209**

M-LED	SEE BELOW

ECO | COMPACT FLUORESCENT | GI

Lotis 290 TC-D 26/32W





2X TC-TEL | GX24Q-3 | 26/32W

⏚ | 230V | IP20 | GWT 960° | 1.80KG

NOT DIMMABLE	
alu	**10881605**
black	**10881602**
white struc	**10881609**

M-LED						SEE PAGES 138-141 FOR MORE INFO	
11298002	M-LED 111 2700K 15° GE BLACK MATT	**11298302**	M-LED 111 3000K 15° GE BLACK MATT	**11298602**	M-LED 111 4000K 15° GE BLACK MATT
11298009	M-LED 111 2700K 15° GE WHITE STRUC	**11298309**	M-LED 111 3000K 15° GE WHITE STRUC	**11298609**	M-LED 111 4000K 15° GE WHITE STRUC
11298024	M-LED 111 2700K 15° GE BRUSHED ALU	**11298324**	M-LED 111 3000K 15° GE BRUSHED ALU	**11298624**	M-LED 111 4000K 15° GE BRUSHED ALU
11298102	M-LED 111 2700K 25° GE BLACK MATT	**11298402**	M-LED 111 3000K 25° GE BLACK MATT	**11298702**	M-LED 111 4000K 25° GE BLACK MATT
11298109	M-LED 111 2700K 25° GE WHITE STRUC	**11298409**	M-LED 111 3000K 25° GE WHITE STRUC	**11298709**	M-LED 111 4000K 25° GE WHITE STRUC
11298124	M-LED 111 2700K 25° GE BRUSHED ALU	**11298424**	M-LED 111 3000K 25° GE BRUSHED ALU	**11298724**	M-LED 111 4000K 25° GE BRUSHED ALU
11298202	M-LED 111 2700K 40° GE BLACK MATT	**11298502**	M-LED 111 3000K 40° GE BLACK MATT	**11298802**	M-LED 111 4000K 40° GE BLACK MATT
11298209	M-LED 111 2700K 40° GE WHITE STRUC	**11298509**	M-LED 111 3000K 40° GE WHITE STRUC	**11298809**	M-LED 111 4000K 40° GE WHITE STRUC
11298224	M-LED 111 2700K 40° GE BRUSHED ALU	**11298524**	M-LED 111 3000K 40° GE BRUSHED ALU	**11298824**	M-LED 111 4000K 40° GE BRUSHED ALU

Lotis

LOTIS 82

LOTIS 97 ADJUSTABLE

LOTIS 86 IP55

LOTIS
BISTRO VINTAGE, KONTICH (BE)

Asy lotis

ASY LOTIS 82

ASY LOTIS 97 ADJUSTABLE

ECO LED

Asy lotis 82 LED retrofit





230V | R,L | IP20 | GWT 960° | 0.25KG

1X LED GU10 INCL. 5.4W

LEADING EDGE DIMMABLE	2700K / CRI90
	25°
alu	**11450105**
black	**11450102**
white struc	**11450109**

INSTALLATION

10889830	CONBOX 190X192X130X256
12290830	GYPKIT 190X190 - Ø76

ECO LED GE

Asy lotis 82 for LED GE





Friends of hue | IP20 | GWT 960° | 0.13KG

1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 50

alu	**13080205**
black	**13080202**
white struc	**13080209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(M-LED 50 25°)

	350mA	**500mA**
2700K / 25°	432lm 6.2W	**555lm 9.2W**
3000K / 25°	457lm 6.2W	**614lm 9.2W**
3500K / 25°	475lm 6.2W	**639lm 9.2W**
4000K / 25°	491lm 6.2W	**659lm 9.2W**

DRIVER SEE DRIVER MATRIX

M-LED SEE BELOW

CONNECTED *WHEN CONNECTED TO 1-10V DRIVER

13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION

10889830	CONBOX 190X192X130X256
12290830	GYPKIT 190X190 - Ø76

OPTICAL

10213103	SOFTLENS Ø44

M-LED SEE PAGES 138-141 FOR MORE INFO

14060005	M-LED 50 2700K 15° GE ALU	**14060505**	M-LED 50 3000K 40° GE ALU	**14061005**	M-LED 50 4000K 25° GE ALU
14060105	M-LED 50 2700K 25° GE ALU	**14060605**	M-LED 50 3500K 15° GE ALU	**14061105**	M-LED 50 4000K 40° GE ALU
14060205	M-LED 50 2700K 40° GE ALU	**14060705**	M-LED 50 3500K 25° GE ALU	**14061205**	M-LED 50 2000-3000K 15° GE ALU
14060305	M-LED 50 3000K 15° GE ALU	**14060805**	M-LED 50 3500K 40° GE ALU	**14061305**	M-LED 50 2000-3000K 25° GE ALU
14060405	M-LED 50 3000K 25° GE ALU	**14060905**	M-LED 50 4000K 15° GE ALU	**14061405**	M-LED 50 2000-3000K 40° GE ALU

Asy lotis

HALOGEN 12V | GE

Asy lotis 82 MR16 GE





1X QR-CBC 51 | GX5.3 | 50W

12V | IP20 | GWT 960° | 0.15KG

alu	10880505
black	10880502
white struc	10880509

INSTALLATION

10889830	CONBOX 190X192X130X256
12290830	GYPKIT 190X190 - Ø76

HALOGEN 230V

Asy lotis 82 GU10





1X QPAR 16 | GU10 | 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.15KG

alu	10880605
black	10880602
white struc	10880609

CONNECTED

70000613	PHILIPS HUE RGB GU10 BULB 6.5W
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

INSTALLATION

10889830	CONBOX 190X192X130X256
12290830	GYPKIT 190X190 - Ø76

OPTICAL

10211903	SPREADLENS Ø50
10213003	SOFTLENS Ø50

ECO | LED | GE

Asy lotis 97 adjustable for LED GE





1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 50

Friends of hue | IP20 | GWT 960° | 0.26KG

alu	13100205
black	13100202
white struc	13100209

LUMINAIRE OUTPUT & POWER CONSUMPTION
(M-LED 50 25°)

	350mA	500mA
2700K / 25°	459lm 6.2W	**590lm 9.2W**
3000K / 25°	487lm 6.2W	**654lm 9.2W**
3500K / 25°	505lm 6.2W	**679lm 9.2W**
4000K / 25°	524lm 6.2W	**703lm 9.2W**

DRIVER — SEE DRIVER MATRIX

M-LED — SEE RIGHT PAGE

CONNECTED — *WHEN CONNECTED TO 1-10V DRIVER

13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION

12290330	GYPKIT 190X190 - Ø92

OPTICAL

10213103	SOFTLENS Ø44

HALOGEN 12V | GE

Asy lotis 97 adjustable MR16 GE





1X QR-CBC 51 | GX5.3 | 50W

12V | IP20 | GWT 960° | 0.21KG

alu	**10881405**
black	**10881402**
white struc	**10881409**

INSTALLATION

12290330	GYPKIT 190X190 - Ø92

HALOGEN 230V

Asy lotis 97 adjustable GU10



1X QPAR 16 | GU10 | 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.21KG

alu	**10881505**
black	**10881502**
white struc	**10881509**

CONNECTED

70000613	PHILIPS HUE RGB GU10 BULB 6.5W
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

INSTALLATION

12290330	GYPKIT 190X190 - Ø92

OPTICAL

10211903	SPREADLENS Ø50
10213003	SOFTLENS Ø50

M-LED SEE PAGES 138-141 FOR MORE INFO

14060005	M-LED 50 2700K 15° GE ALU	**14060505**	M-LED 50 3000K 40° GE ALU	**14061005**	M-LED 50 4000K 25° GE ALU
14060105	M-LED 50 2700K 25° GE ALU	**14060605**	M-LED 50 3500K 15° GE ALU	**14061105**	M-LED 50 4000K 40° GE ALU
14060205	M-LED 50 2700K 40° GE ALU	**14060705**	M-LED 50 3500K 25° GE ALU	**14061205**	M-LED 50 2000-3000K 15° GE ALU
14060305	M-LED 50 3000K 15° GE ALU	**14060805**	M-LED 50 3500K 40° GE ALU	**14061305**	M-LED 50 2000-3000K 25° GE ALU
14060405	M-LED 50 3000K 25° GE ALU	**14060905**	M-LED 50 4000K 15° GE ALU	**14061405**	M-LED 50 2000-3000K 40° GE ALU

Lotis

LOTIS 82
WIJNHANDEL VANMAELE, BRUGGE (BE)

LOTIS 82
HET RIJK VAN NIJMEGEN, NIJMEGEN (NL)
ZENBER INTERIEUR ARCHITECTUUR BNI

LOTIS 82
HET RIJK VAN NIJMEGEN, NIJMEGEN (NL)
ZENBER INTERIEUR ARCHITECTUUR BNI

Lotis square

Lotis square is a compact, square version of our successful round Lotis series. The bulb sits deep down in a conical cup, which means it is less visible. Besides the regular version, there is also an IP version for use in damp rooms or outdoor environments. Available with a white or black structure. Lotis square is now also available in an upgraded Lotis square for LED version, using our M-LED 50 module. This allows you to choose from a large range of lighting colours (2700-4000K) and three different beam angles (spot, medium or flood).

SUPERMODULAR.COM/EN/LOTIS-SQUARE

ECO LED GE

Lotis square for LED GE





1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 50

black	**12619002**
white struc	**12619009**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(M-LED 50 25°)

	350mA	**500mA**
2700K / 25°	442lm 6.2W	**568lm 9.2W**
3000K / 25°	469lm 6.2W	**630lm 9.2W**
3500K / 25°	487lm 6.2W	**655lm 9.2W**
4000K / 25°	510lm 6.2W	**685lm 9.2W**

DRIVER	SEE DRIVER MATRIX
M-LED	SEE BELOW

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889830	CONBOX 190X192X130X256
12291130	GYPKIT 190X190X78X78

ECO LED GE

Lotis square IP55 for LED GE





1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 50

black struc	**12619108**
white struc	**12619109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(M-LED 50 25°)

	350mA	**500mA**
2700K / 25°	460lm 6.2W	**591lm 9.2W**
3000K / 25°	487lm 6.2W	**655lm 9.2W**
3500K / 25°	506lm 6.2W	**681lm 9.2W**
4000K / 25°	533lm 6.2W	**715lm 9.2W**

DRIVER	SEE DRIVER MATRIX
M-LED	SEE BELOW

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889830	CONBOX 190X192X130X256
12291230	GYPKIT 190X190X84X84

M-LED						SEE PAGES 138-141 FOR MORE INFO
14060005	M-LED 50 2700K 15° GE ALU	**14060505**	M-LED 50 3000K 40° GE ALU	**14061005**	M-LED 50 4000K 25° GE ALU
14060105	M-LED 50 2700K 25° GE ALU	**14060605**	M-LED 50 3500K 15° GE ALU	**14061105**	M-LED 50 4000K 40° GE ALU
14060205	M-LED 50 2700K 40° GE ALU	**14060705**	M-LED 50 3500K 25° GE ALU	**14061205**	M-LED 50 2000-3000K 15° GE ALU
14060305	M-LED 50 3000K 15° GE ALU	**14060805**	M-LED 50 3500K 40° GE ALU	**14061305**	M-LED 50 2000-3000K 25° GE ALU
14060405	M-LED 50 3000K 25° GE ALU	**14060905**	M-LED 50 4000K 15° GE ALU	**14061405**	M-LED 50 2000-3000K 40° GE ALU

Lotis square

HALOGEN 12V | GE

Lotis square MR16 GE





1X QR-CBC 51 | GU 5.3 | MAX. 50W

III | 12V | IP20 | GWT 960° | 0.23KG

black	**12611002**
white struc	**12611009**

INSTALLATION	
10889830	CONBOX 190X192X130X256
12291130	GYPKIT 190X190X78X78

HALOGEN 230V

Lotis square GU10





1X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.27KG

black	**12610002**
white struc	**12610009**

CONNECTED	
70000613	PHILIPS HUE RGB GU10 BULB 6.5W
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889830	CONBOX 190X192X130X256
12291130	GYPKIT 190X190X78X78

HALOGEN 12V | GE

Lotis square IP55 MR16 GE





1X QR-C 51 | GX5.3 | MAX. 50W

III | 12V | IP55 | GWT 960° | 0.24KG

black struc	**12615008**
white struc	**12615009**

INSTALLATION	
10889830	CONBOX 190X192X130X256
12291230	GYPKIT 190X190X84X84

HALOGEN 230V

Lotis square IP55 GU10





1X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

black struc	**12614008**
white struc	**12614009**

CONNECTED	
70000613	PHILIPS HUE RGB GU10 BULB 6.5W
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889830	CONBOX 190X192X130X256
12291230	GYPKIT 190X190X84X84

Lotis square

LOTIS SQUARE
PRIVATE RESIDENCE, ROTTERDAM (NL)
ERIC KANT

PRIVATE RESIDENCE, KONTICH (BE)

see also:

p. 410

p. 506

Lotis tubed

Lotis tubed is the surface-mounted version of the standard Lotis recessed spot. The coloured cylinder houses the Lotis spot. Lotis tubed is available in different heights - from 130 mm to 190 mm. The largest size also comes in a suspension version. Combining both versions creates depth in your rooms and spices up your interior. Lotis tubed allows you to play with colours: go for contrasting black, white and gold finishes, or choose a more uniform look instead.

SUPERMODULAR.COM/EN/LOTIS-TUBED

ECO LED

Lotis tubed surface LED retrofit



1X LED GU10 INCL. 5.4W

230V | R,L | IP20 | GWT 960° | 0.36KG

LEADING EDGE DIMMABLE	2700K / CRI90
	25°
black struc (gold interior)	**11450232**
black struc (white struc interior)	**11450237**
white struc (black interior)	**11450229**
white struc (gold interior)	**11450289**
white struc (white struc interior)	**11450209**

HALOGEN 12V GE

Lotis tubed surface MR16 GE



1X QR-CBC 51 GU 5.3 MAX. 50W

12V | IP20 | GWT 960° | 0.36KG

black struc (gold interior)	**10882932**
black struc (white struc interior)	**10882937**
white struc (black interior)	**10882929**
white struc (gold interior)	**10882989**
white struc (white struc interior)	**10882909**

HALOGEN 230V

Lotis tubed surface GU10





1X QPAR 16 GU10 MAX. 35W

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.36KG

black struc (gold interior)	**10883032**
black struc (white struc interior)	**10883037**
white struc (black interior)	**10883029**
white struc (gold interior)	**10883089**
white struc (white struc interior)	**10883009**

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED	
70000613	PHILIPS HUE RGB GU10 BULB 6.5W
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

Lotis tubed

ECO LED

Lotis tubed suspension LED retrofit



LEADING EDGE DIMMABLE	2700K / CRI90
	25°
black struc (gold interior)	**11458332**
black struc (white struc interior)	**11458337**
white struc (black interior)	**11458329**
white struc (gold interior)	**11458389**
white struc (white struc interior)	**11458309**

1X LED GU10 INCL. | GU10 | 5.4W

HALOGEN 230V

Lotis tubed suspension GU10



black struc (gold interior)	**10883132**
black struc (white struc interior)	**10883137**
white struc (black interior)	**10883129**
white struc (gold interior)	**10883189**
white struc (white struc interior)	**10883109**

1X QPAR 16 | GU10 | MAX. 35W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED	
70000613	PHILIPS HUE RGB GU10 BULB 6.5W
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

HALOGEN 12V | GE

Lotis tubed recessed MR16 GE



black struc (gold interior)	**10883432**
black struc (white struc interior)	**10883437**
white struc (black interior)	**10883429**
white struc (gold interior)	**10883489**
white struc (white struc interior)	**10883409**

1X QR-CBC 51 | GU 5.3 | MAX. 50W

LOTIS TUBED
HET RIJK VAN NIJMEGEN, NIJMEGEN (NL)
ZENBER INTERIEUR ARCHITECTUUR BNI

Lotis tubed

LOTIS TUBED
WATCHES OF SWITZERLAND, LUZERN (CH)
MÜLLER ARCHITEKTEN

LOTIS TUBED, SMART LOTIS
HERZPRAXIS HÖNGG, ZURICH (CH)
DOST INNENARCHITEKTUR

Lotis tubed

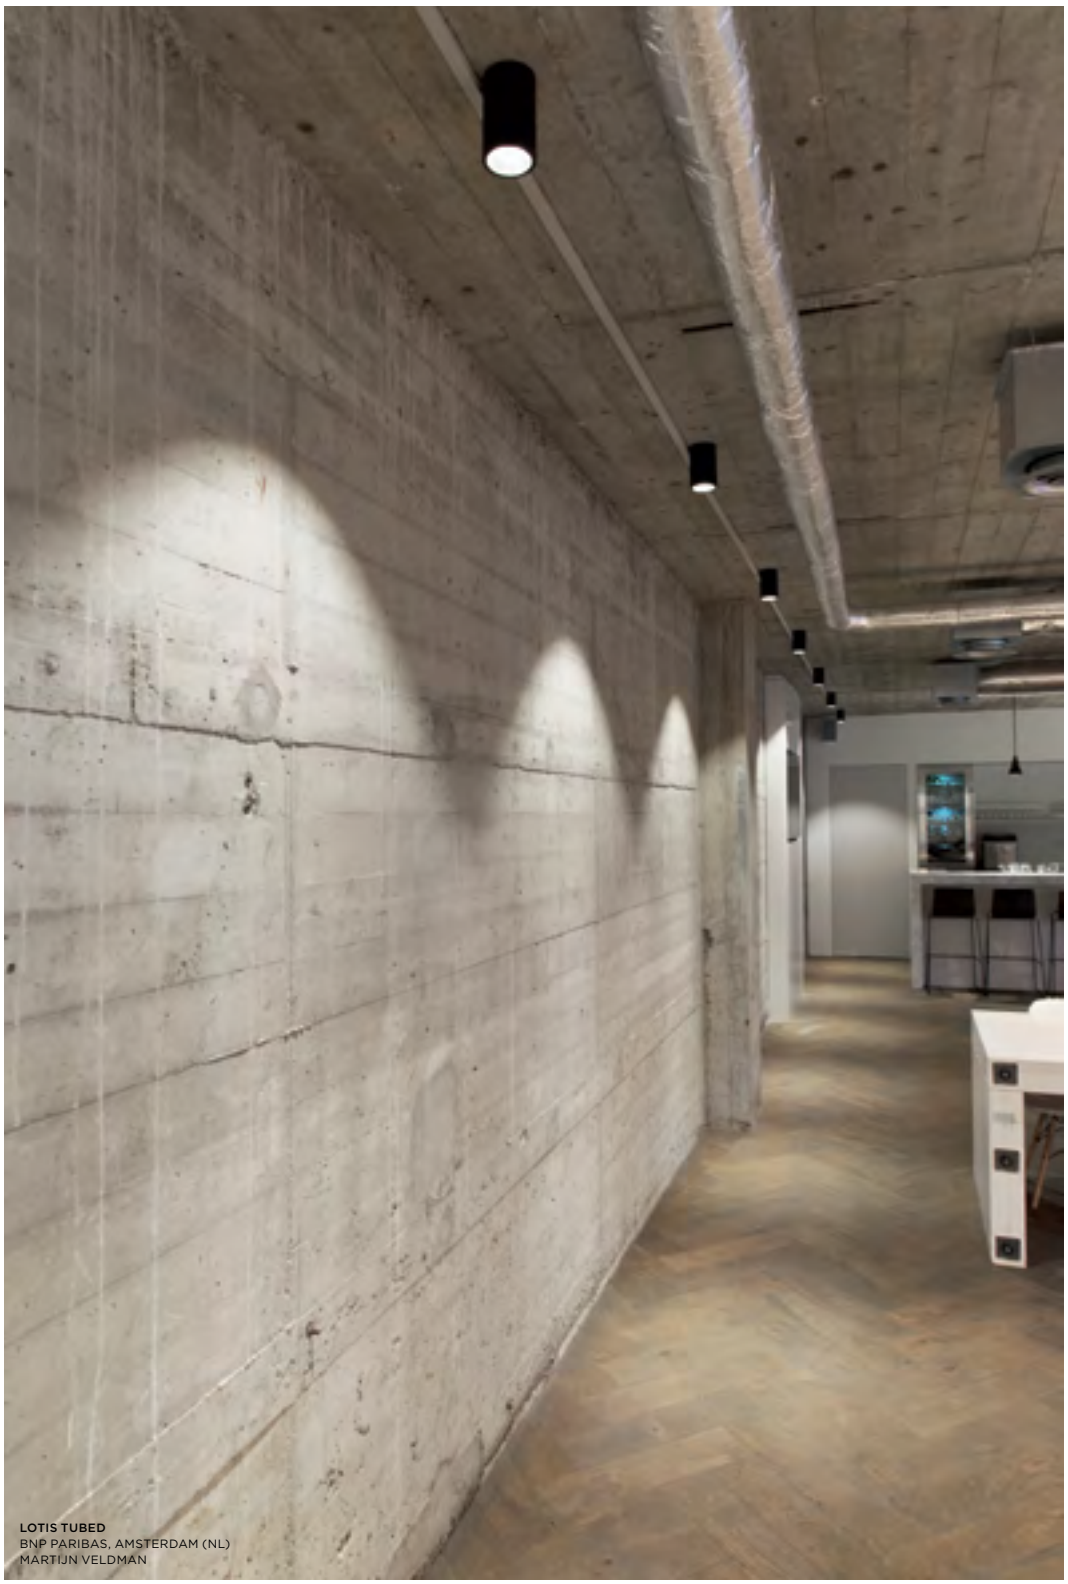

LOTIS TUBED
BNP PARIBAS, AMSTERDAM (NL)
MARTIJN VELDMAN

LOTIS TUBED
PRIVATE RESIDENCE, OUDEKERK (NL)
HEYLIGERS DESIGN + PROJECT

LOTIS TUBED
SPARKASSEN VERSICHERUNG, STUTTGART (DE)
BERND KIRCHBRÜCHER, RAUMLINQ GMBH

M-LED

After introducing the M-LED 111 and M-LED 70 modules,
Modular has again prepared some icons to be LED-ified.
Replacing the well-known MR16 lamp, the M-LED 50 module
is designed for Lotis for LED, Asy lotis for LED and Lotis square for LED.

M-LED 111 is your solution for the Haloscan for LED and Multiple (trimless)
for LED series, while M-LED 70 seamlessly fits your Mini multiple (trimless) for LED.

SUPERMODULAR.COM/EN/M-LED

ECO LED GE

M-LED 111 GE



1X LED ARRAY INCL. 16.25W

! CAN BE COMBINED WITH BOLSTER RECESSED, HALOSCAN 179, LOTIS AND MULTIPLE (TRIMLESS)

Friends of hue | III | 500mA | IP20 | GWT 960° | 0.75KG

	2700K			3000K			4000K		
	15°	25°	40°	15°	25°	40°	15°	25°	40°
black matt	11298002	11298102	11298202	11298302	11298402	11298502	11298602	11298702	11298802
brushed alu	11298024	11298124	11298224	11298324	11298424	11298524	11298624	11298724	11298824
white struc	11298009	11298109	11298209	11298309	11298409	11298509	11298609	11298709	11298809

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	**500mA**	700mA	900mA
2700K / 25°	920lm 11W	**1256lm 16.25W**	1625lm 23.6W	1907lm 31.2W
3000K / 25°	904lm 11W	**1233lm 16.25W**	1596lm 23.6W	1874lm 31.2W
4000K / 25°	1053lm 11W	**1437lm 16.25W**	1860lm 23.6W	2187lm 31.2W

DRIVER	SEE DRIVER MATRIX
CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

ECO LED GE

M-LED 70 GE



1X LED ARRAY INCL. 9.2W

! CAN BE COMBINED WITH MINI MULTIPLE (TRIMLESS)
! 3500K ON REQUEST

Friends of hue | III | 500mA | IP20 | GWT 960° | 0.18KG

	2700K / CRI90+			3000K / CRI90+			4000K / CRI90+		
	15°	25°	40°	15°	25°	40°	15°	25°	40°
black	14070002	14070102	14070202	14070302	14070402	14070502	14070602	14070702	14070802
white struc	14070009	14070109	14070209	14070309	14070409	14070509	14070609	14070709	14070809

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	**500mA**
2700K / 25°	571lm 6.2W	**734lm 9.2W**
3000K / 25°	605lm 6.2W	**813lm 9.2W**
4000K / 25°	649lm 6.2W	**871lm 9.2W**

DRIVER	SEE DRIVER MATRIX
CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

ECO LED GE

M-LED 70 **warm dim** GE



1X LED ARRAY INCL. 7W

! CAN BE COMBINED WITH MINI MULTIPLE (TRIMLESS)

Friends of hue | III | 350mA | IP20 | GWT 960° | 0.18KG

	2000-3000K / CRI90+		
	15°	25°	40°
black	14070902	14071002	14071102
white struc	14070909	14071009	14071109

DRIVER	SEE DRIVER MATRIX
CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

M-LED

ECO LED GE

M-LED 50 GE



1X LED ARRAY INCL. 9.2W

! CAN BE COMBINED WITH LOTIS, ASY LOTIS AND LOTIS SQUARE

500mA IP20 0.14KG

	2700K			3000K			3500K			4000K		
	15°	25°	40°	15°	25°	40°	15°	25°	40°	15°	25°	40°
alu	14060005	14060105	14060205	14060305	14060405	14060505	14060605	14060705	14060805	14060905	14061005	14061105

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° alu)

	350mA	**500mA**
2700K / 25°	571lm 6.2W	**734lm 9.2W**
3000K / 25°	605lm 6.2W	**813lm 9.2W**
3500K / 25°	632lm 6.2W	**843lm 9.2W**
4000K / 25°	649lm 6.2W	**871lm 9.2W**

DRIVER	SEE DRIVER MATRIX

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

ECO LED GE

M-LED 50 **warm dim** GE



1X LED ARRAY INCL. 7W

! CAN BE COMBINED WITH LOTIS, ASY LOTIS AND LOTIS SQUARE

350mA IP20 0.14KG

	2000-3000K / CRI90+		
	15°	25°	40°
alu	**14061205**	**14061305**	**14061405**

DRIVER	SEE DRIVER MATRIX

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

M-LED 50

M-LED 111

Marbul

Marbul feels at home on both the wall and ceiling, which makes it ideal for both residential and hospitality projects. With fully integrated technology, it's a perfect ready-made solution for renovation projects as well. Marbul presents an ingenious design, where the body holds one or two globes, each with its own dedicated LED module.

ASYMMETRY RULES

The soft curves of its asymmetric globes, a characteristic Modular detail, give Marbul a futuristic spin. Each globe tilts independently, without any visible wiring. At the same time, the globe shape and design serve as a heat conductor while reflecting the light with maximum efficiency.

AN EYE FOR DETAILS

Modular always strives for perfection and by pushing our boundaries daily, we succeed in bringing you a surprisingly detailed fixture. This time, securing the reflector into the globe was approached from a different angle. Instead of fitting the reflector with a front ring, we chose to fix it firmly from the back of the globe, resulting in a reflector that sits perfectly within the globe's rim.

EASY INSTALLATION

Designed to look as light and elegant as possible, the housing and base give the impression that the globes are floating below the ceiling or against the wall. Ease of installation was also a major consideration in our design of the housing.It features pre-moulded holes to facilitate securing it with screws to the ceiling, as well as a cover fitted with magnets and a safety wire. All in all, it will take only four steps to get Marbul started.

SUPERMODULAR.COM/EN/MARBUL

ECO LED GI

Marbul 1x LED GI



1X LED ARRAY INCL. 9.3W

! 3500K AND 4000K ON REQUEST

Friends of hue | 230V | IP20 | GWT 960° | 1.39KG

LEADING/TRAILING EDGE DIMMABLE	2700K / CRI90+			3000K / CRI90+		
	10°	25°	40°	10°	25°	40°
black struc	13050132	13050232	13050332	13052132	13052232	13052332
donkey grey struc	13050176	13050276	13050376	13052176	13052276	13052376
white struc	13050109	13050209	13050309	13052109	13052209	13052309

DALI	2700K / CRI90+			3000K / CRI90+		
	10°	25°	40°	10°	25°	40°
black struc	13051532	13051632	13051732	13053532	13053632	13053732
donkey grey struc	13051576	13051676	13051776	13053576	13053676	13053776
white struc	13051509	13051609	13051709	13053509	13053609	13053709

1-10V*/PUSHDIM	2700K / CRI90+			3000K / CRI90+		
	10°	25°	40°	10°	25°	40°
black struc	13051132	13051232	13051332	13053132	13053232	13053332
donkey grey struc	13051176	13051276	13051376	13053176	13053276	13053376
white struc	13051109	13051209	13051309	13053109	13053209	13053309

LUMINAIRE OUTPUT & POWER CONSUMPTION

(25° white struc - values per lamp module)

2700K / 25°	**715lm 12W**
3000K / 25°	**748lm 12W**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

Marbul

ECO LED GI

Marbul 2x LED GI



2X LED ARRAY INCL. 9.3W

! 3500K AND 4000K ON REQUEST

LEADING/TRAILING EDGE DIMMABLE	2700K / CRI90+			3000K / CRI90+		
	10°	25°	40°	10°	25°	40°
black struc	13054132	13054232	13054332	13056132	13056232	13056332
donkey grey struc	13054176	13054276	13054376	13056176	13056276	13056376
white struc	13054109	13054209	13054309	13056109	13056209	13056309

DALI	2700K / CRI90+			3000K / CRI90+		
	10°	25°	40°	10°	25°	40°
black struc	13055532	13055632	13055732	13057532	13057632	13057732
donkey grey struc	13055576	13055676	13055776	13057576	13057676	13057776
white struc	13055509	13055609	13055709	13057509	13057609	13057709

1-10V*/PUSHDIM	2700K / CRI90+			3000K / CRI90+		
	10°	25°	40°	10°	25°	40°
black struc	13055132	13055232	13055332	13057132	13057232	13057332
donkey grey struc	13055176	13055276	13055376	13057176	13057276	13057376
white struc	13055109	13055209	13055309	13057109	13057209	13057309

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc - values per lamp module)

2700K / 25°	**715lm 12W**
3000K / 25°	**748lm 12W**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

MARBUL 1X

MARBUL 2X

Marbul

MARBUL
PRIVATE RESIDENCE, KAIN (BE)

PRIVATE RESIDENCE, KAIN (BE)

MARBUL
RESTAURANT LA MAISON DES TÊTES, COLMAR (FR)
F+F ARCHITECTES

Marcel

Marcel meets every customer's requirements for a highly efficient retail lighting solution. Its ease-of-installation, adjustability and the endless possibilities procured by different LED sources and different lamp versions (one, two or three lamps) make Marcel an extremely versatile fixture.

FOCUS ON THE ESSENTIALS

Marcel presents a stylish frame, fitted with adjustable lamp units. In the single lamp version, the frame is square shaped, while the two and three lamp versions have a rectangular shape. The refined, directional downlight will be used mainly in retail applications, as a functional lighting solution. It's perfect for situations that require both high efficiency and low consumption.

PLUG-AND-PLAY INSTALLATION

The installation of Marcel, is just as quick and easy as changing its lighting effect (by interchangeable reflectors or add-on antiglare, spreadlens, ...), thanks to our smart installation system. By simply tightening two screws, the installation flanges fold out and secure the fixture to the ceiling.

ONLY ONE LIGHT PUSH

The right lighting mood is of the utmost importance in a shop. Marcel makes it easy to change the lighting effect to suit the circumstances and setting in your retail space. The brackets and unique tilt mechanism allow you to direct the light source the way you want, and you won't need a ladder: the tip of a broomstick will do the trick! Just touch the border of the lamp's housing and redirect the lamp as desired in one single action.

SUPERMODULAR.COM/EN/MARCEL

ECO LED GE

Marcel 1x LED GE



1X LED ARRAY INCL. 31W

! 3500K AND 4000K ON REQUEST

Friends of hue | III | 700mA | IP20 | GWT 960° | 1.21KG

	2700K / CRI90+			3000K / CRI90+		
	15°	25°	40°	15°	25°	40°
black struc	**14091032**	**14091132**	**14091232**	**14091332**	**14091432**	**14091532**
white struc	**14091009**	**14091109**	**14091209**	**14091309**	**14091409**	**14091509**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc - values per lamp module)

	350mA	500mA	**700mA**
2700K / 25°	1340lm 11.7W	1805lm 17.2W	**2381lm 25W**
3000K / 25°	1388lm 11.7W	1869lm 17.2W	**2466lm 25W**

DRIVER	SEE DRIVER MATRIX
CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

OPTICAL	
10212700	TRANSPARANT GLASS Ø79
10212703	SPREADLENS Ø79
10212702	HONEYCOMB Ø79
11949730	REFLECTOR LED Ø80 FLOOD
11949830	REFLECTOR LED Ø80 MEDIUM
11949930	REFLECTOR LED Ø80 SPOT

ECO LED GE

Marcel 2x LED GE





2X LED ARRAY INCL. 31W

! 3500K AND 4000K ON REQUEST

Friends of hue | III | 700mA | IP20 | GWT 960° | 2.12KG

	2700K / CRI90+			3000K / CRI90+		
	15°	25°	40°	15°	25°	40°
black struc	**14092032**	**14092132**	**14092232**	**14092332**	**14092432**	**14092532**
white struc	**14092009**	**14092109**	**14092209**	**14092309**	**14092409**	**14092509**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc - values per lamp module)

	350mA	500mA	**700mA**
2700K / 25°	1340lm 11.7W	1805lm 17.2W	**2381lm 25W**
3000K / 25°	1388lm 11.7W	1869lm 17.2W	**2466lm 25W**

DRIVER	SEE DRIVER MATRIX
CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

OPTICAL	
10212700	TRANSPARANT GLASS Ø79
10212703	SPREADLENS Ø79
10212702	HONEYCOMB Ø79
11949730	REFLECTOR LED Ø80 FLOOD
11949830	REFLECTOR LED Ø80 MEDIUM
11949930	REFLECTOR LED Ø80 SPOT

Marcel

ECO LED GE

Marcel 3x LED GE



3X LED ARRAY INCL. 31W

! 3500K AND 4000K ON REQUEST

700mA IP20 GWT 960° 3.17KG

	2700K / CRI90+			3000K / CRI90+		
	15°	25°	40°	15°	25°	40°
black struc	**14093032**	**14093132**	**14093232**	**14093332**	**14093432**	**14093532**
white struc	**14093009**	**14093109**	**14093209**	**14093309**	**14093409**	**14093509**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc - values per lamp module)

	350mA	500mA	**700mA**
2700K / 25°	1340lm 11.7W	1805lm 17.2W	**2381lm 25W**
3000K / 25°	1388lm 11.7W	1869lm 17.2W	**2466lm 25W**

DRIVER	SEE DRIVER MATRIX

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

OPTICAL	
10212700	TRANSPARANT GLASS Ø79
10212703	SPREADLENS Ø79
10212702	HONEYCOMB Ø79
11949730	REFLECTOR LED Ø80 FLOOD
11949830	REFLECTOR LED Ø80 MEDIUM
11949930	REFLECTOR LED Ø80 SPOT

Marcel

MARCEL 1X

MARCEL 3X

Marcel

MARCEL
AXALTA, LUMMEN (BE)

SVILLA B&B, TURNHOUT (BE)

Marcel

TA-ZE SHOP, GENT (BE)

BROOKLYN, KORTRIJK (BE)

MARCEL
FEMEX FOR IMPORT - LE COLLEZIONI MULTIBRAND, ALEXANDRIA (EGYPT)
BOND

Médard

Nature is always the best inspiration for great designs. The insect stick inspired the Dutch design agency Bleijh to imagine and create Médard. Its quirky nature fits the Modular DNA. Médard is highly versatile thanks to its orientable head. The track-mounted and ceiling-mounted versions are a perfect example of the range of architectural lighting in Modular's portfolio. Médard is LED dedicated and powerful enough to accentuate objects in the room. Also great company to have next to your bed or on your desk.

design in cooperation with bleijh

SUPERMODULAR.COM/EN/MEDARD

NEW ECO LED GE

Médard ceiling recessed LED GE



1X LED ARRAY INCL. 16.2W

	2700K / CRI90+		3000K / CRI90+	
	24°	40°	24°	40°
black struc	12736032	12736132	12736232	12736332
white struc	12736009	12736109	12736209	12736309

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	500mA
2700K / 25°	936lm 16.2W	**1285lm 16.2W**
3000K / 25°	920lm 16.2W	**1261lm 16.2W**

DRIVER	SEE DRIVER MATRIX

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10490330	CONBOX 112X172X100X236
12291330	GYPKIT 170X112 - Ø65

ECO LED GI

Médard ceiling LED GI



1X LED ARRAY INCL. 11W

NOT DIMMABLE	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	12732532	12732732	12734032	12734232
white struc	12732509	12732709	12734009	12734209

LEADING/TRAILING EDGE DIMMABLE	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	12732632	12732832	12734132	12734332
white struc	12732609	12732809	12734109	12734309

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

2700K / 25°	**936lm 13W**
3000K / 25°	**920lm 13W**

Médard

ECO LED GI

Médard track LED GI



1X LED ARRAY INCL. 11W

230V IP20 GWT 960° 0.96KG

NOT DIMMABLE	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	**12733532**	**12733732**	**12735032**	**12735232**
white struc	**12733509**	**12733709**	**12735009**	**12735209**

LEADING/TRAILING EDGE DIMMABLE	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	**12733632**	**12733832**	**12735132**	**12735332**
white struc	**12733609**	**12733809**	**12735109**	**12735309**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

2700K / 25°	**936lm 13W**
3000K / 25°	**920lm 13W**

TRACK SEE BELOW

ECO LED

Médard LED retrofit



1X LED GU10 INCL. 5.4W

230V IP20 GWT 960° 2.75KG

NOT DIMMABLE	2700K / CRI90
	25°
black struc	**12730032**
white struc	**12730009**

! CABLE (5M) INCLUDED
! ON/OFF SWITCH INCLUDED

TRACK FOR ADDITIONAL TRACK COMPONENTS SEE GOODIES

11240101	TRACK PROFILE SURFACE 2M SHINY WHITE	**11240601**	TRACK POWER FEED SURFACE LEFT SHINY WHITE	**11241701**	TRACK POWER FEED RECESSED LEFT SHINY WHITE
11240102	TRACK PROFILE SURFACE 2M BLACK	**11240602**	TRACK POWER FEED SURFACE LEFT BLACK	**11241702**	TRACK POWER FEED RECESSED LEFT BLACK
11240105	TRACK PROFILE SURFACE 2M ALU	**11240605**	TRACK POWER FEED SURFACE LEFT ALU	**11241705**	TRACK POWER FEED RECESSED LEFT ALU
11240301	TRACK PROFILE RECESSED 2M SHINY WHITE	**11241401**	TRACK COVER ENDPLATE SHINY WHITE	**11242201**	TRACK PROFILE SURFACE 1M SHINY WHITE
11240302	TRACK PROFILE RECESSED 2M BLACK	**11241402**	TRACK COVER ENDPLATE BLACK	**11242202**	TRACK PROFILE SURFACE 1M BLACK
11240305	TRACK PROFILE RECESSED 2M ALU	**11241405**	TRACK COVER ENDPLATE ALU	**11242205**	TRACK PROFILE SURFACE 1M ALU
11240501	TRACK POWER FEED SURFACE RIGHT SHINY WHITE	**11241601**	TRACK POWER FEED RECESSED RIGHT SHINY WHITE	**11242401**	TRACK PROFILE RECESSED 1M SHINY WHITE
11240502	TRACK POWER FEED SURFACE RIGHT BLACK	**11241602**	TRACK POWER FEED RECESSED RIGHT BLACK	**11242402**	TRACK PROFILE RECESSED 1M BLACK
11240505	TRACK POWER FEED SURFACE RIGHT ALU	**11241605**	TRACK POWER FEED RECESSED RIGHT ALU	**11242405**	TRACK PROFILE RECESSED 1M ALU

MEDARD
ARCHITECTENBUREAU ARJAAN DE FEYTER

Médard

MEDARD
PROJECTATELIER, KASTERLEE (BE)

MEDARD
CHRISTIAN WIJNANTS FLAGSHIP STORE, ANTWERPEN (BE)

Médard

PRIVATE RESIDENCE, AMSTERDAM (NL)

RESTAURANT TRIBECA, HEEZE (NL)
SERVIE BOETSKES

Médard

MEDARD
HOTEL V FIZEAUSTRAAT, AMSTERDAM (NL)
MIRJAM ESPINOSA

MEDARD
HOTEL V FIZEAUSTRAAT, AMSTERDAM (NL)
MIRJAM ESPINOSA

Multiple / Mini multiple

Twenty years after its initial launch, Modular's Multiple is still a much coveted luminaire series and the flagship solution in our architectural lighting portfolio. The technology is on full display and allows all Multiple luminaires to fit well into both a minimalist and an industrial-chic environment. The light source can be directed in any desired angle thanks to the gimbaled system.

The Multiple family consists of four models, with slight differences as to size and finish. All four models are now available for LED, by combining the Multiple (trimless) and Mini multiple (trimless) with our M-LED 111 and M-LED 70 modules. The LED series offers you an extensive range of lighting coloures and three different beam angles.

Connect Mini multiple (trimless) with Smart by adding the frontrings to your recessed spot.

SUPERMODULAR.COM/EN/MINI-MULTIPLE
SUPERMODULAR.COM/EN/MULTIPLE

ECO LED GE

Mini multiple for 1x LED GE



1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 70

alu - black	**13130005**
white struc	**13130009**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(M-LED 70 25° white struc - values per lamp module)

	350mA	**500mA**
2700K / 25°	571lm 6.2W	**734lm 9.2W**
3000K / 25°	605lm 6.2W	**813lm 9.2W**
4000K / 25°	649lm 6.2W	**871lm 9.2W**

DRIVER	SEE DRIVER MATRIX
M-LED	SEE BELOW

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10400130	CONBOX 122X257X147X186
10420130	GYPKIT 255X152X110X110

ECO LED GE

Mini multiple for 2x LED GE



2X LED (NOT INCL.)

! MUST BE USED WITH M-LED 70

alu - black	**13130105**
white struc	**13130109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(M-LED 70 25° white struc - values per lamp module)

	350mA	**500mA**
2700K / 25°	571lm 6.2W	**734lm 9.2W**
3000K / 25°	605lm 6.2W	**813lm 9.2W**
4000K / 25°	649lm 6.2W	**871lm 9.2W**

DRIVER	SEE DRIVER MATRIX
M-LED	SEE BELOW

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10400230	CONBOX 257X222X147X321
10420230	GYPKIT 240X287X210X110

M-LED						SEE PAGES 138-141 FOR MORE INFO
14070002	M-LED 70 2700K 15° GE BLACK MATT	**14070402**	M-LED 70 3000K 25° GE BLACK MATT	**14070802**	M-LED 70 4000K 40° GE BLACK MATT
14070009	M-LED 70 2700K 15° GE WHITE STRUC	**14070409**	M-LED 70 3000K 25° GE WHITE STRUC	**14070809**	M-LED 70 4000K 40° GE WHITE STRUC
14070102	M-LED 70 2700K 25° GE BLACK MATT	**14070502**	M-LED 70 3000K 40° GE BLACK MATT	**14070902**	M-LED 70 2000-3000K 15° GE BLACK MATT
14070109	M-LED 70 2700K 25° GE WHITE STRUC	**14070509**	M-LED 70 3000K 40° GE WHITE STRUC	**14070909**	M-LED 70 2000-3000K 15° GE WHITE STRUC
14070202	M-LED 70 2700K 40° GE BLACK MATT	**14070602**	M-LED 70 4000K 15° GE BLACK MATT	**14071002**	M-LED 70 2000-3000K 25° GE BLACK MATT
14070209	M-LED 70 2700K 40° GE WHITE STRUC	**14070609**	M-LED 70 4000K 15° GE WHITE STRUC	**14071009**	M-LED 70 2000-3000K 25° GE WHITE STRUC
14070302	M-LED 70 3000K 15° GE BLACK MATT	**14070702**	M-LED 70 4000K 25° GE BLACK MATT	**14071102**	M-LED 70 2000-3000K 40° GE BLACK MATT
14070309	M-LED 70 3000K 15° GE WHITE STRUC	**14070709**	M-LED 70 4000K 25° GE WHITE STRUC	**14071109**	M-LED 70 2000-3000K 40° GE WHITE STRUC

Mini multiple

ECO LED GE

Mini multiple for 3x LED GE



3X LED (NOT INCL.)

! MUST BE USED WITH M-LED 70

alu - black	**13130205**
white struc	**13130209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(M-LED 70 25° white struc - values per lamp module)

	350mA	**500mA**
2700K / 25°	571lm 6.2W	**734lm 9.2W**
3000K / 25°	605lm 6.2W	**813lm 9.2W**
4000K / 25°	649lm 6.2W	**871lm 9.2W**

DRIVER	SEE DRIVER MATRIX
M-LED	SEE BELOW

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10400330	CONBOX 257X327X147X321
10420330	GYPKIT 345X287X315X110

ECO LED GE

Mini multiple for 4x LED GE





4X LED (NOT INCL.)

! MUST BE USED WITH M-LED 70

alu - black	**13130305**
white struc	**13130309**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(M-LED 70 25° white struc - values per lamp module)

	350mA	**500mA**
2700K / 25°	571lm 6.2W	**734lm 9.2W**
3000K / 25°	605lm 6.2W	**813lm 9.2W**
4000K / 25°	649lm 6.2W	**871lm 9.2W**

DRIVER	SEE DRIVER MATRIX
M-LED	SEE BELOW

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10400430	CONBOX 357X222X147X421
10420430	GYPKIT 240X387X210X210

M-LED SEE PAGES 138-141 FOR MORE INFO

14070002	M-LED 70 2700K 15° GE BLACK MATT	**14070402**	M-LED 70 3000K 25° GE BLACK MATT	**14070802**	M-LED 70 4000K 40° GE BLACK MATT
14070009	M-LED 70 2700K 15° GE WHITE STRUC	**14070409**	M-LED 70 3000K 25° GE WHITE STRUC	**14070809**	M-LED 70 4000K 40° GE WHITE STRUC
14070102	M-LED 70 2700K 25° GE BLACK MATT	**14070502**	M-LED 70 3000K 40° GE BLACK MATT	**14070902**	M-LED 70 2000-3000K 15° GE BLACK MATT
14070109	M-LED 70 2700K 25° GE WHITE STRUC	**14070509**	M-LED 70 3000K 40° GE WHITE STRUC	**14070909**	M-LED 70 2000-3000K 15° GE WHITE STRUC
14070202	M-LED 70 2700K 40° GE BLACK MATT	**14070602**	M-LED 70 4000K 15° GE BLACK MATT	**14071002**	M-LED 70 2000-3000K 25° GE BLACK MATT
14070209	M-LED 70 2700K 40° GE WHITE STRUC	**14070609**	M-LED 70 4000K 15° GE WHITE STRUC	**14071009**	M-LED 70 2000-3000K 25° GE WHITE STRUC
14070302	M-LED 70 3000K 15° GE BLACK MATT	**14070702**	M-LED 70 4000K 25° GE BLACK MATT	**14071102**	M-LED 70 2000-3000K 40° GE BLACK MATT
14070309	M-LED 70 3000K 15° GE WHITE STRUC	**14070709**	M-LED 70 4000K 25° GE WHITE STRUC	**14071109**	M-LED 70 2000-3000K 40° GE WHITE STRUC

Mini multiple

MINI MULTIPLE TRIMLESS 2X WITH M-LED 70

MINI MULTIPLE 3X WITH M-LED 70

MINI MULTIPLE 4X WITH M-LED 70

Mini multiple

ECO LED

Mini multiple 1x LED retrofit

230V | R,L | IP20 | GWT 960° | 0.90KG



LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
alu-black	11430005
complete white struc	11430009

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc - values per lamp)

2700K/25°	**395lm 5.4W**

INSTALLATION

10400130	CONBOX 122X257X147X186
10420130	GYPKIT 255X152X110X110

1X LED GU10 INCL. 5.4W

ECO LED

Mini multiple 2x LED retrofit

230V | R,L | IP20 | GWT 960° | 1.40KG



LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
alu-black	11430105
complete white struc	11430109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc - values per lamp)

2700K/25°	**395lm 5.4W**

INSTALLATION

10400230	CONBOX 257X222X147X321
10420230	GYPKIT 240X287X210X110

2X LED GU10 INCL. 5.4W

ECO LED

Mini multiple 3x LED retrofit

230V | R,L | IP20 | GWT 960° | 2.10KG



LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
alu-black	11430205
complete white struc	11430209

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc - values per lamp)

2700K/25°	**395lm 5.4W**

INSTALLATION

10400330	CONBOX 257X327X147X321
10420330	GYPKIT 345X287X315X110

3X LED GU10 INCL. 5.4W

ECO LED

Mini multiple 4x LED retrofit

230V | R,L | IP20 | GWT 960° | 2.70KG





LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
alu-black	11430305
complete white struc	11430309

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc - values per lamp)

2700K/25°	**395lm 5.4W**

INSTALLATION

10400430	CONBOX 357X222X147X421
10420430	GYPKIT 240X387X210X210

4X LED GU10 INCL. 5.4W

HALOGEN 12V GE

Mini multiple 1x MR16 GE

12V | IP20 | GWT 960° | 0.67KG





alu-black	10370705
complete white struc	10370709

INSTALLATION	
10400130	CONBOX 122X257X147X186
10420130	GYPKIT 255X152X110X110

1X QR-CBC 51 | GU 5.3 | MAX. 50W

HALOGEN 12V GE

Mini multiple 2x MR16 GE

12V | IP20 | GWT 960° | 1.14KG



alu-black	10370805
complete white struc	10370809

INSTALLATION	
10400230	CONBOX 257X222X147X321
10420230	GYPKIT 240X287X210X110

2X QR-CBC 51 | GU 5.3 | MAX. 50W

HALOGEN 12V GE

Mini multiple 3x MR16 GE

12V | IP20 | GWT 960° | 1.58KG



alu-black	10370905
complete white struc	10370909

INSTALLATION	
10400330	CONBOX 257X327X147X321
10420330	GYPKIT 345X287X315X110

3X QR-CBC 51 | GU 5.3 | MAX. 50W

HALOGEN 12V GE

Mini multiple 4x MR16 GE

12V | IP20 | GWT 960° | 1.94KG



alu-black	10371005
complete white struc	10371009

INSTALLATION	
10400430	CONBOX 357X222X147X421
10420430	GYPKIT 240X387X210X210

4X QR-CBC 51 | GU 5.3 | MAX. 50W

Mini multiple

HALOGEN 230V

Mini multiple 1x GU10





1X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

alu-black	10351205
complete white struc	10351209

CONNECTED	
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10400130	CONBOX 122X257X147X186
10420130	GYPKIT 255X152X110X110

HALOGEN 230V

Mini multiple 2x GU10



2X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

alu-black	10351305
complete white struc	10351309

CONNECTED	
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10400230	CONBOX 257X222X147X321
10420230	GYPKIT 240X287X210X110

HALOGEN 230V

Mini multiple 3x GU10





3X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

alu-black	10351405
complete white struc	10351409

CONNECTED	
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10400330	CONBOX 257X327X147X321
10420330	GYPKIT 345X287X315X110

HALOGEN 230V

Mini multiple 4x GU10





4X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

alu-black	10351505
complete white struc	10351509

CONNECTED	
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10400430	CONBOX 357X222X147X421
10420430	GYPKIT 240X387X210X210

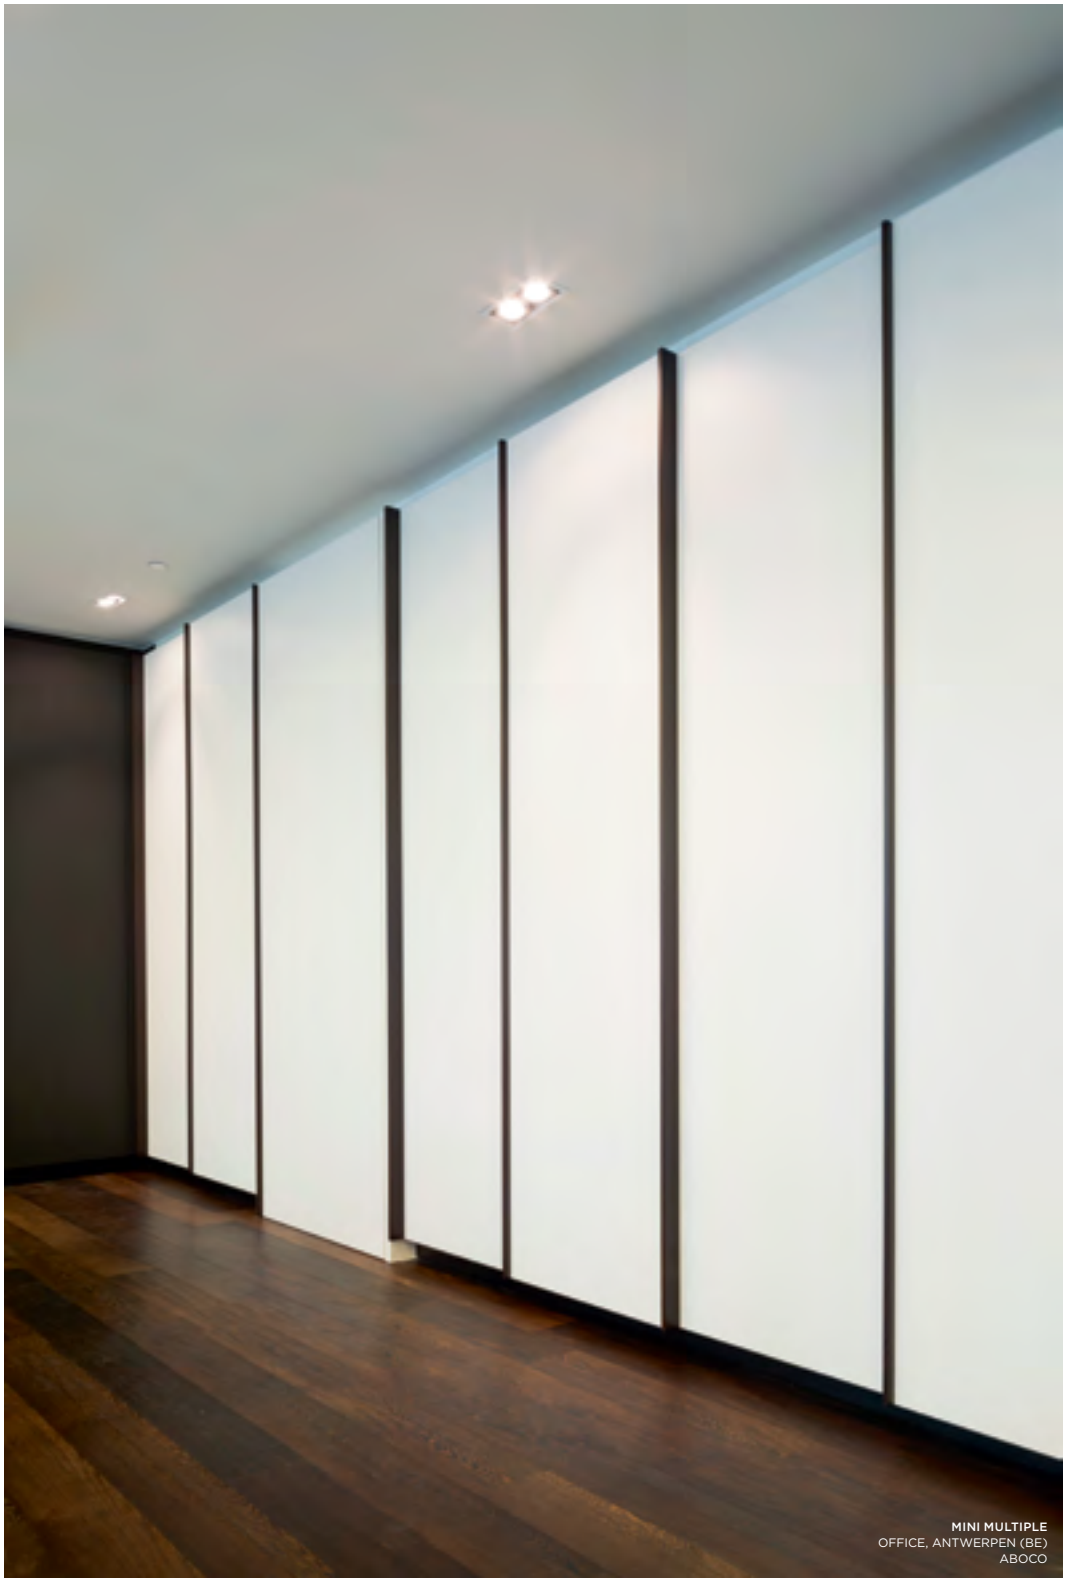

MINI MULTIPLE
OFFICE, ANTWERPEN (BE)
ABOCO

Mini multiple for Smart rings

ECO LED GE

Mini multiple for smart rings 1x LED GE



1X LED ARRAY INCL. 9.2W

! MUST BE USED WITH SMART FRONTRINGS

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
alu-black	12524005	12524105	12524205
white struc	12524009	12524109	12524209

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

DRIVER	SEE DRIVER MATRIX

INSTALLATION	
10400130	CONBOX 122X257X147X186
10420130	GYPKIT 255X152X110X110

SMART FRONTRINGS	SEE BELOW

ECO LED GE

Mini multiple for smart rings 2x LED GE





2X LED ARRAY INCL. 9.2W

! MUST BE USED WITH SMART FRONTRINGS

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
alu-black	12525005	12525105	12525205
white struc	12525009	12525109	12525209

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

DRIVER	SEE DRIVER MATRIX

INSTALLATION	
10400230	CONBOX 257X222X147X321
10420230	GYPKIT 240X287X210X110

SMART FRONTRINGS	SEE BELOW

SMART FRONTRINGS

12553002	SMART FLAT FRONTRING 25° BLACK
12553009	SMART FLAT FRONTRING 25° WHITE STRUC
12553102	SMART FLAT FRONTRING 40° BLACK
12553109	SMART FLAT FRONTRING 40° WHITE STRUC
12553202	SMART FLAT FRONTRING 15° BLACK
12553209	SMART FLAT FRONTRING 15° WHITE STRUC
12554002	SMART CAKE FRONTRING 25° BLACK
12554009	SMART CAKE FRONTRING 25° WHITE STRUC
12554102	SMART CAKE FRONTRING 40° BLACK
12554109	SMART CAKE FRONTRING 40° WHITE STRUC
12554202	SMART CAKE FRONTRING 15° BLACK
12554209	SMART CAKE FRONTRING 15° WHITE STRUC

12555002	SMART LOTIS FRONTRING 25° BLACK
12555009	SMART LOTIS FRONTRING 25° WHITE STRUC
12555102	SMART LOTIS FRONTRING 40° BLACK
12555109	SMART LOTIS FRONTRING 40° WHITE STRUC
12555202	SMART LOTIS FRONTRING 15° BLACK
12555209	SMART LOTIS FRONTRING 15° WHITE STRUC
12556002	SMART KUP FRONTRING 25° BLACK
12556009	SMART KUP FRONTRING 25° WHITE STRUC
12556102	SMART KUP FRONTRING 40° BLACK
12556109	SMART KUP FRONTRING 40° WHITE STRUC
12556202	SMART KUP FRONTRING 15° BLACK
12556209	SMART KUP FRONTRING 15° WHITE STRUC


SMART FLAT FRONTRING


SMART CAKE FRONTRING


SMART KUP FRONTRING


SMART LOTIS FRONTRING

ECO LED GE

Mini multiple for smart rings 3x LED GE



3X LED ARRAY INCL. 9.2W

! MUST BE USED WITH SMART FRONTRINGS

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
alu-black	12526005	12526105	12526205
white struc	12526009	12526109	12526209

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

DRIVER	SEE DRIVER MATRIX

INSTALLATION	
10400330	CONBOX 257X327X147X321
10420330	GYPKIT 345X287X315X110

SMART FRONTRINGS	SEE LEFT PAGE

ECO LED GE

Mini multiple for smart rings 4x LED GE



4X LED ARRAY INCL. 9.2W

! MUST BE USED WITH SMART FRONTRINGS

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
alu-black	12527005	12527105	12527205
white struc	12527009	12527109	12527209

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

DRIVER	SEE DRIVER MATRIX

INSTALLATION	
10400430	CONBOX 357X222X147X421
10420430	GYPKIT 240X387X210X210

SMART FRONTRINGS	SEE LEFT PAGE

MINI MULTIPLE WITH SMART CAKE FRONTRING

PRIVATE RESIDENCE, KAIN (BE)

Mini multiple trimless

ECO LED GE

Mini multiple trimless for 1x LED GE



1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 70

Friends of hue | III | 500mA | IP20 | GWT 960° | 0.64KG

black	**13131002**
white struc	**13131009**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(M-LED 70 25° white struc - values per lamp module)

	350mA	**500mA**
2700K / 25°	571lm 6.2W	**734lm 9.2W**
3000K / 25°	605lm 6.2W	**813lm 9.2W**
4000K / 25°	649lm 6.2W	**871lm 9.2W**

DRIVER	SEE DRIVER MATRIX
M-LED	SEE BELOW

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10440130	CONBOX 137X158X130X215
10460130	RECESSED FRAME MINI MULTIPLE TRIMLESS 1X

ECO LED GE

Mini multiple trimless for 2x LED GE



2X LED (NOT INCL.)

! MUST BE USED WITH M-LED 70

Friends of hue | III | 500mA | IP20 | GWT 960° | 0.90KG

black	**13131102**
white struc	**13131109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(M-LED 70 25° white struc - values per lamp module)

	350mA	**500mA**
2700K / 25°	571lm 6.2W	**734lm 9.2W**
3000K / 25°	605lm 6.2W	**813lm 9.2W**
4000K / 25°	649lm 6.2W	**871lm 9.2W**

DRIVER	SEE DRIVER MATRIX
M-LED	SEE BELOW

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10440230	CONBOX 237X158X130X315
10460230	RECESSED FRAME MINI MULTIPLE TRIMLESS 2X

M-LED SEE PAGES 138-141 FOR MORE INFO

14070002	M-LED 70 2700K 15° GE BLACK MATT	**14070402**	M-LED 70 3000K 25° GE BLACK MATT	**14070802**	M-LED 70 4000K 40° GE BLACK MATT
14070009	M-LED 70 2700K 15° GE WHITE STRUC	**14070409**	M-LED 70 3000K 25° GE WHITE STRUC	**14070809**	M-LED 70 4000K 40° GE WHITE STRUC
14070102	M-LED 70 2700K 25° GE BLACK MATT	**14070502**	M-LED 70 3000K 40° GE BLACK MATT	**14070902**	M-LED 70 2000-3000K 15° GE BLACK MATT
14070109	M-LED 70 2700K 25° GE WHITE STRUC	**14070509**	M-LED 70 3000K 40° GE WHITE STRUC	**14070909**	M-LED 70 2000-3000K 15° GE WHITE STRUC
14070202	M-LED 70 2700K 40° GE BLACK MATT	**14070602**	M-LED 70 4000K 15° GE BLACK MATT	**14071002**	M-LED 70 2000-3000K 25° GE BLACK MATT
14070209	M-LED 70 2700K 40° GE WHITE STRUC	**14070609**	M-LED 70 4000K 15° GE WHITE STRUC	**14071009**	M-LED 70 2000-3000K 25° GE WHITE STRUC
14070302	M-LED 70 3000K 15° GE BLACK MATT	**14070702**	M-LED 70 4000K 25° GE BLACK MATT	**14071102**	M-LED 70 2000-3000K 40° GE BLACK MATT
14070309	M-LED 70 3000K 15° GE WHITE STRUC	**14070709**	M-LED 70 4000K 25° GE WHITE STRUC	**14071109**	M-LED 70 2000-3000K 40° GE WHITE STRUC

ECO LED GE

Mini multiple trimless for 3x LED GE





3X LED (NOT INCL.)

! MUST BE USED WITH M-LED 70

Friends of hue | III | 500mA | IP20 | GWT 960° | 1.23KG

black	**13131202**
white struc	**13131209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(M-LED 70 25° white struc - values per lamp module)

	350mA	**500mA**
2700K / 25°	571lm 6.2W	**734lm 9.2W**
3000K / 25°	605lm 6.2W	**813lm 9.2W**
4000K / 25°	649lm 6.2W	**871lm 9.2W**

DRIVER	SEE DRIVER MATRIX
M-LED	SEE LEFT PAGE

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10440730	CONBOX 342X158X130X420
10460730	RECESSED FRAME MINI MULTIPLE TRIMLESS 3X

ECO LED GE

Mini multiple trimless for 4x LED GE





4X LED (NOT INCL.)

! MUST BE USED WITH M-LED 70

Friends of hue | III | 500mA | IP20 | GWT 960° | 1.53KG

black	**13131302**
white struc	**13131309**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(M-LED 70 25° white struc - values per lamp module)

	350mA	**500mA**
2700K / 25°	571lm 6.2W	**734lm 9.2W**
3000K / 25°	605lm 6.2W	**813lm 9.2W**
4000K / 25°	649lm 6.2W	**871lm 9.2W**

DRIVER	SEE DRIVER MATRIX
M-LED	SEE LEFT PAGE

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10440430	CONBOX 237X258X130X315
10460430	RECESSED FRAME MINI MULTIPLE TRIMLESS 4X

Mini multiple trimless

ECO LED

Mini multiple trimless 1x LED retrofit

230V | R,L | IP20 | GWT 960° | 0.70KG



LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
black	**11440002**
complete white struc	**11440009**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc - values per lamp)

2700K/25°	**395lm 5.4W**

INSTALLATION

10440130	CONBOX 137X158X130X215
10460130	RECESSED FRAME MINI MULTIPLE TRIMLESS 1X

1X LED GU10 INCL. 5.4W

ECO LED

Mini multiple trimless 2x LED retrofit

230V | R,L | IP20 | GWT 960° | 1.20KG





LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
black	**11440102**
complete white struc	**11440109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc - values per lamp)

2700K/25°	**395lm 5.4W**

INSTALLATION

10440230	CONBOX 237X158X130X315
10460230	RECESSED FRAME MINI MULTIPLE TRIMLESS 2X

2X LED GU10 INCL. 5.4W

ECO LED

Mini multiple trimless 3x LED retrofit

230V | R,L | IP20 | GWT 960° | 1.80KG



LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
black	**11440202**
complete white struc	**11440209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc - values per lamp)

2700K/25°	**395lm 5.4W**

INSTALLATION

10440730	CONBOX 342X158X130X420
10460730	RECESSED FRAME MINI MULTIPLE TRIMLESS 3X

3X LED GU10 INCL. 5.4W

ECO LED

Mini multiple trimless 4x LED retrofit

230V | R,L | IP20 | GWT 960° | 2.30KG



LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
black	**11440302**
complete white struc	**11440309**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc - values per lamp)

2700K/25°	**395lm 5.4W**

INSTALLATION

10440430	CONBOX 237X258X130X315
10460430	RECESSED FRAME MINI MULTIPLE TRIMLESS 4X

4X LED GU10 INCL. 5.4W

HALOGEN 12V GE

Mini multiple trimless 1x MR16 GE



1X QR-CBC 51 | GU 5.3 | MAX. 50W

12V | IP20 | GWT 960° | 0.72KG

black	**10380702**
complete white struc	**10380709**

INSTALLATION	
10440130	CONBOX 137X158X130X215
10460130	RECESSED FRAME MINI MULTIPLE TRIMLESS 1X

HALOGEN 12V GE

Mini multiple trimless 2x MR16 GE



2X QR-CBC 51 | GU 5.3 | MAX. 50W

12V | IP20 | GWT 960° | 1.01KG

black	**10380802**
complete white struc	**10380809**

INSTALLATION	
10440230	CONBOX 237X158X130X315
10460230	RECESSED FRAME MINI MULTIPLE TRIMLESS 2X

HALOGEN 12V GE

Mini multiple trimless 3x MR16 GE



3X QR-CBC 51 | GU 5.3 | MAX. 50W

12V | IP20 | GWT 960° | 1.39KG

black	**10382002**
complete white struc	**10382009**

INSTALLATION	
10440730	CONBOX 342X158X130X420
10460730	RECESSED FRAME MINI MULTIPLE TRIMLESS 3X

HALOGEN 12V GE

Mini multiple trimless 4x MR16 GE



4X QR-CBC 51 | GU 5.3 | MAX. 50W

12V | IP20 | GWT 960° | 1.74KG

black	**10381002**
complete white struc	**10381009**

INSTALLATION	
10440430	CONBOX 237X258X130X315
10460430	RECESSED FRAME MINI MULTIPLE TRIMLESS 4X

Mini multiple trimless

HALOGEN 230V

Mini multiple trimless 1x GU10



1X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

black	**10381502**
complete white struc	**10381509**

CONNECTED	
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10440130	CONBOX 137X158X130X215
10460130	RECESSED FRAME MINI MULTIPLE TRIMLESS 1X

HALOGEN 230V

Mini multiple trimless 2x GU10



2X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

black	**10381602**
complete white struc	**10381609**

CONNECTED	
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10440230	CONBOX 237X158X130X315
10460230	RECESSED FRAME MINI MULTIPLE TRIMLESS 2X

HALOGEN 230V

Mini multiple trimless 3x GU10





3X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

black	**10382202**
complete white struc	**10382209**

CONNECTED	
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10440730	CONBOX 342X158X130X420
10460730	RECESSED FRAME MINI MULTIPLE TRIMLESS 3X

HALOGEN 230V

Mini multiple trimless 4x GU10





4X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

black	**10381902**
complete white struc	**10381909**

CONNECTED	
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10440430	CONBOX 237X258X130X315
10460430	RECESSED FRAME MINI MULTIPLE TRIMLESS 4X

MINI MULTIPLE TRIMLESS
INGENIUM, BRUGGE (BE)
ARCHITECTEN GROEP III

Mini multiple trimless for Smart rings

ECO LED GE

Mini multiple trimless for smart rings 1x LED GE





1X LED ARRAY INCL. 9.2W

! MUST BE USED WITH SMART FRONTRINGS
! RECESSED FRAME INCLUDED

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black	12535002	12535102	12535202
white struc	12535009	12535109	12535209

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

DRIVER	SEE DRIVER MATRIX

INSTALLATION	
10440130	CONBOX 137X158X130X215
10460130	RECESSED FRAME MINI MULTIPLE TRIMLESS 1X

SMART FRONTRINGS	SEE BELOW

ECO LED GE

Mini multiple trimless for smart rings 2x LED GE





2X LED ARRAY INCL. 9.2W

! MUST BE USED WITH SMART FRONTRINGS
! RECESSED FRAME INCLUDED

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black	12536002	12536102	12536202
white struc	12536009	12536109	12536209

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

DRIVER	SEE DRIVER MATRIX

INSTALLATION	
10440230	CONBOX 237X158X130X315
10460230	RECESSED FRAME MINI MULTIPLE TRIMLESS 2X

SMART FRONTRINGS	SEE BELOW

SMART FRONTRINGS

12553002	SMART FLAT FRONTRING 25° BLACK
12553009	SMART FLAT FRONTRING 25° WHITE STRUC
12553102	SMART FLAT FRONTRING 40° BLACK
12553109	SMART FLAT FRONTRING 40° WHITE STRUC
12553202	SMART FLAT FRONTRING 15° BLACK
12553209	SMART FLAT FRONTRING 15° WHITE STRUC
12554002	SMART CAKE FRONTRING 25° BLACK
12554009	SMART CAKE FRONTRING 25° WHITE STRUC
12554102	SMART CAKE FRONTRING 40° BLACK
12554109	SMART CAKE FRONTRING 40° WHITE STRUC
12554202	SMART CAKE FRONTRING 15° BLACK
12554209	SMART CAKE FRONTRING 15° WHITE STRUC

12555002	SMART LOTIS FRONTRING 25° BLACK
12555009	SMART LOTIS FRONTRING 25° WHITE STRUC
12555102	SMART LOTIS FRONTRING 40° BLACK
12555109	SMART LOTIS FRONTRING 40° WHITE STRUC
12555202	SMART LOTIS FRONTRING 15° BLACK
12555209	SMART LOTIS FRONTRING 15° WHITE STRUC
12556002	SMART KUP FRONTRING 25° BLACK
12556009	SMART KUP FRONTRING 25° WHITE STRUC
12556102	SMART KUP FRONTRING 40° BLACK
12556109	SMART KUP FRONTRING 40° WHITE STRUC
12556202	SMART KUP FRONTRING 15° BLACK
12556209	SMART KUP FRONTRING 15° WHITE STRUC


SMART FLAT FRONTRING


SMART CAKE FRONTRING


SMART KUP FRONTRING


SMART LOTIS FRONTRING

ECO LED GE

Mini multiple trimless for smart rings 3x LED GE



3X LED ARRAY INCL. 9.2W

! MUST BE USED WITH SMART FRONTRINGS
! RECESSED FRAME INCLUDED

Friends of hue | III | 500mA | IP20 | GWT 960° | 1.39KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black	12537002	12537102	12537202
white struc	12537009	12537109	12537209

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

DRIVER	SEE DRIVER MATRIX

INSTALLATION	
10440730	CONBOX 342X158X130X420
10460730	RECESSED FRAME MINI MULTIPLE TRIMLESS 3X

SMART FRONTRINGS	SEE LEFT PAGE

ECO LED GE

Mini multiple trimless for smart rings 4x LED GE



4X LED ARRAY INCL. 9.2W

! MUST BE USED WITH SMART FRONTRINGS
! RECESSED FRAME INCLUDED

Friends of hue | III | 500mA | IP20 | GWT 960° | 1.70KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black	12538002	12538102	12538202
white struc	12538009	12538109	12538209

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

DRIVER	SEE DRIVER MATRIX

INSTALLATION	
10440430	CONBOX 237X258X130X315
10460430	RECESSED FRAME MINI MULTIPLE TRIMLESS 4X

SMART FRONTRINGS	SEE LEFT PAGE

Mini multiple

MINI MULTIPLE TRIMLESS
PRIVATE RESIDENCE, ROTTERDAM (NL)
ERIC KANT

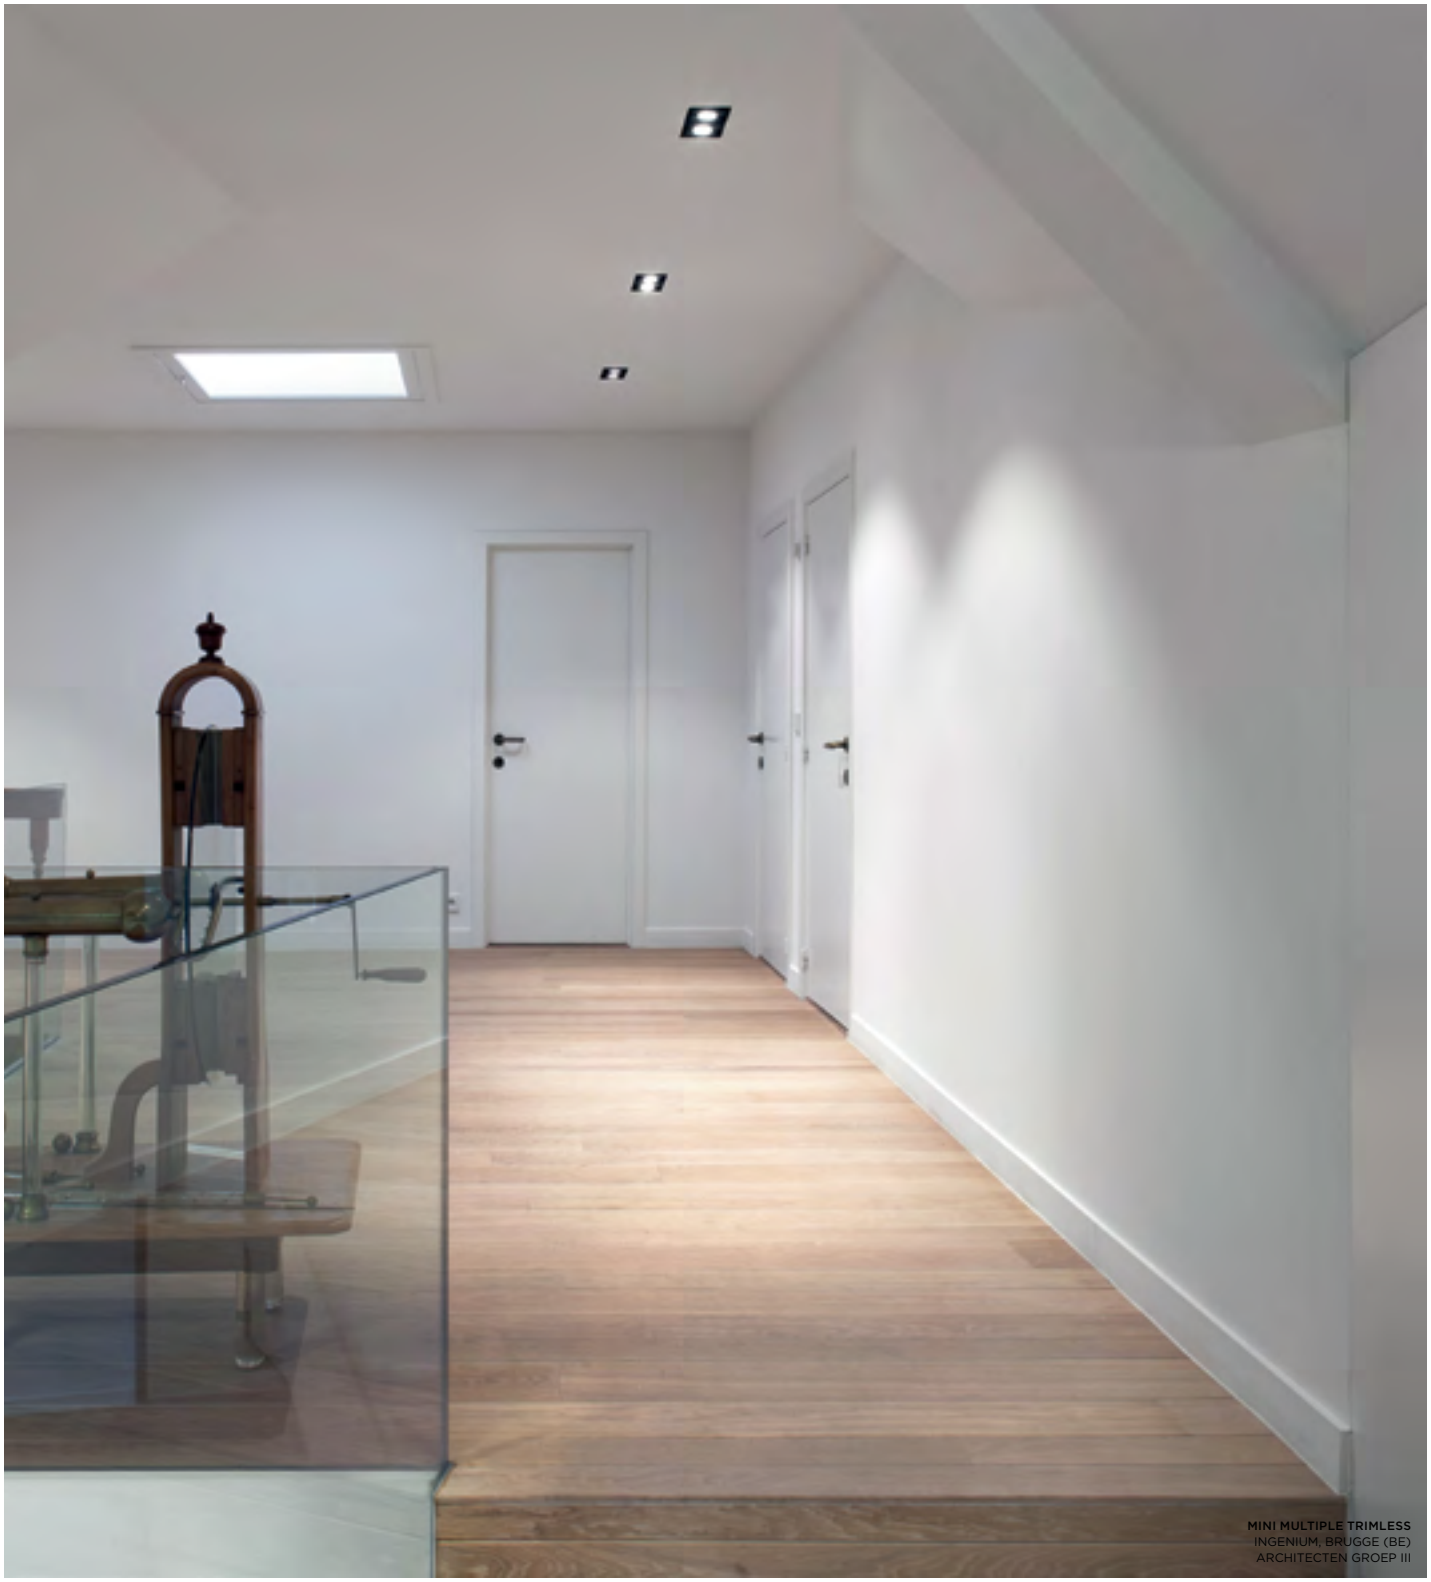

MINI MULTIPLE TRIMLESS
INGENIUM, BRUGGE (BE)
ARCHITECTEN GROEP III

Multiple

MULTIPLE 1X

MULTIPLE TRIMLESS 2X

ECO LED GE

Multiple for 1x LED GE





1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 111

alu - black	**13170005**
white struc	**13170009**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(M-LED 111 25° white struc - values per lamp module)

	350mA	**500mA**	700mA	900mA
2700K / 25°	920lm 11W	**1256lm 16.25W**	1625lm 23.6W	1907lm 31.2W
3000K / 25°	904lm 11W	**1233lm 16.25W**	1596lm 23.6W	1874lm 31.2W
4000K / 25°	1053lm 11W	**1437lm 16.25W**	1860lm 23.6W	2187lm 31.2W

DRIVER	SEE DRIVER MATRIX
M-LED	SEE BELOW

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10390130	CONBOX 183X312X122X247
10410130	GYPKIT 310X212X170X170

ECO LED GE

Multiple for 2x LED GE





2X LED (NOT INCL.)

! MUST BE USED WITH M-LED 111

alu - black	**13170105**
white struc	**13170109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(M-LED 111 25° white struc - values per lamp module)

	350mA	**500mA**	700mA	900mA
2700K / 25°	920lm 11W	**1256lm 16.25W**	1625lm 23.6W	1907lm 31.2W
3000K / 25°	904lm 11W	**1233lm 16.25W**	1596lm 23.6W	1874lm 31.2W
4000K / 25°	1053lm 11W	**1437lm 16.25W**	1860lm 23.6W	2187lm 31.2W

DRIVER	SEE DRIVER MATRIX
M-LED	SEE BELOW

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10390230	CONBOX 228X387X122X292
10410230	GYPKIT 385X257X325X170

M-LED SEE PAGES 138-141 FOR MORE INFO

11298002	M-LED 111 2700K 15° GE BLACK MATT	**11298302**	M-LED 111 3000K 15° GE BLACK MATT	**11298602**	M-LED 111 4000K 15° GE BLACK MATT
11298009	M-LED 111 2700K 15° GE WHITE STRUC	**11298309**	M-LED 111 3000K 15° GE WHITE STRUC	**11298609**	M-LED 111 4000K 15° GE WHITE STRUC
11298024	M-LED 111 2700K 15° GE BRUSHED ALU	**11298324**	M-LED 111 3000K 15° GE BRUSHED ALU	**11298624**	M-LED 111 4000K 15° GE BRUSHED ALU
11298102	M-LED 111 2700K 25° GE BLACK MATT	**11298402**	M-LED 111 3000K 25° GE BLACK MATT	**11298702**	M-LED 111 4000K 25° GE BLACK MATT
11298109	M-LED 111 2700K 25° GE WHITE STRUC	**11298409**	M-LED 111 3000K 25° GE WHITE STRUC	**11298709**	M-LED 111 4000K 25° GE WHITE STRUC
11298124	M-LED 111 2700K 25° GE BRUSHED ALU	**11298424**	M-LED 111 3000K 25° GE BRUSHED ALU	**11298724**	M-LED 111 4000K 25° GE BRUSHED ALU
11298202	M-LED 111 2700K 40° GE BLACK MATT	**11298502**	M-LED 111 3000K 40° GE BLACK MATT	**11298802**	M-LED 111 4000K 40° GE BLACK MATT
11298209	M-LED 111 2700K 40° GE WHITE STRUC	**11298509**	M-LED 111 3000K 40° GE WHITE STRUC	**11298809**	M-LED 111 4000K 40° GE WHITE STRUC
11298224	M-LED 111 2700K 40° GE BRUSHED ALU	**11298524**	M-LED 111 3000K 40° GE BRUSHED ALU	**11298824**	M-LED 111 4000K 40° GE BRUSHED ALU

Multiple

ECO LED GE

Multiple for 3x LED GE



3X LED (NOT INCL.)

! MUST BE USED WITH M-LED 111

Friends of hue | III | 500mA | IP20 | GWT 960° | 2.90KG | ▲

alu - black	**13170205**
white struc	**13170209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(M-LED 111 25° white struc - values per lamp module)

	350mA	**500mA**	700mA	900mA
2700K / 25°	920lm 11W	**1256lm 16.25W**	1625lm 23.6W	1907lm 31.2W
3000K / 25°	904lm 11W	**1233lm 16.25W**	1596lm 23.6W	1874lm 31.2W
4000K / 25°	1053lm 11W	**1437lm 16.25W**	1860lm 23.6W	2187lm 31.2W

DRIVER	SEE DRIVER MATRIX
M-LED	SEE BELOW

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10390330	CONBOX 228X532X122X292
10410330	GYPKIT 530X257X470X170

ECO LED GE

Multiple for 4x LED GE





4X LED (NOT INCL.)

! MUST BE USED WITH M-LED 111

Friends of hue | III | 500mA | IP20 | GWT 960° | 3.80KG | ▲

alu - black	**13170305**
white struc	**13170309**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(M-LED 111 25° white struc - values per lamp module)

	350mA	**500mA**	700mA	900mA
2700K / 25°	920lm 11W	**1256lm 16.25W**	1625lm 23.6W	1907lm 31.2W
3000K / 25°	904lm 11W	**1233lm 16.25W**	1596lm 23.6W	1874lm 31.2W
4000K / 25°	1053lm 11W	**1437lm 16.25W**	1860lm 23.6W	2187lm 31.2W

DRIVER	SEE DRIVER MATRIX
M-LED	SEE BELOW

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10390430	CONBOX 382X387X122X446
10410430	GYPKIT 385X412X325X325

M-LED						SEE PAGES 138-141 FOR MORE INFO
11298002	M-LED 111 2700K 15° GE BLACK MATT	**11298302**	M-LED 111 3000K 15° GE BLACK MATT	**11298602**	M-LED 111 4000K 15° GE BLACK MATT
11298009	M-LED 111 2700K 15° GE WHITE STRUC	**11298309**	M-LED 111 3000K 15° GE WHITE STRUC	**11298609**	M-LED 111 4000K 15° GE WHITE STRUC
11298024	M-LED 111 2700K 15° GE BRUSHED ALU	**11298324**	M-LED 111 3000K 15° GE BRUSHED ALU	**11298624**	M-LED 111 4000K 15° GE BRUSHED ALU
11298102	M-LED 111 2700K 25° GE BLACK MATT	**11298402**	M-LED 111 3000K 25° GE BLACK MATT	**11298702**	M-LED 111 4000K 25° GE BLACK MATT
11298109	M-LED 111 2700K 25° GE WHITE STRUC	**11298409**	M-LED 111 3000K 25° GE WHITE STRUC	**11298709**	M-LED 111 4000K 25° GE WHITE STRUC
11298124	M-LED 111 2700K 25° GE BRUSHED ALU	**11298424**	M-LED 111 3000K 25° GE BRUSHED ALU	**11298724**	M-LED 111 4000K 25° GE BRUSHED ALU
11298202	M-LED 111 2700K 40° GE BLACK MATT	**11298502**	M-LED 111 3000K 40° GE BLACK MATT	**11298802**	M-LED 111 4000K 40° GE BLACK MATT
11298209	M-LED 111 2700K 40° GE WHITE STRUC	**11298509**	M-LED 111 3000K 40° GE WHITE STRUC	**11298809**	M-LED 111 4000K 40° GE WHITE STRUC
11298224	M-LED 111 2700K 40° GE BRUSHED ALU	**11298524**	M-LED 111 3000K 40° GE BRUSHED ALU	**11298824**	M-LED 111 4000K 40° GE BRUSHED ALU

MULTIPLE
ESSERS, GENK (BE)
DIA HASSELT

Multiple

MULTIPLE
HET NIEUWE INSTITUUT, ROTTERDAM (NL)

HALOGEN 12V | GE

Multiple 1x AR111 GE





alu-black	10350105
complete white struc	10350109

M-LED SEE PAGE 194

INSTALLATION

10390130	CONBOX 183X312X122X247
10410130	GYPKIT 310X212X170X170

1X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111

HALOGEN 12V | GE

Multiple 2x AR111 GE





alu-black	10350205
complete white struc	10350209

M-LED SEE PAGE 194

INSTALLATION

10390230	CONBOX 228X387X122X292
10410230	GYPKIT 385X257X325X170

2X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111

HALOGEN 12V | GE

Multiple 3x AR111 GE



alu-black	10350305
complete white struc	10350309

M-LED SEE PAGE 194

INSTALLATION

10390330	CONBOX 228X532X122X292
10410330	GYPKIT 530X257X470X170

3X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111

HALOGEN 12V | GE

Multiple 4x AR111 GE





alu-black	10350405
complete white struc	10350409

M-LED SEE PAGE 194

INSTALLATION

10390430	CONBOX 382X387X122X446
10410430	GYPKIT 385X412X325X325

4X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111

Multiple trimless

ECO LED GE

Multiple trimless for 1x LED GE





1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 111

Friends of hue | III | 500mA | IP20 | GWT 960° | 0.55KG

black	**13171002**
white struc	**13171009**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(M-LED 111 25° white struc - values per lamp module)

	350mA	**500mA**	700mA	900mA
2700K / 25°	920lm 11W	**1256lm 16.25W**	1625lm 23.6W	1907lm 31.2W
3000K / 25°	904lm 11W	**1233lm 16.25W**	1596lm 23.6W	1874lm 31.2W
4000K / 25°	1053lm 11W	**1437lm 16.25W**	1860lm 23.6W	2187lm 31.2W

DRIVER	SEE DRIVER MATRIX
M-LED	SEE BELOW

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10430130	CONBOX 194X215X120X272
10450130	RECESSED FRAME MULTIPLE TRIMLESS 1X

ECO LED GE

Multiple trimless for 2x LED GE



2X LED (NOT INCL.)

! MUST BE USED WITH M-LED 111

Friends of hue | III | 500mA | IP20 | GWT 960° | 1.60KG

black	**13171102**
white struc	**13171109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(M-LED 111 25° white struc - values per lamp module)

	350mA	**500mA**	700mA	900mA
2700K / 25°	920lm 11W	**1256lm 16.25W**	1625lm 23.6W	1907lm 31.2W
3000K / 25°	904lm 11W	**1233lm 16.25W**	1596lm 23.6W	1874lm 31.2W
4000K / 25°	1053lm 11W	**1437lm 16.25W**	1860lm 23.6W	2187lm 31.2W

DRIVER	SEE DRIVER MATRIX
M-LED	SEE BELOW

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10430230	CONBOX 349X215X120X427
10450230	RECESSED FRAME MULTIPLE TRIMLESS 2X

M-LED						SEE PAGES 138-141 FOR MORE INFO
11298002	M-LED 111 2700K 15° GE BLACK MATT	**11298302**	M-LED 111 3000K 15° GE BLACK MATT	**11298602**	M-LED 111 4000K 15° GE BLACK MATT
11298009	M-LED 111 2700K 15° GE WHITE STRUC	**11298309**	M-LED 111 3000K 15° GE WHITE STRUC	**11298609**	M-LED 111 4000K 15° GE WHITE STRUC
11298024	M-LED 111 2700K 15° GE BRUSHED ALU	**11298324**	M-LED 111 3000K 15° GE BRUSHED ALU	**11298624**	M-LED 111 4000K 15° GE BRUSHED ALU
11298102	M-LED 111 2700K 25° GE BLACK MATT	**11298402**	M-LED 111 3000K 25° GE BLACK MATT	**11298702**	M-LED 111 4000K 25° GE BLACK MATT
11298109	M-LED 111 2700K 25° GE WHITE STRUC	**11298409**	M-LED 111 3000K 25° GE WHITE STRUC	**11298709**	M-LED 111 4000K 25° GE WHITE STRUC
11298124	M-LED 111 2700K 25° GE BRUSHED ALU	**11298424**	M-LED 111 3000K 25° GE BRUSHED ALU	**11298724**	M-LED 111 4000K 25° GE BRUSHED ALU
11298202	M-LED 111 2700K 40° GE BLACK MATT	**11298502**	M-LED 111 3000K 40° GE BLACK MATT	**11298802**	M-LED 111 4000K 40° GE BLACK MATT
11298209	M-LED 111 2700K 40° GE WHITE STRUC	**11298509**	M-LED 111 3000K 40° GE WHITE STRUC	**11298809**	M-LED 111 4000K 40° GE WHITE STRUC
11298224	M-LED 111 2700K 40° GE BRUSHED ALU	**11298524**	M-LED 111 3000K 40° GE BRUSHED ALU	**11298824**	M-LED 111 4000K 40° GE BRUSHED ALU

ECO LED GE

Multiple trimless for 3x LED GE



3X LED (NOT INCL.)

! MUST BE USED WITH M-LED 111

black	**13171202**
white struc	**13171209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(M-LED 111 25° white struc - values per lamp module)

	350mA	**500mA**	700mA	900mA
2700K / 25°	920lm 11W	**1256lm 16.25W**	1625lm 23.6W	1907lm 31.2W
3000K / 25°	904lm 11W	**1233lm 16.25W**	1596lm 23.6W	1874lm 31.2W
4000K / 25°	1053lm 11W	**1437lm 16.25W**	1860lm 23.6W	2187lm 31.2W

DRIVER	SEE DRIVER MATRIX
M-LED	SEE LEFT PAGE

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10430330	CONBOX 492X215X120X570
10450330	RECESSED FRAME MULTIPLE TRIMLESS 3X

ECO LED GE

Multiple trimless for 4x LED GE





4X LED (NOT INCL.)

! MUST BE USED WITH M-LED 111

black	**13171302**
white struc	**13171309**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(M-LED 111 25° white struc - values per lamp module)

	350mA	**500mA**	700mA	900mA
2700K / 25°	920lm 11W	**1256lm 16.25W**	1625lm 23.6W	1907lm 31.2W
3000K / 25°	904lm 11W	**1233lm 16.25W**	1596lm 23.6W	1874lm 31.2W
4000K / 25°	1053lm 11W	**1437lm 16.25W**	1860lm 23.6W	2187lm 31.2W

DRIVER	SEE DRIVER MATRIX
M-LED	SEE LEFT PAGE

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10430430	CONBOX 349X370X120X427
10450430	RECESSED FRAME MULTIPLE TRIMLESS 4X

Multiple trimless

MULTIPLE TRIMLESS
PRIVATE RESIDENCE, EERSEL (NL)
SENNAH STUDIO

HALOGEN 12V | GE

Multiple trimless 1x AR111 GE





1X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111

black	**10360102**
complete white struc	**10360109**

M-LED SEE PAGE 198

INSTALLATION

10430130	CONBOX 194X215X120X272
10450130	RECESSED FRAME MULTIPLE TRIMLESS 1X

III | 12V | IP20 | GWT 960° | 0.75KG

HALOGEN 12V | GE

Multiple trimless 2x AR111 GE





2X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111

black	**10360202**
complete white struc	**10360209**

M-LED SEE PAGE 198

INSTALLATION

10430230	CONBOX 349X215X120X427
10450230	RECESSED FRAME MULTIPLE TRIMLESS 2X

III | 12V | IP20 | GWT 960° | 1.70KG

HALOGEN 12V | GE

Multiple trimless 3x AR111 GE



3X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111

black	**10360302**
complete white struc	**10360309**

M-LED SEE PAGE 198

INSTALLATION

10430330	CONBOX 492X215X120X570
10450330	RECESSED FRAME MULTIPLE TRIMLESS 3X

III | 12V | IP20 | GWT 960° | 2.65KG

HALOGEN 12V | GE

Multiple trimless 4x AR111 GE





4X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111

black	**10360402**
complete white struc	**10360409**

M-LED SEE PAGE 198

INSTALLATION

10430430	CONBOX 349X370X120X427
10450430	RECESSED FRAME MULTIPLE TRIMLESS 4X

III | 12V | IP20 | GWT 960° | 3.05KG

Multiple

MULTIPLE
URBAN LODGE HOTEL, AMSTERDAM (NL)
HILARY LANCASTER

MULTIPLE TRIMLESS
APOTHEEK, BERENDRECHT (BE)
SCULP IT

Multiple

MULTIPLE TRIMLESS
PRIVATE RESIDENCE, AMSTERDAM (NL)

MULTIPLE TRIMLESS
PRIVATE RESIDENCE, ROTTERDAM (NL)
ERIC KANT

Multiple

MULTIPLE TRIMLESS
APOTHEEK, DEERLIJK (BE)
WILLEM BENOIT INTERIEUR

MULTIPLE TRIMLESS
APOTHEEK, BERENDRECHT (BE)
SCULP IT

Nomad

Nomad is a classic. This refined, industrial fitting with its visible wiring is perfect for highlighting your favourite elements in your interior. The family comprises a wide range of lighting solutions. With the integration of the new M-LED 111 in combination with the appropriate LED gear, Nomad is ready for a bright future.

SUPERMODULAR.COM/EN/NOMAD

ECO LED GE

Nomad 111 2x LED GE



2X LED ARRAY INCL. 16.25W

! 3500K ON REQUEST
! BASE FLANGE OPTIONAL

	2700K / CRI90+			3000K / CRI90+			4000K / CRI90+		
	15°	25°	40°	15°	25°	40°	15°	25°	40°
alu	12023005	12023105	12023205	12023305	12023405	12023505	12023605	12023705	12023805
black	12023002	12023102	12023202	12023302	12023402	12023502	12023602	12023702	12023802
white struc	12023009	12023109	12023209	12023309	12023409	12023509	12023609	12023709	12023809

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc - values per lamp module)

	350mA	**500mA**	700mA	900mA
2700K / 25°	920lm 11W	**1256lm 16.25W**	1625lm 23.6W	1907lm 31.2W
3000K / 25°	904lm 11W	**1233lm 16.25W**	1596lm 23.6W	1874lm 31.2W
4000K / 25°	1053lm 11W	**1437lm 16.25W**	1860lm 23.6W	2187lm 31.2W

DRIVER	SEE DRIVER MATRIX
CONNECTED	***WHEN CONNECTED TO 1-10V DRIVER**
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10203005	BASE FLANGE Ø90 H3 - ALU
10203009	BASE FLANGE Ø90 H3 - WHITE STRUC
10203032	BASE FLANGE Ø90 H3 - BLACK STRUC
10204005	BASE FLANGE TUBE Ø90 H20 - ALU
10204009	BASE FLANGE TUBE Ø90 H20 - WHITE STRUC
10204032	BASE FLANGE TUBE Ø90 H20 - BLACK STRUC

ECO LED GE

Nomad 111 4x LED GE





4X LED ARRAY INCL. 16.25W

! 3500K ON REQUEST
! BASE FLANGE OPTIONAL

	2700K / CRI90+			3000K / CRI90+			4000K / CRI90+		
	15°	25°	40°	15°	25°	40°	15°	25°	40°
alu	12024005	12024105	12024205	12024305	12024405	12024505	12024605	12024705	12024805
black	12024002	12024102	12024202	12024302	12024402	12024502	12024602	12024702	12024802
white struc	12024009	12024109	12024209	12024309	12024409	12024509	12024609	12024709	12024809

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc - values per lamp module)

	350mA	**500mA**	700mA	900mA
2700K / 25°	920lm 11W	**1256lm 16.25W**	1625lm 23.6W	1907lm 31.2W
3000K / 25°	904lm 11W	**1233lm 16.25W**	1596lm 23.6W	1874lm 31.2W
4000K / 25°	1053lm 11W	**1437lm 16.25W**	1860lm 23.6W	2187lm 31.2W

DRIVER	SEE DRIVER MATRIX
CONNECTED	***WHEN CONNECTED TO 1-10V DRIVER**
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10203005	BASE FLANGE Ø90 H3 - ALU
10203009	BASE FLANGE Ø90 H3 - WHITE STRUC
10203032	BASE FLANGE Ø90 H3 - BLACK STRUC
10204005	BASE FLANGE TUBE Ø90 H20 - ALU
10204009	BASE FLANGE TUBE Ø90 H20 - WHITE STRUC
10204032	BASE FLANGE TUBE Ø90 H20 - BLACK STRUC

Nomad

HALOGEN 230V

Nomad 2x GU10





2X QPAR 16-20 | GU10 | 50-75W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP
! BASE FLANGE OPTIONAL

230V | R | IP20 | GWT 960° | 0.64KG

alu	**10202105**
black	**10202102**

CONNECTED	
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10203005	BASE FLANGE Ø90 H3 - ALU
10203009	BASE FLANGE Ø90 H3 - WHITE STRUC
10203032	BASE FLANGE Ø90 H3 - BLACK STRUC
10204005	BASE FLANGE TUBE Ø90 H20 - ALU
10204009	BASE FLANGE TUBE Ø90 H20 - WHITE STRUC
10204032	BASE FLANGE TUBE Ø90 H20 - BLACK STRUC

HALOGEN 230V

Nomad 4x GU10



4X QPAR 16-20 | GU10 | 50-75W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP
! BASE FLANGE OPTIONAL

230V | R | IP20 | GWT 960° | 1.02KG

alu	**10202205**
black	**10202202**

CONNECTED	
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10203005	BASE FLANGE Ø90 H3 - ALU
10203009	BASE FLANGE Ø90 H3 - WHITE STRUC
10203032	BASE FLANGE Ø90 H3 - BLACK STRUC
10204005	BASE FLANGE TUBE Ø90 H20 - ALU
10204009	BASE FLANGE TUBE Ø90 H20 - WHITE STRUC
10204032	BASE FLANGE TUBE Ø90 H20 - BLACK STRUC

HALOGEN 230V

Nomad 2x PAR30





2X QPAR 30 | E27 | MAX. 75W

! BASE FLANGE OPTIONAL

230V | R | IP20 | GWT 960° | 1.07KG

alu	**10201505**
white struc	**10201509**

INSTALLATION	
10203005	BASE FLANGE Ø90 H3 - ALU
10203009	BASE FLANGE Ø90 H3 - WHITE STRUC
10203032	BASE FLANGE Ø90 H3 - BLACK STRUC
10204005	BASE FLANGE TUBE Ø90 H20 - ALU
10204009	BASE FLANGE TUBE Ø90 H20 - WHITE STRUC
10204032	BASE FLANGE TUBE Ø90 H20 - BLACK STRUC

HALOGEN 230V

Nomad 4x PAR30



4X QPAR 30 | E27 | MAX. 75W

! BASE FLANGE OPTIONAL

230V | R | IP20 | GWT 960° | 2.09KG

alu	**10201605**
white struc	**10201609**

INSTALLATION	
10203005	BASE FLANGE Ø90 H3 - ALU
10203009	BASE FLANGE Ø90 H3 - WHITE STRUC
10203032	BASE FLANGE Ø90 H3 - BLACK STRUC
10204005	BASE FLANGE TUBE Ø90 H20 - ALU
10204009	BASE FLANGE TUBE Ø90 H20 - WHITE STRUC
10204032	BASE FLANGE TUBE Ø90 H20 - BLACK STRUC

Nomad

HALOGEN 12V | GE

Nomad 2x AR111 GE



2X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111
! BASE FLANGE OPTIONAL

III | 12V | IP20 | GWT 960° | 0.78KG

alu	**10200905**
black	**10200902**
white struc	**10200909**

M-LED SEE LEFT PAGE

INSTALLATION

10203005	BASE FLANGE Ø90 H3 - ALU
10203009	BASE FLANGE Ø90 H3 - WHITE STRUC
10203032	BASE FLANGE Ø90 H3 - BLACK STRUC
10204005	BASE FLANGE TUBE Ø90 H20 - ALU
10204009	BASE FLANGE TUBE Ø90 H20 - WHITE STRUC
10204032	BASE FLANGE TUBE Ø90 H20 - BLACK STRUC

HALOGEN 12V | GE

Nomad 4x AR111 GE





4X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111
! BASE FLANGE OPTIONAL

III | 12V | IP20 | GWT 960° | 1.24KG

alu	**10201005**
black	**10201002**
white struc	**10201009**

M-LED SEE BELOW

INSTALLATION

10203005	BASE FLANGE Ø90 H3 - ALU
10203009	BASE FLANGE Ø90 H3 - WHITE STRUC
10203032	BASE FLANGE Ø90 H3 - BLACK STRUC
10204005	BASE FLANGE TUBE Ø90 H20 - ALU
10204009	BASE FLANGE TUBE Ø90 H20 - WHITE STRUC
10204032	BASE FLANGE TUBE Ø90 H20 - BLACK STRUC

M-LED SEE PAGES 138-141 FOR MORE INFO

11298002	M-LED 111 2700K 15° GE BLACK MATT	**11298302**	M-LED 111 3000K 15° GE BLACK MATT	**11298602**	M-LED 111 4000K 15° GE BLACK MATT
11298009	M-LED 111 2700K 15° GE WHITE STRUC	**11298309**	M-LED 111 3000K 15° GE WHITE STRUC	**11298609**	M-LED 111 4000K 15° GE WHITE STRUC
11298024	M-LED 111 2700K 15° GE BRUSHED ALU	**11298324**	M-LED 111 3000K 15° GE BRUSHED ALU	**11298624**	M-LED 111 4000K 15° GE BRUSHED ALU
11298102	M-LED 111 2700K 25° GE BLACK MATT	**11298402**	M-LED 111 3000K 25° GE BLACK MATT	**11298702**	M-LED 111 4000K 25° GE BLACK MATT
11298109	M-LED 111 2700K 25° GE WHITE STRUC	**11298409**	M-LED 111 3000K 25° GE WHITE STRUC	**11298709**	M-LED 111 4000K 25° GE WHITE STRUC
11298124	M-LED 111 2700K 25° GE BRUSHED ALU	**11298424**	M-LED 111 3000K 25° GE BRUSHED ALU	**11298724**	M-LED 111 4000K 25° GE BRUSHED ALU
11298202	M-LED 111 2700K 40° GE BLACK MATT	**11298502**	M-LED 111 3000K 40° GE BLACK MATT	**11298802**	M-LED 111 4000K 40° GE BLACK MATT
11298209	M-LED 111 2700K 40° GE WHITE STRUC	**11298509**	M-LED 111 3000K 40° GE WHITE STRUC	**11298809**	M-LED 111 4000K 40° GE WHITE STRUC
11298224	M-LED 111 2700K 40° GE BRUSHED ALU	**11298524**	M-LED 111 3000K 40° GE BRUSHED ALU	**11298824**	M-LED 111 4000K 40° GE BRUSHED ALU

HALOGEN 12V | GI

Nomad 2x AR111 GI

230V | R,L,C | IP20 | GWT 960° | 1.31KG



UNIVERSALLY DIMMABLE	
alu	**10201105**
black	**10201102**
white struc	**10201109**

INSTALLATION	
10203005	BASE FLANGE Ø90 H3 - ALU
10203009	BASE FLANGE Ø90 H3 - WHITE STRUC
10203032	BASE FLANGE Ø90 H3 - BLACK STRUC
10204005	BASE FLANGE TUBE Ø90 H20 - ALU
10204009	BASE FLANGE TUBE Ø90 H20 - WHITE STRUC
10204032	BASE FLANGE TUBE Ø90 H20 - BLACK STRUC

2X QR-LP 111 | G53 | MAX. 50W

! BASE FLANGE OPTIONAL

HALOGEN 12V | GI

Nomad 4x AR111 GI

230V | R,L,C | IP20 | GWT 960° | 2.17KG



UNIVERSALLY DIMMABLE	
alu	**10201305**
black	**10201302**
white struc	**10201309**

INSTALLATION	
10203005	BASE FLANGE Ø90 H3 - ALU
10203009	BASE FLANGE Ø90 H3 - WHITE STRUC
10203032	BASE FLANGE Ø90 H3 - BLACK STRUC
10204005	BASE FLANGE TUBE Ø90 H20 - ALU
10204009	BASE FLANGE TUBE Ø90 H20 - WHITE STRUC
10204032	BASE FLANGE TUBE Ø90 H20 - BLACK STRUC

4X QR-LP 111 | G53 | MAX. 50W

! BASE FLANGE OPTIONAL

HALOGEN 12V | GI

Nomad XYZ 4x AR111 2xGI

230V | R,L,C | IP20 | GWT 960° | 2.21KG





UNIVERSALLY DIMMABLE	
alu	**10202505**

INSTALLATION	
10202410	NOMAD XYZ-ARM 1400MM NICKEL (H 160° V -15°/+15°)
10203005	BASE FLANGE Ø90 H3 - ALU
10203009	BASE FLANGE Ø90 H3 - WHITE STRUC
10203032	BASE FLANGE Ø90 H3 - BLACK STRUC
10204005	BASE FLANGE TUBE Ø90 H20 - ALU
10204009	BASE FLANGE TUBE Ø90 H20 - WHITE STRUC
10204032	BASE FLANGE TUBE Ø90 H20 - BLACK STRUC

4X QR-LP 111 | G53 | MAX. 50W

! BASE FLANGE OPTIONAL

Nomad

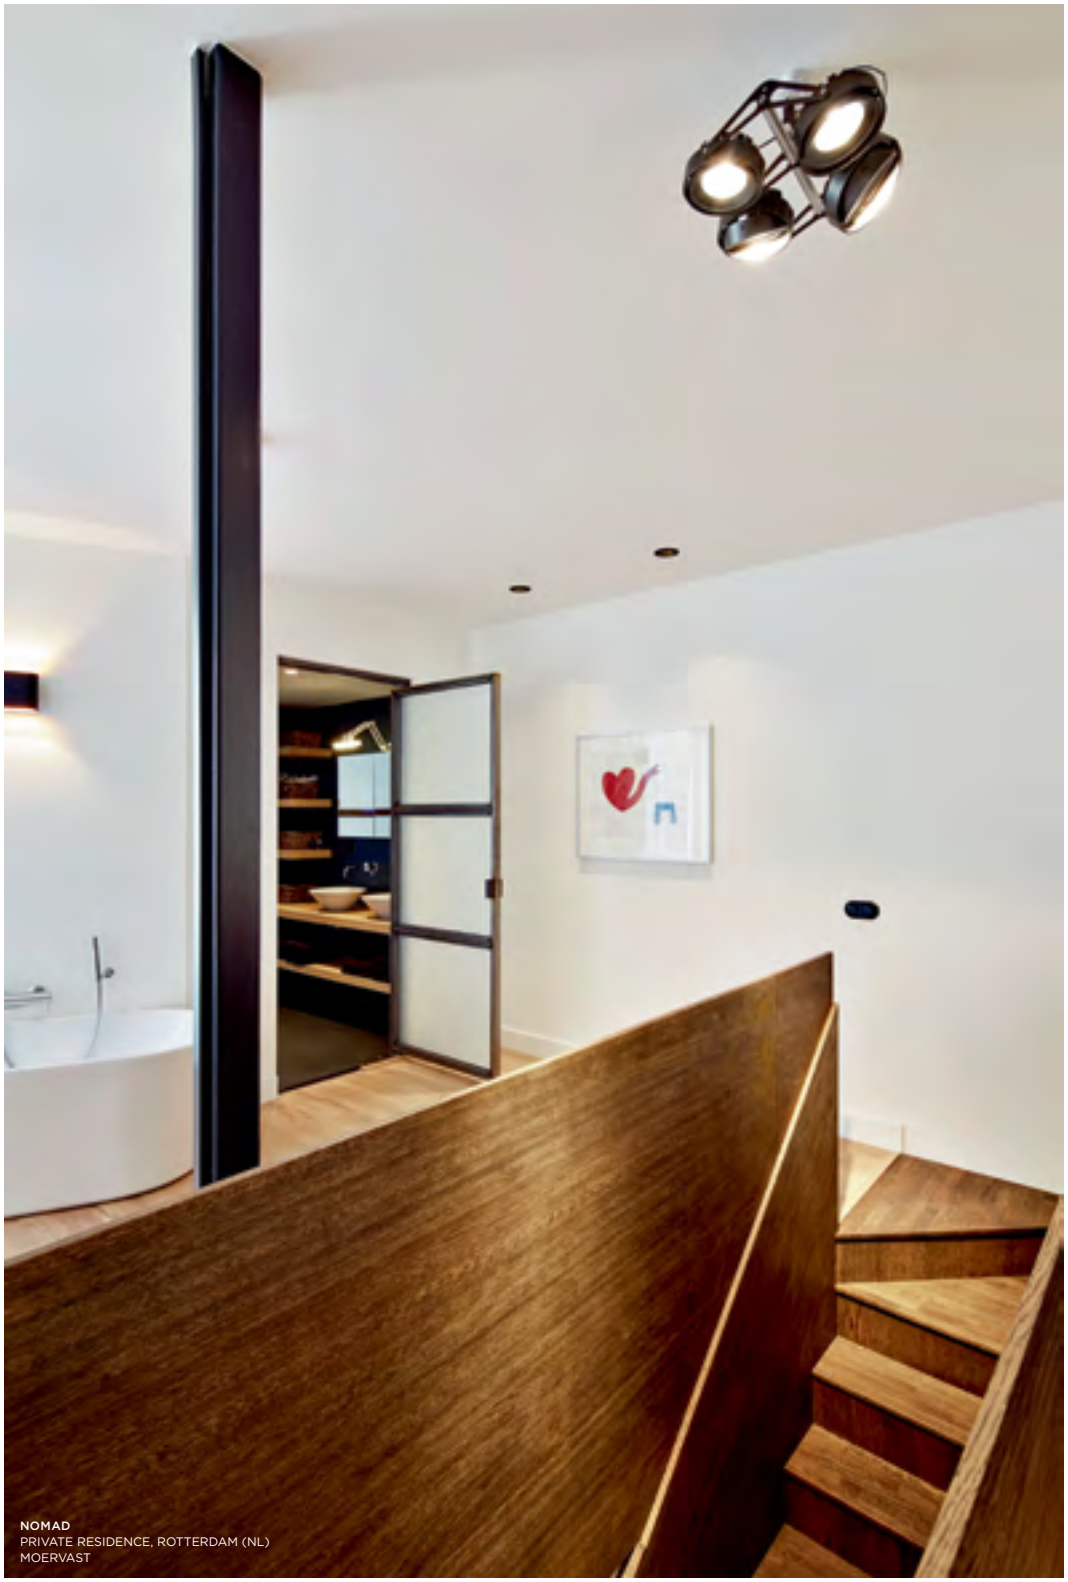

NOMAD
PRIVATE RESIDENCE, ROTTERDAM (NL)
MOERVAST

NOMAD
KONINKLIJKE HOCKEY CLUB, LEUVEN (BE)
ARCHITEAM

see also:

p. 420

Nomad minimal

Our classic Nomad is an example of lighting at its most refined and versatile. If you wish to make the 'industrial look' a little more homely, simply choose Nomad minimal and enhance the luminaire with a shade.

SUPERMODULAR.COM/EN/NOMAD-MINIMAL

HALOGEN

Nomad minimal tall E27



1X A 60 | E27 | MAX. 70W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN E27 LAMP

! NOMAD MINIMAL/ANIMAL SHADE OPTIONAL
! DISK OPTIONAL

230V | R | IP20 | GWT 960° | 0.50KG

alu	10203505

CONNECTED	
70000611	PHILIPS HUE WARM WHITE E27 BULB 9.5W
70000620	PHILIPS HUE TUNABLE WHITE E27 BULB 9.5W
70000612	PHILIPS HUE RGBW E27 BULB 9W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

ACCESSORIES	
10203605	NOMAD MINIMAL E27 DISK ALU
10203801	MINIMAL SHADE - MEDIUM (Ø200) - WHITE
10203802	MINIMAL SHADE - MEDIUM (Ø200) - BLACK
10203813	MINIMAL SHADE - MEDIUM (Ø200) - RED
10203901	MINIMAL SHADE - LARGE (Ø250) - WHITE
10203902	MINIMAL SHADE - LARGE (Ø250) - BLACK
10203913	MINIMAL SHADE - LARGE (Ø250) - RED
10203920	ANIMAL SHADE - LARGE (Ø250) - SNAKE BLACK/GOLD
10203921	ANIMAL SHADE - LARGE (Ø250) - SNAKE BROWN/GOLD
10203924	ANIMAL SHADE - LARGE (Ø250) - ZEBRA/WHITE

SHADE WHITE

SHADE BLACK

SHADE RED

SHADE BLACK / GOLD

ANIMAL SHADE
SNAKE BLACK / GOLD

ANIMAL SHADE
SNAKE BROWN / GOLD

ANIMAL SHADE ZEBRA


MINIMAL DISK

Rektor

Rektor will guide the way around your space. Rektor is a surprising fixture, as it is highly directional despite the super-sleek housing. This makes it a perfect example of accent lighting. Its extensive adjustability and metal colour accent on the housing make it a genuine must-have. Rektor is very versatile, as it can also be mounted on the MP78 light line. Rektor recessed is nothing more, but also nothing less, than a highly adjustable ceiling spotlight.

design in cooperation with couvreur-devos

HIDDEN INGENUITY

Rektor was designed by Couvreur & Devos, who also developed other acclaimed Modular fixtures such as Scotty, Spock and United. Just like Spock, the unique feature of Rektor is that all the technical workings are concealed within the fixture. The innovative tilting technology allows you to rotate the bulb holder through 360°, as well as adjusting it upwards or downwards through 90°. All without a single wire being visible.

METAL FINISHES

Metal finishes and colour integration provide much-needed variety in an interior. The latest trends are finished metal colours and textures. For Rektor, Modular has introduced a new colour to its portfolio: smoked bronze. This gives Rektor a stylish two-tone look. The bulb holder always has a white or black structure and the accent is found on the gear housing. You can choose from white structure, brushed aluminium, chrome or smoked bronze.

CHANGING INTERIORS

Its sleek lines allow you to create symbolic lines of light on the ceiling. It can be mounted on the ceiling and also makes an excellent wall fitting. Rektor is therefore perfect for use as a downlighter or for highlighting the wall or a specific object. Rektor also demands creative input from the specifier. Turning the fixture through 90° will create a totally new look through the use of the specific metal finish.

SUPERMODULAR.COM/EN/REKTOR

ECO LED GI

Rektor LED GI



1X LED ARRAY INCL. 16W

Friends of hue | 230V | IP20 | GWT 960° | 1.38KG

NOT DIMMABLE	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc - brushed alu	12820062	12820162	12823062	12823162
black struc - chrome	12820064	12820164	12823064	12823164
black struc - smoked bronze	12820067	12820167	12823067	12823167
white struc - brushed alu	12820061	12820161	12823061	12823161
white struc - chrome	12820063	12820163	12823063	12823163
white struc - smoked bronze	12820066	12820166	12823066	12823166
white struc - white struc	12820009	12820109	12823009	12823109

TRAILING EDGE DIMMABLE	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc - brushed alu	12826062	12826162	12828062	12828162
black struc - chrome	12826064	12826164	12828064	12828164
black struc - smoked bronze	12826067	12826167	12828067	12828167
white struc - brushed alu	12826061	12826161	12828061	12828161
white struc - chrome	12826063	12826163	12828063	12828163
white struc - smoked bronze	12826066	12826166	12828066	12828166
white struc - white struc	12826009	12826109	12828009	12828109

1-10V*/PUSHDIM	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc - brushed alu	12825062	12825162	12827062	12827162
black struc - chrome	12825064	12825164	12827064	12827164
black struc - smoked bronze	12825067	12825167	12827067	12827167
white struc - brushed alu	12825061	12825161	12827061	12827161
white struc - chrome	12825063	12825163	12827063	12827163
white struc - smoked bronze	12825066	12825166	12827066	12827166
white struc - white struc	12825009	12825109	12827009	12827109

LUMINAIRE OUTPUT & POWER CONSUMPTION

(25° white struc - brushed alu)

2700K / 25°	**1257lm 16W**
3000K / 25°	**1233lm 16W**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

PRIVATE RESIDENCE, ROESELARE (BE)

ECO LED GE

Rektor recessed LED GE

1X LED ARRAY INCL. 16.25W



500mA IP20 GWT 960° 0.74KG

	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	**12821032**	**12821132**	**12822032**	**12822132**
white struc	**12821009**	**12821109**	**12822009**	**12822109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	**500mA**
2700K / 25°	916lm 11W	**1257lm 16.25W**
3000K / 25°	900lm 11W	**1234lm 16.25W**

DRIVER	SEE DRIVER MATRIX

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10490330	CONBOX 112X172X100X236
12291330	GYPKIT 170X112 - Ø65

Rektor

REKTOR BLACK STRUC - BRUSHED ALU

REKTOR BLACK STRUC - CHROME

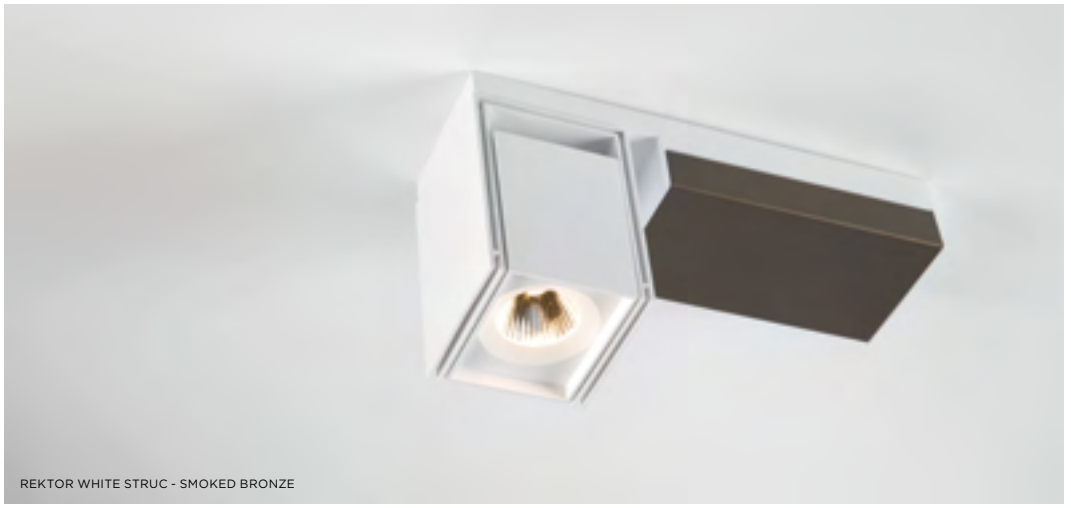

REKTOR WHITE STRUC - SMOKED BRONZE

REKTOR
PRIVATE RESIDENCE, AMSTERDAM (NL)

Rektor

REKTOR
HAVN, ANTWERPEN (BE)
.MAX INTERIEURARCHITECTEN

REKTOR
PRIVATE RESIDENCE (NL)

REKTOR
BROUWERIJ DEKONINCK, ANTWERPEN (BE)

Scotty

Anyone who mentions Scotty, will immediately think of the catchphrase 'Beam me up'. This fitting certainly lives up to its name: the powerful beam of LED light simply reels you in to admire the architectural design. The light shines straight downwards, which prevents it from shining directly into your eyes. The LED disc offers full 360° rotation and can also be angled vertically up to 60° within its chalice-shaped cocoon. As a result of its refined design, Scotty will blend seamlessly with the rest of your interior. Don't forget to discover its travel companions Kurk and Spock.

design in cooperation with couvreur-devos

SUPERMODULAR.COM/EN/SCOTTY

ECO LED GE

Scotty 270 LED GE





1X LED DISC INCL.

! FOR TRIMLESS INSTALLATION: MUST BE USED WITH RECESSED RING

	2700K / CRI80		3000K / CRI80	
	30°	55°	30°	55°
black struc	**11790432**	**11790532**	**11790032**	**11790132**
white struc	**11790409**	**11790509**	**11790009**	**11790109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(30° white struc)

	350mA	**500mA**
2700K / 30°	977lm 14.2W	**1258lm 21W**
3000K / 30°	1026lm 14.2W	**1321lm 21W**

DRIVER	SEE DRIVER MATRIX
CONNECTED	***WHEN CONNECTED TO 1-10V DRIVER**
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR
INSTALLATION	
11799530	CONBOX 375X335X111 PLASTER FINISH TRIMLESS
11799730	CONBOX 375X335X125 CONCRETE FINISH TRIMLESS
11799430	RECESSED RING Ø288 H125

ECO LED GE

Scotty 270 adjustable LED GE



1X LED DISC INCL.

! FOR TRIMLESS INSTALLATION: MUST BE USED WITH RECESSED RING

	2700K / CRI80		3000K / CRI80	
	30°	55°	30°	55°
black struc	**11793432**	**11793532**	**11793032**	**11793132**
white struc	**11793409**	**11793509**	**11793009**	**11793109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(30° white struc)

	350mA
2700K / 30°	**977lm 14.2W**
3000K / 30°	**1026lm 14.2W**

DRIVER	SEE DRIVER MATRIX
CONNECTED	***WHEN CONNECTED TO 1-10V DRIVER**
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR
INSTALLATION	
11799530	CONBOX 375X335X111 PLASTER FINISH TRIMLESS
11799730	CONBOX 375X335X125 CONCRETE FINISH TRIMLESS
11799430	RECESSED RING Ø288 H125

Scotty

SCOTTY
TRESORS DE CHAMPAGNE, REIMS (FR)
CARLOS DESIGNER

SCOTTY
INGENIUM, BRUGGE (BE)
ARCHITECTEN GROEP III

Semih

Just like in the yin-yang symbol, an S-shaped line divides Semih into two equal, yet opposite, sections: the hard, solid part mounted to the ceiling and the soft, round lamp housing, which can be easily pointed in the direction of specific objects or places. Adding a sense of softness and style to any interior, Semih is exceptionally easy to install, thanks to strong mounting magnets.

FLEXIBILITY PAR EXCELLENCE

Today's interiors are places where people work, relax and enjoy. To cater to all these different functions, interior architects prefer to keep spaces multifunctional and flexible. Semih was designed especially with this philosophy in mind: the rotating lamp housing with a choice of 3 types of reflectors can cast accent, task-related or ambient lighting wherever it is needed.

VERSATILE LIGHT SOURCE

Semih is made of two identical parts, divided by a mere 2mm S-line. With the part mounted to the ceiling rotating by 360° around its axis and the lamp housing by 75° (in both directions), Semih is a very versatile lighting fixture, which can be used in any situation. Semih features a powerful, dimmable and energy-efficient LED source.

INSTALLATION MADE EASY

Installing Semih is a breeze, as it requires hardly any screws. Just mount the ceiling panel to the ceiling and let the powerful magnets do their job. The reflectors, too, are clicked on a magnetic inner panel, which facilitates replacement.Moreover, as all the gear is integrated into the fixture, Semih can be smoothly connected to a 230 Volt standard wiring during renovation works.

SUPERMODULAR.COM/EN/SEMIH

ECO LED GI

Semih LED GI



1X LED ARRAY INCL. 16.2W

! 3500K & 4000K ON REQUEST

LEADING/TRAILING EDGE DIMMABLE	2700K / CRI90+			3000K / CRI90+		
	15°	25°	40°	15°	25°	40°
black struc	**13180032**	**13180132**	**13180232**	**13180332**	**13180432**	**13180532**
white struc	**13180009**	**13180109**	**13180209**	**13180309**	**13180409**	**13180509**

DALI	2700K / CRI90+			3000K / CRI90+		
	15°	25°	40°	15°	25°	40°
black struc	**13182032**	**13182132**	**13182232**	**13182332**	**13182432**	**13182532**
white struc	**13182009**	**13182109**	**13182209**	**13182309**	**13182409**	**13182509**

1-10V*/PUSHDIM	2700K / CRI90+			3000K / CRI90+		
	15°	25°	40°	15°	25°	40°
black struc	**13181032**	**13181132**	**13181232**	**13181332**	**13181432**	**13181532**
white struc	**13181009**	**13181109**	**13181209**	**13181309**	**13181409**	**13181509**

LUMINAIRE OUTPUT & POWER CONSUMPTION

(25° white struc)

2700K / 25°	**1448lm 19W**
3000K / 25°	**1520lm 19W**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

Semih

SEMIH
PRIVATE RESIDENCE, KORTRIJK (BE)

SEMIH
ZIN, HASSELT (BE)
LOFT22 ARCHITECTURE

Semih

SEMIH

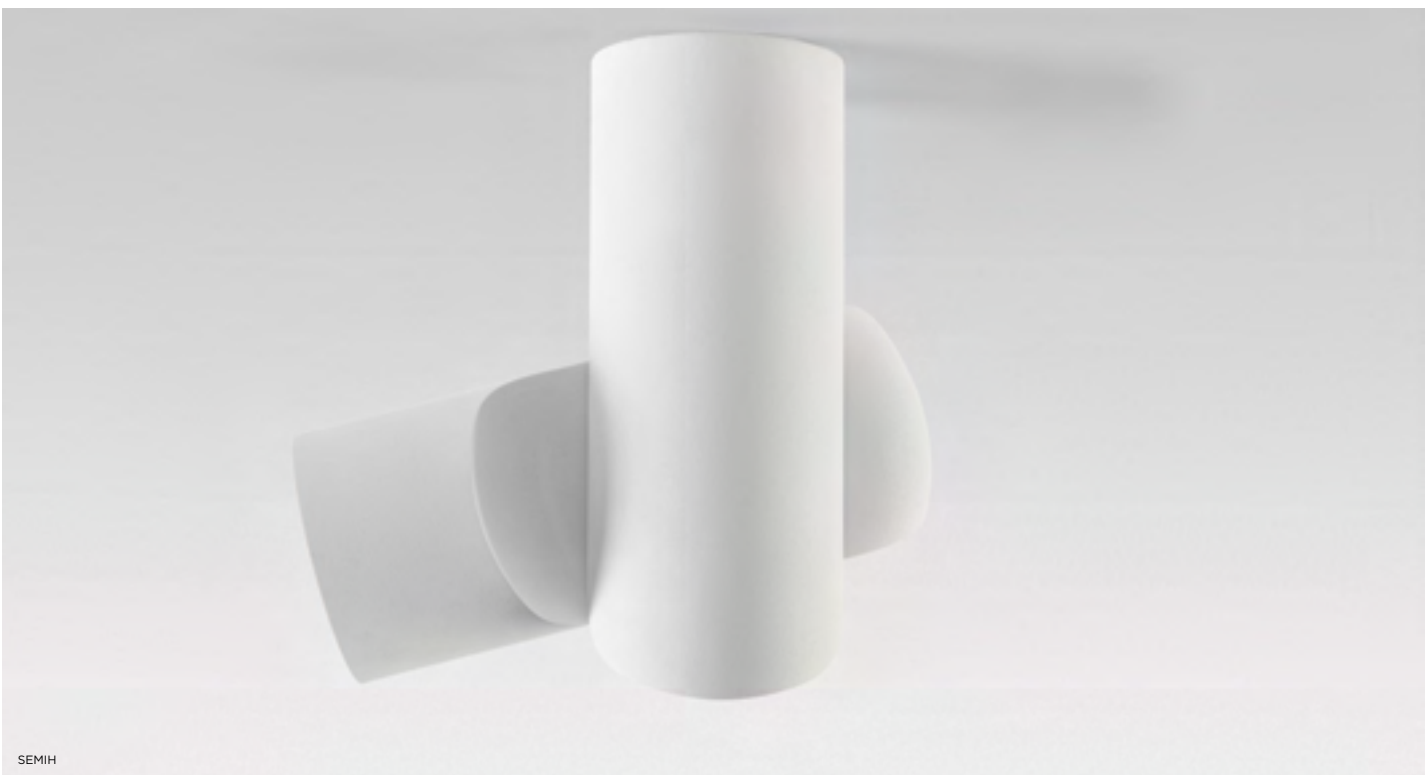

SEMIH

SEMIH
PRIVATE RESIDENCE, KNOKKE (BE)

Single round

Playing on square-angled and round shapes, Single round combines the best of both worlds. The M-LED 111 module fits well in an aluminium cylinder. The single connection with the hinge contributes to a highly directional fixture. A great solution for use in specific retail projects thanks to the high performance and energy-efficient LED engine.

SUPERMODULAR.COM/EN/SINGLE-ROUND

ECO LED GI

Single round LED GI



230V | IP20 | GWT 960° | 1.77KG

1X LED ARRAY INCL. | 25W

! 3500K ON REQUEST

TRAILING EDGE DIMMABLE	2700K / CRI90+			3000K / CRI90+			4000K / CRI90+		
	15°	25°	40°	15°	25°	40°	15°	25°	40°
black struc	**13031032**	**13031332**	**13031632**	**13031132**	**13031432**	**13031732**	**13031232**	**13031532**	**13031832**
white struc	**13031009**	**13031309**	**13031609**	**13031109**	**13031409**	**13031709**	**13031209**	**13031509**	**13031809**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

2700K / 25°	**1913lm 28.5W**
3000K / 25°	**1982lm 28.5W**
4000K / 25°	**2143lm 28.5W**

TRACK SEE BELOW

TRACK FOR ADDITIONAL TRACK COMPONENTS SEE GOODIES

11240101	TRACK PROFILE SURFACE 2M SHINY WHITE	**11240601**	TRACK POWER FEED SURFACE LEFT SHINY WHITE	**11241701**	TRACK POWER FEED RECESSED LEFT SHINY WHITE
11240102	TRACK PROFILE SURFACE 2M BLACK	**11240602**	TRACK POWER FEED SURFACE LEFT BLACK	**11241702**	TRACK POWER FEED RECESSED LEFT BLACK
11240105	TRACK PROFILE SURFACE 2M ALU	**11240605**	TRACK POWER FEED SURFACE LEFT ALU	**11241705**	TRACK POWER FEED RECESSED LEFT ALU
11240301	TRACK PROFILE RECESSED 2M SHINY WHITE	**11241401**	TRACK COVER ENDPLATE SHINY WHITE	**11242201**	TRACK PROFILE SURFACE 1M SHINY WHITE
11240302	TRACK PROFILE RECESSED 2M BLACK	**11241402**	TRACK COVER ENDPLATE BLACK	**11242202**	TRACK PROFILE SURFACE 1M BLACK
11240305	TRACK PROFILE RECESSED 2M ALU	**11241405**	TRACK COVER ENDPLATE ALU	**11242205**	TRACK PROFILE SURFACE 1M ALU
11240501	TRACK POWER FEED SURFACE RIGHT SHINY WHITE	**11241601**	TRACK POWER FEED RECESSED RIGHT SHINY WHITE	**11242401**	TRACK PROFILE RECESSED 1M SHINY WHITE
11240502	TRACK POWER FEED SURFACE RIGHT BLACK	**11241602**	TRACK POWER FEED RECESSED RIGHT BLACK	**11242402**	TRACK PROFILE RECESSED 1M BLACK
11240505	TRACK POWER FEED SURFACE RIGHT ALU	**11241605**	TRACK POWER FEED RECESSED RIGHT ALU	**11242405**	TRACK PROFILE RECESSED 1M ALU

Single round

SINGLE ROUND
APOTHEEK, DEERLIJK (BE)
WILLEM BENOIT INTERIEUR

SINGLE ROUND
CLUBHOUSE, TILBURG (NL)
ZOUT ONTWERPHUIS, JEFF VAN RIEL

Single round

SINGLE ROUND
ROB PEETOOM HAIR + MAKE-UP, AMSTERDAM (NL)
RUUD VAN OOSTERHOUT DESIGN

Single square

Single square likes to show off with its discreet hinge points and square corners. The built-in hinging mechanism makes this fixture a versatile and highly directional spotlight, which is installed using the Modular rail system. Following the integration of the M-LED 111 and the relevant LED gear, Single square has become a highly efficient, ideal spotlight for retail projects.

SUPERMODULAR.COM/EN/SINGLE-SQUARE

ECO LED GI

Single square LED GI



230V | IP20 | GWT 960° | 1.57KG

TRAILING EDGE DIMMABLE	2700K / CRI90+			3000K / CRI90+			4000K / CRI90+		
	15°	25°	40°	15°	25°	40°	15°	25°	40°
black struc	11402032	11402332	11402632	11402132	11402432	11402732	11402232	11402532	11402832
white struc	11402009	11402309	11402609	11402109	11402409	11402709	11402209	11402509	11402809

1X LED ARRAY INCL. | 25W

! 3500K ON REQUEST

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

2700K / 25°	**1913lm 28.5W**
3000K / 25°	**1982lm 28.5W**
4000K / 25°	**2143lm 28.5W**

TRACK SEE BELOW

HALOGEN 12V GI

Single square AR111 GI



230V | R,L,C | IP20 | GWT 960° | 1.10KG

UNIVERSALLY DIMMABLE	
black struc	11400032
white struc	11400009

TRACK SEE BELOW

1X QR-LP 111 | G53 | MAX. 100W

TRACK FOR ADDITIONAL TRACK COMPONENTS SEE GOODIES

11240101	TRACK PROFILE SURFACE 2M SHINY WHITE	**11240601**	TRACK POWER FEED SURFACE LEFT SHINY WHITE	**11241701**	TRACK POWER FEED RECESSED LEFT SHINY WHITE
11240102	TRACK PROFILE SURFACE 2M BLACK	**11240602**	TRACK POWER FEED SURFACE LEFT BLACK	**11241702**	TRACK POWER FEED RECESSED LEFT BLACK
11240105	TRACK PROFILE SURFACE 2M ALU	**11240605**	TRACK POWER FEED SURFACE LEFT ALU	**11241705**	TRACK POWER FEED RECESSED LEFT ALU
11240301	TRACK PROFILE RECESSED 2M SHINY WHITE	**11241401**	TRACK COVER ENDPLATE SHINY WHITE	**11242201**	TRACK PROFILE SURFACE 1M SHINY WHITE
11240302	TRACK PROFILE RECESSED 2M BLACK	**11241402**	TRACK COVER ENDPLATE BLACK	**11242202**	TRACK PROFILE SURFACE 1M BLACK
11240305	TRACK PROFILE RECESSED 2M ALU	**11241405**	TRACK COVER ENDPLATE ALU	**11242205**	TRACK PROFILE SURFACE 1M ALU
11240501	TRACK POWER FEED SURFACE RIGHT SHINY WHITE	**11241601**	TRACK POWER FEED RECESSED RIGHT SHINY WHITE	**11242401**	TRACK PROFILE RECESSED 1M SHINY WHITE
11240502	TRACK POWER FEED SURFACE RIGHT BLACK	**11241602**	TRACK POWER FEED RECESSED RIGHT BLACK	**11242402**	TRACK PROFILE RECESSED 1M BLACK
11240505	TRACK POWER FEED SURFACE RIGHT ALU	**11241605**	TRACK POWER FEED RECESSED RIGHT ALU	**11242405**	TRACK PROFILE RECESSED 1M ALU

Single square

ECO DISCHARGE GI

Single square CDM-TC 35W GI



1X HIT-TC -CE G8.5 35W

! ALWAYS USE WITH OPTIONAL REFLECTOR

230V IP20 GWT 960° 1.20KG

black struc	**11400132**
white struc	**11400109**

TRACK SEE BELOW

OPTICAL	
10211013	COLOR FILTER Ø110 RED
10211014	COLOR FILTER Ø110 YELLOW
10211015	COLOR FILTER Ø110 GREEN
10211016	COLOR FILTER Ø110 BLUE
10211102	SPREADLENS Ø110
10213303	SOFTLENS Ø110
10210802	HONEYCOMB Ø110
10214530	REFLECTOR Ø110 SPOT
10214630	REFLECTOR Ø110 MEDIUM
10214730	REFLECTOR Ø110 FLOOD

ECO DISCHARGE GI

Single square CDM-TC 70W GI



1X HIT-TC -CE G8.5 70W

! ALWAYS USE WITH OPTIONAL REFLECTOR

230V IP20 GWT 960° 1.20KG

black struc	**11400232**
white struc	**11400209**

TRACK SEE BELOW

OPTICAL	
10211013	COLOR FILTER Ø110 RED
10211014	COLOR FILTER Ø110 YELLOW
10211015	COLOR FILTER Ø110 GREEN
10211016	COLOR FILTER Ø110 BLUE
10211102	SPREADLENS Ø110
10213303	SOFTLENS Ø110
10210802	HONEYCOMB Ø110
10214530	REFLECTOR Ø110 SPOT
10214630	REFLECTOR Ø110 MEDIUM
10214730	REFLECTOR Ø110 FLOOD

TRACK FOR ADDITIONAL TRACK COMPONENTS SEE GOODIES

11240101	TRACK PROFILE SURFACE 2M SHINY WHITE	**11240601**	TRACK POWER FEED SURFACE LEFT SHINY WHITE	**11241701**	TRACK POWER FEED RECESSED LEFT SHINY WHITE
11240102	TRACK PROFILE SURFACE 2M BLACK	**11240602**	TRACK POWER FEED SURFACE LEFT BLACK	**11241702**	TRACK POWER FEED RECESSED LEFT BLACK
11240105	TRACK PROFILE SURFACE 2M ALU	**11240605**	TRACK POWER FEED SURFACE LEFT ALU	**11241705**	TRACK POWER FEED RECESSED LEFT ALU
11240301	TRACK PROFILE RECESSED 2M SHINY WHITE	**11241401**	TRACK COVER ENDPLATE SHINY WHITE	**11242201**	TRACK PROFILE SURFACE 1M SHINY WHITE
11240302	TRACK PROFILE RECESSED 2M BLACK	**11241402**	TRACK COVER ENDPLATE BLACK	**11242202**	TRACK PROFILE SURFACE 1M BLACK
11240305	TRACK PROFILE RECESSED 2M ALU	**11241405**	TRACK COVER ENDPLATE ALU	**11242205**	TRACK PROFILE SURFACE 1M ALU
11240501	TRACK POWER FEED SURFACE RIGHT SHINY WHITE	**11241601**	TRACK POWER FEED RECESSED RIGHT SHINY WHITE	**11242401**	TRACK PROFILE RECESSED 1M SHINY WHITE
11240502	TRACK POWER FEED SURFACE RIGHT BLACK	**11241602**	TRACK POWER FEED RECESSED RIGHT BLACK	**11242402**	TRACK PROFILE RECESSED 1M BLACK
11240505	TRACK POWER FEED SURFACE RIGHT ALU	**11241605**	TRACK POWER FEED RECESSED RIGHT ALU	**11242405**	TRACK PROFILE RECESSED 1M ALU

SINGLE SQUARE
DUCATI, PARIS (FR)

Single square

SINGLE SQUARE
BIT, EDE (NL)
QUUB INTERIOR CONCEPTS

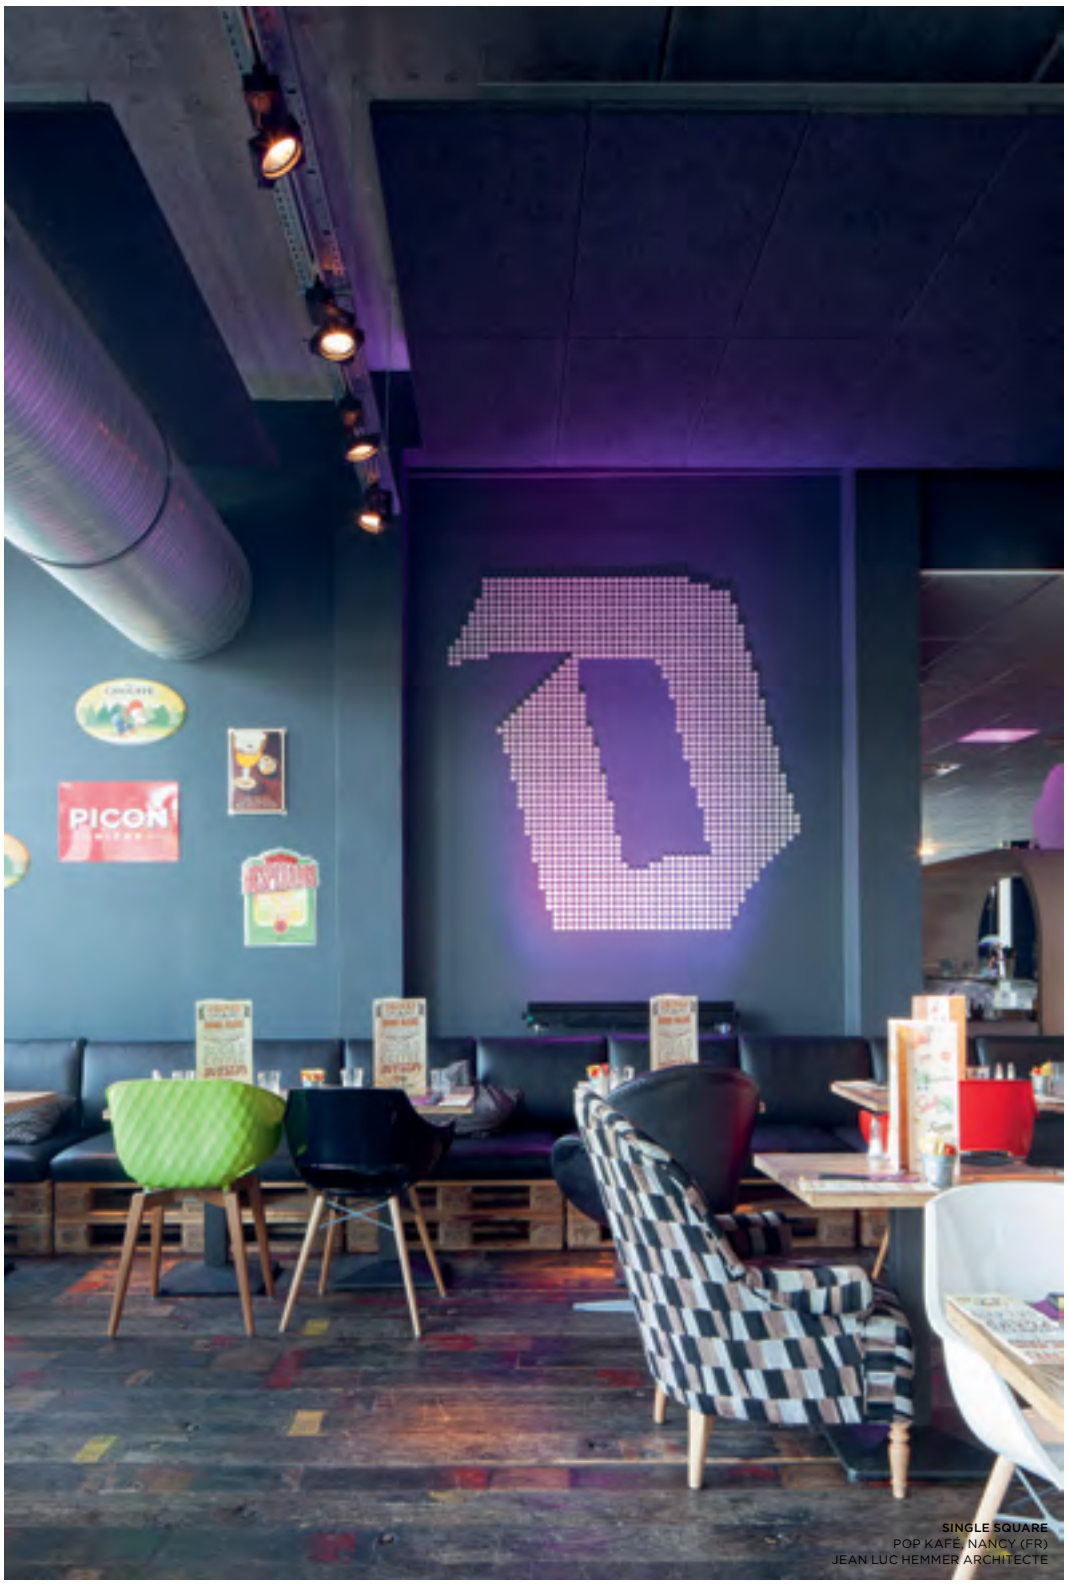

SINGLE SQUARE
POP KAFÉ, NANCY (FR)
JEAN LUC HEMMER ARCHITECTE

SL75

This is the ultimate functional lighting solution, combining superior efficiency and magnificent light output results. SL75 is a luminaire that comes in two lengths and can either be ceiling mounted or suspended. SL75 also includes a 'custom made' solution which guarantees you the exact sizes to fit into your setting. Get your creative juices flowing!

SUPERMODULAR.COM/EN/SL75

ECO FLUORESCENT GI

SL75 surface mounted TL5
continuous poly down GI (1192mm)



1X T16 G5 28/54W

230V GWT 960° 4.42KG

alu	93350010
white struc	93350012

ECO FLUORESCENT GI

SL75 suspended TL5
continuous poly down GI (1192mm)





1X T16 G5 28/54W

230V GWT 960° 4.42KG

alu	93350020
white struc	93350022

! INCL. POWER FEED KIT 2M (TRANSPARANT CABLE) & SUSPENSION SET

ECO FLUORESCENT GI

SL75 surface mounted TL5
continuous poly down GI (1968mm)



1X T16 G5 28/54W
1X T16 G5 21/39W

230V GWT 960° 7.30KG

alu	93352010
white struc	93352012

ECO FLUORESCENT GI

SL75 suspended TL5
continuous poly down GI (1968mm)



1X T16 G5 28/54W
1X T16 G5 21/39W

230V GWT 960° 7.30KG

alu	93352020
white struc	93352022

! INCL. POWER FEED KIT 2M (TRANSPARANT CABLE) & SUSPENSION SET

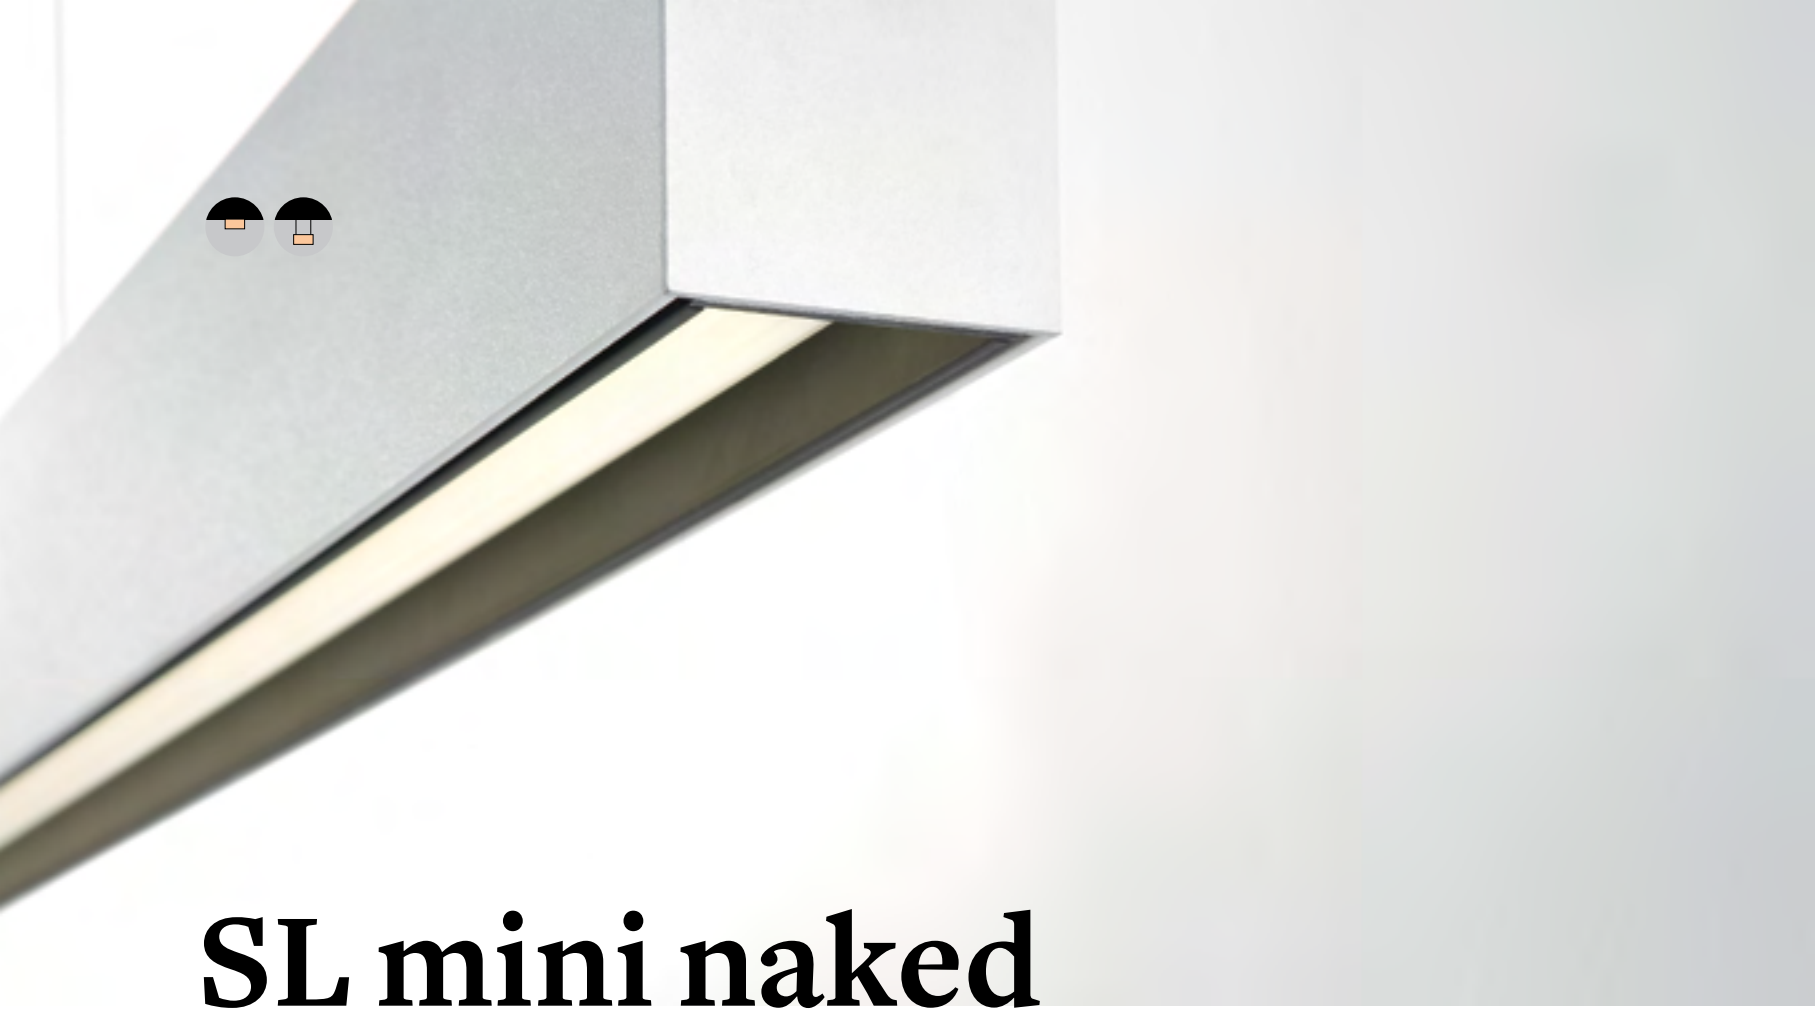

SL mini naked

SL mini naked differs from the rest of the SL mini family. The name says it all: the light sources, SLS lamp and/or LED spotlights are visible in a coloured U-shaped inner casing. SL mini naked is well appreciated for its sleekness and elegance in the space. Be creative with colours, lenghts, light sources and positioning. SL mini naked is available in fixed lengths, but is also customizable.

SUPERMODULAR.COM/EN/SL-MINI-NAKED

ECO FLUORESCENT GI

SL mini naked surface mounted TL5 SLS down GI (1207mm)





230V | GWT 960° | 2.80KG

black struc (gold interior)	**93430018**
black struc (white struc interior)	**93430016**
white struc (black struc interior)	**93430017**
white struc (gold interior)	**93430019**

1X T16 SLS | G5 | 28/54W

ECO FLUORESCENT GI

SL mini naked suspended TL5 SLS down GI (1207mm)



230V | GWT 960° | 2.80KG

black struc (gold interior)	**93430028**
black struc (white struc interior)	**93430026**
white struc (black struc interior)	**93430027**
white struc (gold interior)	**93430029**

1X T16 SLS | G5 | 28/54W

! INCL. POWER FEED KIT 2M (TRANSPARANT CABLE) & SUSPENSION SET

ECO FLUORESCENT GI

SL mini naked surface mounted TL5 SLS down GI (1793mm)





230V | GWT 960° | 4.20KG

black struc (gold interior)	**93431018**
black struc (white struc interior)	**93431016**
white struc (black struc interior)	**93431017**
white struc (gold interior)	**93431019**

2X T16 SLS | G5 | 21/39W

ECO FLUORESCENT GI

SL mini naked suspended TL5 SLS down GI (1793mm)



230V | GWT 960° | 4.20KG

black struc (gold interior)	**93431028**
black struc (white struc interior)	**93431026**
white struc (black struc interior)	**93431027**
white struc (gold interior)	**93431029**

2X T16 SLS | G5 | 21/39W

! INCL. POWER FEED KIT 2M (TRANSPARANT CABLE) & SUSPENSION SET

SL mini poly in

SL mini poly in is a very versatile architectural lighting solution that comes in two lengths, with fluorescent lighting units, both ceiling mounted or suspended.
SL mini poly in is available as 'ready-made' in fixed lengths, but is also customizable.

SUPERMODULAR.COM/EN/SL-MINI-POLY-IN

ECO FLUORESCENT GI

SL mini poly in surface mounted TL5
continuous down GI (1207mm)



230V GWT 960° 2.80KG

alu	93410010
black struc	93410011
white struc	93410012

1X T16 G5 28/54W

ECO FLUORESCENT GI

SL mini poly in suspended TL5
continuous down GI (1207mm)



230V GWT 960° 2.80KG

alu	93410020
black struc	93410021
white struc	93410022

1X T16 G5 28/54W

! INCL. POWER FEED KIT 2M (TRANSPARANT CABLE) & SUSPENSION SET

ECO FLUORESCENT GI

SL mini poly in surface mounted TL5
continuous down GI (1793mm)



230V GWT 960° 4.20KG

alu	93411010
black struc	93411011
white struc	93411012

2X T16 G5 21/39W

ECO FLUORESCENT GI

SL mini poly in suspended TL5
continuous down GI (1793mm)



230V GWT 960° 4.20KG

alu	93411020
black struc	93411021
white struc	93411022

2X T16 G5 21/39W

! INCL. POWER FEED KIT 2M (TRANSPARANT CABLE) & SUSPENSION SET



SL mini poly out

The subtle border of the poly of this lighting solution connects to the U-shaped housing, generating a light output both down- and sideward. The light it generates is very subtle thanks to this side poly. SL mini poly out comes in two lengths, with fluorescent lighting units, both ceiling mounted or suspended.
SL mini poly out is also available 'custom made' with unlimited flexibility.

SUPERMODULAR.COM/EN/SL-MINI-POLY-OUT

ECO FLUORESCENT GI

SL mini poly out surface mounted TL5
continuous down GI (1207mm)



230V | GWT 960° | 2.80KG

alu	93420010
black struc	93420011
white struc	93420012

1X T16 G5 28/54W

ECO FLUORESCENT GI

SL mini poly out suspended TL5
continuous down GI (1207mm)



230V | GWT 960° | 2.80KG

alu	93420020
black struc	93420021
white struc	93420022

1X T16 G5 28/54W

! INCL. POWER FEED KIT 2M (TRANSPARANT CABLE) & SUSPENSION SET

ECO FLUORESCENT GI

SL mini poly out surface mounted TL5
continuous down GI (1793mm)



230V | GWT 960° | 4.20KG

alu	93421010
black struc	93421011
white struc	93421012

2X T16 G5 21/39W

ECO FLUORESCENT GI

SL mini poly out suspended TL5
continuous down GI (1793mm)



230V | GWT 960° | 4.20KG

alu	93421020
black struc	93421021
white struc	93421022

2X T16 G5 21/39W

! INCL. POWER FEED KIT 2M (TRANSPARANT CABLE) & SUSPENSION SET

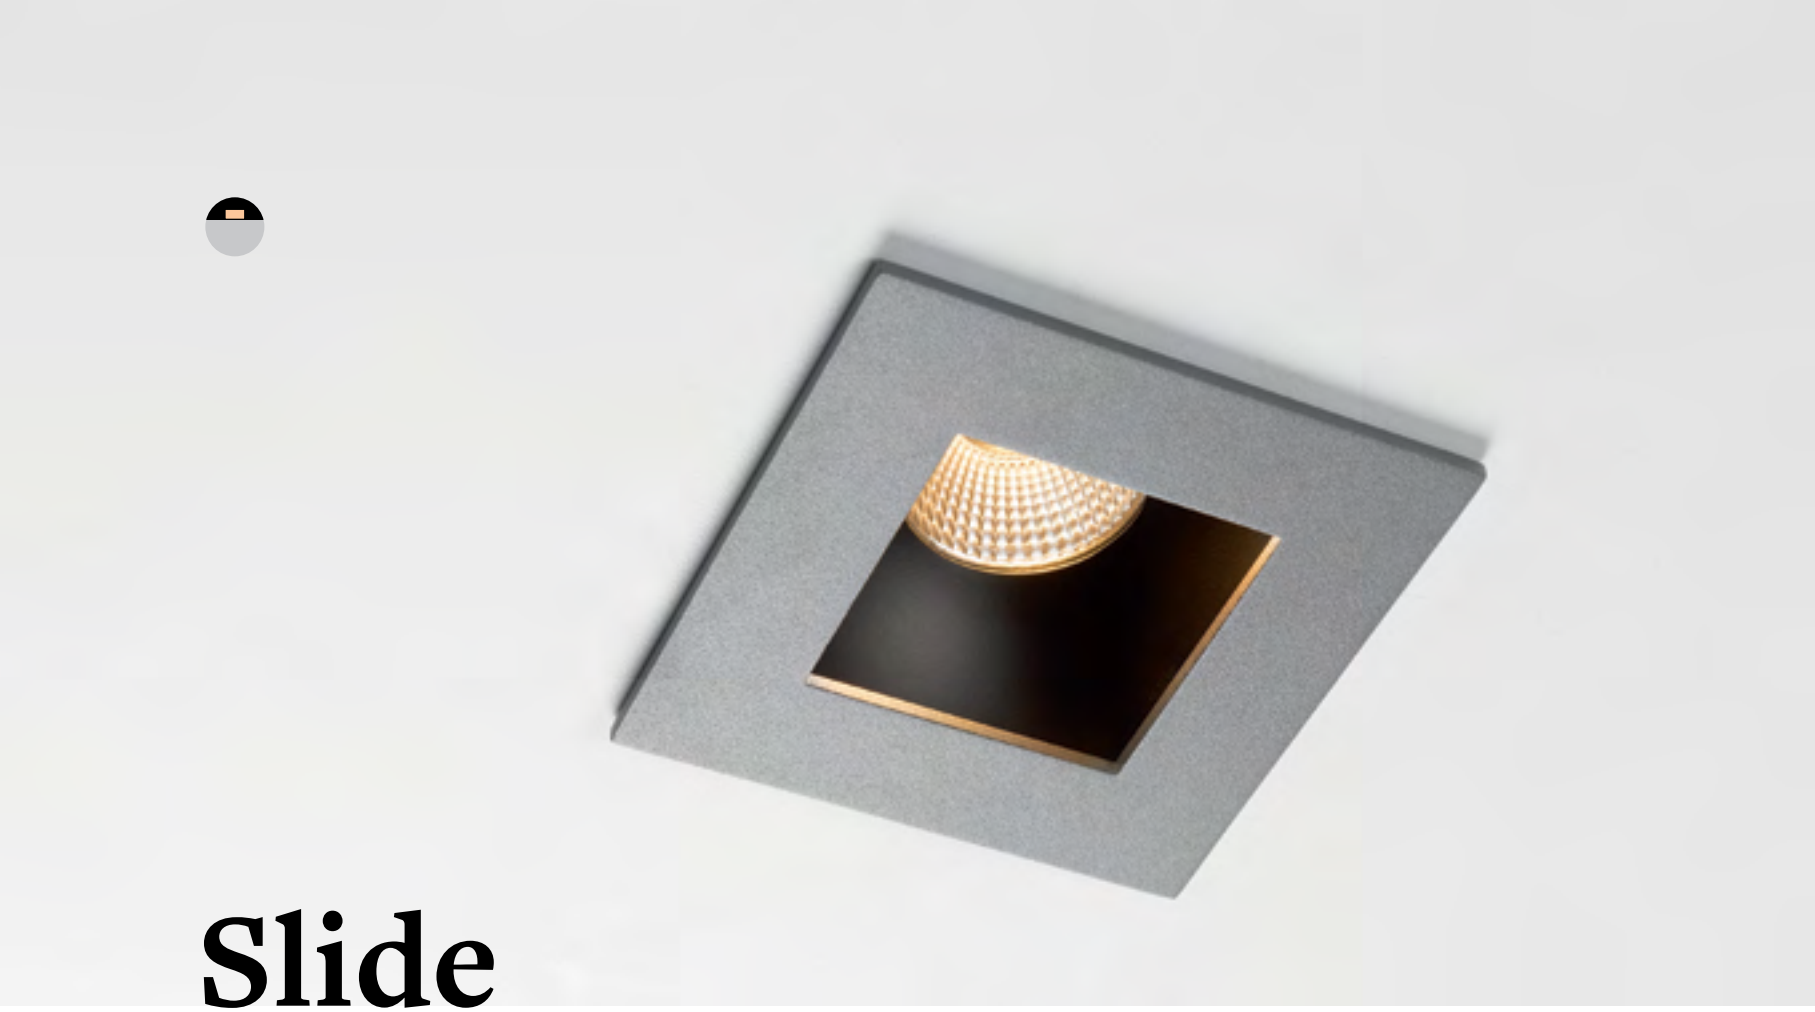

Slide

Slide is one of the Modular icons. Its name refers to the light gliding out from the luminaire, channelled by the stunning inner body, and creating a softer and smooth lighting experience. Slide owes its popularity to its deeply embedded light source. It is available in the Modular donkey grey structure with black inner body or in an entirely white structure version.

SUPERMODULAR.COM/EN/SLIDE

ECO LED GE

Slide IP54 LED GE



1X LED ARRAY INCL. 9.2W

! 3500K AND 4000K ON REQUEST

	2700K / CRI90+	3000K / CRI90+
	25°	25°
donkey grey struc	**10486174**	**10486374**
white struc	**10486109**	**10486309**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	**500mA**
2700K / 25°	426lm 6.2W	**548lm 9.2W**
3000K / 25°	451lm 6.2W	**607lm 9.2W**

DRIVER	SEE DRIVER MATRIX

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889830	CONBOX 190X192X130X256
12290330	GYPKIT 190X190 - Ø92

ECO LED GI

Slide IP54 LED RG



1X LED ARRAY INCL. 9.2W

! 3500K AND 4000K ON REQUEST

TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+
	25°	25°
donkey grey struc - black	**10486574**	**10486774**
white struc	**10486509**	**10486709**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

2700K / 25°	**548lm 12W**
3000K / 25°	**607lm 12W**

INSTALLATION	
10889830	CONBOX 190X192X130X256
12290330	GYPKIT 190X190 - Ø92

Slide

SLIDE IP54

SLIDE IP54

SLIDE
KONINKLIJKE HOCKEY CLUB, LEUVEN (BE)
ARCHITEAM

Smart cake

Smart cake is part of the Smart family. This family's styling is based on our most popular iconic designs. Its gently sloping sides ensure a soft distribution of light. Since its introduction in 2010, Smart has become an extensive portfolio with a broad range of accessories. Concretely this means that the luminaires consist of a light source (LED, halogen), which can be combined with one of three trims to suit your needs.

The new spotlights can be combined with Smart mask, Smart surface box or surface tubed to form the perfect solution for any interior. Choose a white, black or gold finishing. Also available in different sizes, fix and adjustable, IP version, ...

SUPERMODULAR.COM/EN/SMART-CAKE

ECO LED GE

Smart cake 48 LED GE



1X HIGH POWER LED INCL. 1.5W

! 3500K ON REQUEST
! CAN BE COMBINED WITH SMART SURFACE TUBED

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
black struc	12870132	12870032	12870232
white struc	12870109	12870009	12870209

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	**500mA**
2700K / 25°	55lm 1W	**77lm 1.5W**
3000K / 25°	59lm 1W	**84lm 1.5W**
4000K / 25°	65lm 1W	**92lm 1.5W**

DRIVER	SEE DRIVER MATRIX
SMART COMBINATIONS	SEE FOLDOUT PAGE 323

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889530	CONBOX 100X123X80X187
12290730	GYPKIT 100X120 - Ø45

ECO LED GE

Smart cake 48 IP54 LED GE



1X HIGH POWER LED INCL. 1.5W

! 3500K ON REQUEST
! CAN BE COMBINED WITH SMART SURFACE TUBED

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
black struc	12871132	12871032	12871232
white struc	12871109	12871009	12871209

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	**500mA**
2700K / 25°	51lm 1W	**72lm 1.5W**
3000K / 25°	55lm 1W	**79lm 1.5W**
4000K / 25°	61lm 1W	**86lm 1.5W**

DRIVER	SEE DRIVER MATRIX
SMART COMBINATIONS	SEE FOLDOUT PAGE 323

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889530	CONBOX 100X123X80X187
12290730	GYPKIT 100X120 - Ø45

Smart cake

ECO LED GE

Smart cake 82 LED GE



1X LED ARRAY INCL. 9.2W

! 3500K ON REQUEST
! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX & SURFACE TUBED (SURFACE/SUSPENSION)

	2700K / CRI90+			3000K / CRI90+			4000K / CRI90+		
	15°	25°	40°	15°	25°	40°	15°	25°	40°
black struc	12411632	12411032	12411232	12411732	12411432	12411532	12411832	12411132	12411332
gold	12411646	12411046	12411246	12411746	12411446	12411546	12411846	12411146	12411346
white struc	12411609	12411009	12411209	12411709	12411409	12411509	12411809	12411109	12411309

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	500mA
2700K / 25°	513lm 6.2W	**689lm 9.2W**
3000K / 25°	533lm 6.2W	**716lm 9.2W**
4000K / 25°	583lm 6.2W	**733lm 9.2W**

DRIVER SEE DRIVER MATRIX

SMART COMBINATIONS SEE FOLDOUT PAGE 323

CONNECTED *WHEN CONNECTED TO 1-10V DRIVER

13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70
12500230	RECESSED RING Ø70 H100

ECO LED GE

Smart cake 82 LED **warm dim** GE





1X LED ARRAY INCL. 12W

! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX & SURFACE TUBED (SURFACE ONLY) GE

	2000K - 3000K / CRI90+		
	15°	25°	40°
black struc	12413032	12413132	12413232
gold	12413046	12413146	12413246
white struc	12413009	12413109	12413209

DRIVER SEE DRIVER MATRIX

SMART COMBINATIONS SEE FOLDOUT PAGE 323

CONNECTED *WHEN CONNECTED TO 1-10V DRIVER

13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70
12500230	RECESSED RING Ø70 H100

ECO LED GE

Smart cake 82 IP54 LED GE



1X LED ARRAY INCL. 9.2W

! 3500K ON REQUEST
! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX & SURFACE TUBED (SURFACE/SUSPENSION)

Friends of hue | III | 500mA | IP54 | GWT 960° | 0.36KG

	2700K / CRI90+			3000K / CRI90+			4000K / CRI90+		
	15°	25°	40°	15°	25°	40°	15°	25°	40°
black struc	12412632	12412032	12412132	12412732	12412332	12412432	12412832	12412532	12412232
gold	12412646	12412046	12412146	12412746	12412346	12412446	12412846	12412546	12412246
white struc	12412609	12412009	12412109	12412709	12412309	12412409	12412809	12412509	12412209

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	500mA
2700K / 25°	444lm 6.2W	**596lm 9.2W**
3000K / 25°	462lm 6.2W	**619lm 9.2W**
4000K / 25°	505lm 6.2W	**635lm 9.2W**

DRIVER SEE DRIVER MATRIX

SMART COMBINATIONS SEE FOLDOUT PAGE 323

CONNECTED *WHEN CONNECTED TO 1-10V DRIVER

13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70
12500230	RECESSED RING Ø70 H100

ECO LED GE

Smart cake 82 IP54 LED **warm dim** GE



1X LED ARRAY INCL. 12W

! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX & SURFACE TUBED (SURFACE ONLY) GE

Friends of hue | III | 350mA | IP54 | GWT 960° | 0.36KG

	2000K - 3000K / CRI90+		
	15°	25°	40°
black struc	12414032	12414132	12414232
gold	12414046	12414146	12414246
white struc	12414009	12414109	12414209

DRIVER SEE DRIVER MATRIX

SMART COMBINATIONS SEE FOLDOUT PAGE 323

CONNECTED *WHEN CONNECTED TO 1-10V DRIVER

13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70
12500230	RECESSED RING Ø70 H100

Smart cake

HALOGEN 12V | GE

Smart cake 82 MR16 GE



1X QR-CBC 51 | GU 5.3 | MAX. 50W

! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX & SURFACE TUBED LARGE GE

12V | IP20 | GWT 960° | 0.10KG

black struc	**12420032**
white struc	**12420009**

SMART COMBINATIONS SEE FOLDOUT PAGE 323

INSTALLATION

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70
12500230	RECESSED RING Ø70 H100

HALOGEN 230V

Smart cake 82 GU10





1X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX & SURFACE TUBED LARGE GE (WHEN USED WITH LED RETROFIT)

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.20KG

black struc	**12420132**
gold	**12420146**
white struc	**12420109**

SMART COMBINATIONS SEE FOLDOUT PAGE 323

CONNECTED

70000613	PHILIPS HUE RGB GU10 BULB 6.5W **
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

** NOT IN COMBINATION WITH SMART SURFACE BOX AND SURFACE TUBED

INSTALLATION

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70
12500230	RECESSED RING Ø70 H100

ECO LED GE

Smart cake 115 LED GE



1X LED ARRAY INCL. 16.25W

! 3500K ON REQUEST
! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX & SURFACE TUBED (SURFACE/SUSPENSION)

Friends of hue · III · 500mA · IP20 · GWT 960° · 0.52KG

	2700K / CRI90+			3000K / CRI90+			4000K / CRI90+		
	15°	25°	40°	15°	25°	40°	15°	25°	40°
black struc	**12741232**	**12741032**	**12741332**	**12741432**	**12741532**	**12741632**	**12741732**	**12741132**	**12741832**
gold	**12741246**	**12741046**	**12741346**	**12741446**	**12741546**	**12741646**	**12741746**	**12741146**	**12741846**
white struc	**12741209**	**12741009**	**12741309**	**12741409**	**12741509**	**12741609**	**12741709**	**12741109**	**12741809**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	**500mA**	700mA	900mA
2700K / 25°	1019lm 11W	**1397lm 16.25W**	1858lm 23.6W	2190lm 31.2W
3000K / 25°	1000lm 11W	**1372lm 16.25W**	1825lm 23.6W	2152lm 31.2W
4000K / 25°	1166lm 11W	**1599lm 16.25W**	2127lm 23.6W	2512lm 31.2W

DRIVER — SEE DRIVER MATRIX

SMART COMBINATIONS — SEE FOLDOUT PAGE 323

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

ECO LED GE

Smart cake 115 IP54 LED GE





1X LED ARRAY INCL. 16.25W

! 3500K ON REQUEST
! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX & SURFACE TUBED (SURFACE/SUSPENSION)

Friends of hue · III · 500mA · IP54 · GWT 960° · 0.53KG

	2700K / CRI90+			3000K / CRI90+			4000K / CRI90+		
	15°	25°	40°	15°	25°	40°	15°	25°	40°
black struc	**12742232**	**12742032**	**12742332**	**12742432**	**12742532**	**12742632**	**12742732**	**12742132**	**12742832**
gold	**12742246**	**12742046**	**12742346**	**12742446**	**12742546**	**12742646**	**12742746**	**12742146**	**12742846**
white struc	**12742209**	**12742009**	**12742309**	**12742409**	**12742509**	**12742609**	**12742709**	**12742109**	**12742809**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	**500mA**	700mA	900mA
2700K / 25°	983lm 11W	**1348lm 16.25W**	1793lm 23.6W	2113lm 31.2W
3000K / 25°	965lm 11W	**1323lm 16.25W**	1760lm 23.6W	2076lm 31.2W
4000K / 25°	1125lm 11W	**1543lm 16.25W**	2052lm 23.6W	2423lm 31.2W

DRIVER — SEE DRIVER MATRIX

SMART COMBINATIONS — SEE FOLDOUT PAGE 323

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

Smart cake

ECO LED GE

Smart cake 115 diffuse IP54 LED GE



1X LED ARRAY INCL. 16.25W

! 3500K ON REQUEST
! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX & SURFACE TUBED (SURFACE/SUSPENSION)

Friends of hue | III | 500mA | IP54 | GWT 960° | 0.55KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	85°	85°	85°
black struc	**12743032**	**12743532**	**12743132**
gold	**12743046**	**12743546**	**12743146**
white struc	**12743009**	**12743509**	**12743109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	**500mA**	700mA	900mA
2700K / 25°	694lm 11W	**952lm 16.25W**	1266lm 23.6W	1492lm 31.2W
3000K / 25°	682lm 11W	**934lm 16.25W**	1243lm 23.6W	1466lm 31.2W
4000K / 25°	794lm 11W	**1089lm 16.25W**	1449lm 23.6W	1711lm 31.2W

DRIVER SEE DRIVER MATRIX

SMART COMBINATIONS SEE FOLDOUT PAGE 323

CONNECTED *WHEN CONNECTED TO 1-10V DRIVER

13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION

10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

ECO LED GE

Smart cake 115 adjustable LED GE





1X LED ARRAY INCL. 9.2W

! 3500K ON REQUEST
! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX & SURFACE TUBED (SURFACE ONLY)

Friends of hue | III | 500mA | IP20 | GWT 960° | 0.49KG

	2700K / CRI90+			3000K / CRI90+			4000K / CRI90+		
	15°	25°	40°	15°	25°	40°	15°	25°	40°
black struc	**12771232**	**12771032**	**12771332**	**12771432**	**12771532**	**12771632**	**12771732**	**12771132**	**12771832**
gold	**12771246**	**12771046**	**12771346**	**12771446**	**12771546**	**12771646**	**12771746**	**12771146**	**12771846**
white struc	**12771209**	**12771009**	**12771309**	**12771409**	**12771509**	**12771609**	**12771709**	**12771109**	**12771809**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	**500mA**
2700K / 25°	471lm 6.2W	**632lm 9.2W**
3000K / 25°	489lm 6.2W	**657lm 9.2W**
4000K / 25°	535lm 6.2W	**673lm 9.2W**

DRIVER SEE DRIVER MATRIX

SMART COMBINATIONS SEE FOLDOUT PAGE 323

CONNECTED *WHEN CONNECTED TO 1-10V DRIVER

13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION

10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

ECO LED GE

Smart cake 115 adjustable LED **warm dim** GE



1X LED ARRAY INCL. | 12W

! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX GE

Friends of hue | III | 350mA | IP20 | GWT 960° | 0.49KG

	2000K - 3000K / CRI90+		
	15°	25°	40°
black struc	12773032	12773132	12773232
gold	12773046	12773146	12773246
white struc	12773009	12773109	12773209

DRIVER SEE DRIVER MATRIX

SMART COMBINATIONS SEE FOLDOUT PAGE 323

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

HALOGEN 230V

Smart cake 115 adjustable GU10



1X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.46KG

black struc	12772032
gold	12772046
white struc	12772009

SMART COMBINATIONS SEE FOLDOUT PAGE 323

CONNECTED	
70000613	PHILIPS HUE RGB GU10 BULB 6.5W **
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

** NOT IN COMBINATION WITH SMART SURFACE BOX AND SURFACE TUBED

Smart cake

ECO LED GE

Smart cake 160 IP54 LED GE



1X LED ARRAY INCL. 42W

! 3500K ON REQUEST
! CAN BE COMBINED WITH SMART MASK

	2700K / CRI90+			3000K / CRI90+			4000K / CRI90+		
	15°	25°	40°	15°	25°	40°	15°	25°	40°
black struc	**13004032**	**13004332**	**13004632**	**13004132**	**13004432**	**13004732**	**13004232**	**13004532**	**13004832**
white struc	**13004009**	**13004309**	**13004609**	**13004109**	**13004409**	**13004709**	**13004209**	**13004509**	**13004809**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	500mA	700mA	900mA
2700K / 25°	1702lm 16W	2318lm 23.5W	2877lm 30.8W
3000K / 25°	1765lm 16W	2404lm 23.5W	2983lm 30.8W
4000K / 25°	1908lm 16W	2598lm 23.5W	3225lm 30.8W

	1050mA	**1200mA**	1400mA
2700K / 25°	3327lm 36.3W	**3737lm 42W**	4303lm 49.7W
3000K / 25°	3450lm 36.3W	**3876lm 42W**	4462lm 49.7W
4000K / 25°	3730lm 36.3W	**4189lm 42W**	4823lm 49.7W

DRIVER SEE DRIVER MATRIX

SMART COMBINATIONS SEE FOLDOUT PAGE 323

CONNECTED *WHEN CONNECTED TO 1-10V DRIVER

13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

ECO LED GE

Smart cake 160 diffuse IP54 LED GE



1X LED ARRAY INCL. 42W

! 3500K ON REQUEST
! CAN BE COMBINED WITH SMART MASK

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	60°	60°	60°
black struc	**13005032**	**13005132**	**13005232**
white struc	**13005009**	**13005109**	**13005209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	500mA	700mA	900mA
2700K / 25°	1385lm 16W	1886lm 23.5W	2341lm 30.8W
3000K / 25°	1436lm 16W	1955lm 23.5W	2427lm 30.8W
4000K / 25°	1552lm 16W	2114m 23.5W	2624lm 30.8W

	1050mA	**1200mA**	1400mA
2700K / 25°	2707lm 36.3W	**3040lm 42W**	3500lm 49.7W
3000K / 25°	2807lm 36.3W	**3153lm 42W**	3630lm 49.7W
4000K / 25°	3034lm 36.3W	**3408lm 42W**	3924lm 49.7W

DRIVER SEE DRIVER MATRIX

SMART COMBINATIONS SEE FOLDOUT PAGE 323

CONNECTED *WHEN CONNECTED TO 1-10V DRIVER

13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

SMART CAKE 160
BONTINCK ARCHITECTURE AND ENGINEERING NV, GENT (BE)

Smart cake

SMART CAKE 115 ADJUSTABLE
SMART SURFACE TUBED 115

SMART CAKE 82
SMART SURFACED TUBED SUSPENDED 82 XL

SMART CAKE 115 ADJUSTABLE WITH SMART SURFACE TUBED 115
PRIVATE RESIDENCE, KORTRIJK (BE)

Smart cake

SMART CAKE 82 WITH SMART SURFACE BOX & MASK
OFFICE, ANTWERPEN (BE)
ABOCO

Smart cake

SMART CAKE 115 ADJUSTABLE
SMART MASK 115
SMART SURFACE BOX 115

SMART CAKE 115 ADJUSTABLE

SMART CAKE 115
SMART MASK 115

Smart cake

SMART CAKE
PRIVATE RESIDENCE, EERSEL (NL)
SENNAH STUDIO

SMART CAKE
HOTEL V FIZEAUSTRAAT, AMSTERDAM (NL)
MIRJAM ESPINOSA

Smart kup

Smart kup is one of the 3 forms of the Smart family. The cone of the Smart kup ends in a fine trim. A trim particular Modular. The same subtle trim is used in several other Modular luminaires. The Smart family's styling is based on our most popular designs. Concretely this means that the luminaires consist of a light source (LED or halogen) which can be combined with one of three trims to suit your needs.

The new spotlights can be combined with Smart mask, Smart surface box or surface tubed to form the perfect solution for any interior. Choose a white, black or gold finishing. Also available in different sizes, fix and adjustable, IP version, ...

SUPERMODULAR.COM/EN/SMART-KUP

ECO LED GE

Smart kup 48 LED GE



1X HIGH POWER LED INCL. 1.5W

! CAN BE COMBINED WITH SMART SURFACE TUBED

Friends of hue | III | 500mA | IP20 | GWT 960° | 0.12KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
black struc	**12880132**	**12880032**	**12880232**
white struc	**12880109**	**12880009**	**12880209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	**500mA**
2700K / 25°	64lm 1W	**91lm 1.5W**
3000K / 25°	70lm 1W	**99lm 1.5W**
4000K / 25°	77lm 1W	**109lm 1.5W**

DRIVER	SEE DRIVER MATRIX
SMART COMBINATIONS	SEE FOLDOUT PAGE 323

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889530	CONBOX 100X123X80X187
12290730	GYPKIT 100X120 - Ø45

ECO LED GE

Smart kup 48 IP54 LED GE



1X HIGH POWER LED INCL. 1.5W

! CAN BE COMBINED WITH SMART SURFACE TUBED

Friends of hue | III | 500mA | IP54 | GWT 960° | 0.13KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
black struc	**12881132**	**12881032**	**12881232**
white struc	**12881109**	**12881009**	**12881209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	**500mA**
2700K / 25°	62lm 1W	**87lm 1.5W**
3000K / 25°	67lm 1W	**95lm 1.5W**
4000K / 25°	74lm 1W	**105lm 1.5W**

DRIVER	SEE DRIVER MATRIX
SMART COMBINATIONS	SEE FOLDOUT PAGE 323

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889530	CONBOX 100X123X80X187
12290730	GYPKIT 100X120 - Ø45

Smart kup

ECO LED GE

Smart kup 82 LED GE



1X LED ARRAY INCL. 9.2W

! 3500K ON REQUEST
! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX & SURFACE TUBED (SURFACE/SUSPENSION)

	2700K / CRI90+			3000K / CRI90+			4000K / CRI90+		
	15°	25°	40°	15°	25°	40°	15°	25°	40°
black struc	12471632	12471032	12471232	12471732	12471432	12471532	12471832	12471132	12471332
gold	12471646	12471046	12471246	12471746	12471446	12471546	12471846	12471146	12471346
white struc	12471609	12471009	12471209	12471709	12471409	12471509	12471809	12471109	12471309

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	500mA
2700K / 25°	554lm 6.2W	**744lm 9.2W**
3000K / 25°	576lm 6.2W	**773lm 9.2W**
4000K / 25°	630lm 6.2W	**792lm 9.2W**

DRIVER	SEE DRIVER MATRIX
SMART COMBINATIONS	SEE FOLDOUT PAGE 323

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70
12500230	RECESSED RING Ø70 H100

ECO LED GE

Smart kup 82 LED **warm dim** GE





1X LED ARRAY INCL. 12W

! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX & SURFACE TUBED (SURFACE ONLY) GE

	2000K - 3000K / CRI90+		
	15°	25°	40°
black struc	12473032	12473132	12473232
gold	12473046	12473146	12473246
white struc	12473009	12473109	12473209

DRIVER	SEE DRIVER MATRIX
SMART COMBINATIONS	SEE FOLDOUT PAGE 323

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70
12500230	RECESSED RING Ø70 H100

ECO LED GE

Smart kup 82 IP54 LED GE



1X LED ARRAY INCL. 9.2W

! 3500K ON REQUEST
! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX & SURFACE TUBED (SURFACE/SUSPENSION)

Friends of hue | III | 500mA | IP54 | GWT 960° | 0.36KG

	2700K / CRI90+			3000K / CRI90+			4000K / CRI90+		
	15°	25°	40°	15°	25°	40°	15°	25°	40°
black struc	12472632	12472032	12472132	12472732	12472332	12472432	12472832	12472532	12472232
gold	12472646	12472046	12472146	12472746	12472346	12472446	12472846	12472546	12472246
white struc	12472609	12472009	12472109	12472709	12472309	12472409	12472809	12472509	12472209

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	**500mA**
2700K / 25°	529lm 6.2W	**710lm 9.2W**
3000K / 25°	550lm 6.2W	**738lm 9.2W**
4000K / 25°	601lm 6.2W	**756lm 9.2W**

DRIVER	SEE DRIVER MATRIX

SMART COMBINATIONS	SEE FOLDOUT PAGE 323

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70
12500230	RECESSED RING Ø70 H100

ECO LED GE

Smart kup 82 IP54 LED **warm dim** GE



1X LED ARRAY INCL. 12W

! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX & SURFACE TUBED (SURFACE ONLY) GE

Friends of hue | III | 350mA | IP54 | GWT 960° | 0.36KG

	2000K - 3000K / CRI90+		
	15°	25°	40°
black struc	12474032	12474132	12474232
gold	12474046	12474146	12474246
white struc	12474009	12474109	12474209

DRIVER	SEE DRIVER MATRIX

SMART COMBINATIONS	SEE FOLDOUT PAGE 323

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70
12500230	RECESSED RING Ø70 H100

Smart kup

HALOGEN 12V | GE

Smart kup 82 MR16 GE



1X QR-CBC 51 | GU 5.3 | MAX. 50W

! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX & SURFACE TUBED LARGE GE

12V | IP20 | GWT 960° | 0.10KG

black struc	**12480032**
white struc	**12480009**

SMART COMBINATIONS SEE FOLDOUT PAGE 323

INSTALLATION

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70
12500230	RECESSED RING Ø70 H100

HALOGEN 230V

Smart kup 82 GU10





1X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX & SURFACE TUBED LARGE GE (WHEN USED WITH LED RETROFIT)

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.20KG

black struc	**12480132**
gold	**12480146**
white struc	**12480109**

SMART COMBINATIONS SEE FOLDOUT PAGE 323

CONNECTED

70000613	PHILIPS HUE RGB GU10 BULB 6.5W **
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

** NOT IN COMBINATION WITH SMART SURFACE BOX AND SURFACE TUBED

INSTALLATION

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70
12500230	RECESSED RING Ø70 H100

ECO LED GE

Smart kup 115 LED GE



1X LED ARRAY INCL. 16.25W

! 3500K ON REQUEST
! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX & SURFACE TUBED (SURFACE/SUSPENSION)

Friends of hue · III · 500mA · IP20 · GWT 960° · 0.46KG

	2700K / CRI90+			3000K / CRI90+			4000K / CRI90+		
	15°	25°	40°	15°	25°	40°	15°	25°	40°
black struc	12761232	12761032	12761332	12761432	12761532	12761632	12761732	12761132	12761832
gold	12761246	12761046	12761346	12761446	12761546	12761646	12761746	12761146	12761846
white struc	12761209	12761009	12761309	12761409	12761509	12761609	12761709	12761109	12761809

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	**500mA**	700mA	900mA
2700K / 25°	1065lm 11W	**1461lm 16.25W**	1943lm 23.6W	2290lm 31.2W
3000K / 25°	1046lm 11W	**1434lm 16.25W**	1908lm 23.6W	2250lm 31.2W
4000K / 25°	1219lm 11W	**1672lm 16.25W**	2224lm 23.6W	2626lm 31.2W

DRIVER — SEE DRIVER MATRIX

SMART COMBINATIONS — SEE FOLDOUT PAGE 323

CONNECTED — *WHEN CONNECTED TO 1-10V DRIVER

13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION

10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

ECO LED GE

Smart kup 115 IP54 LED GE



1X LED ARRAY INCL. 16.25W

! 3500K ON REQUEST
! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX & SURFACE TUBED (SURFACE/SUSPENSION)

Friends of hue · III · 500mA · IP54 · GWT 960° · 0.49KG

	2700K / CRI90+			3000K / CRI90+			4000K / CRI90+		
	15°	25°	40°	15°	25°	40°	15°	25°	40°
black struc	12762232	12762032	12762332	12762432	12762532	12762632	12762732	12762132	12762832
gold	12762246	12762046	12762346	12762446	12762546	12762646	12762746	12762146	12762846
white struc	12762209	12762009	12762309	12762409	12762509	12762609	12762709	12762109	12762809

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	**500mA**	700mA	900mA
2700K / 25°	1029lm 11W	**1412lm 16.25W**	1878lm 23.6W	2213lm 31.2W
3000K / 25°	1011lm 11W	**1386lm 16.25W**	1844lm 23.6W	2175lm 31.2W
4000K / 25°	1178lm 11W	**1616lm 16.25W**	2150lm 23.6W	2538lm 31.2W

DRIVER — SEE DRIVER MATRIX

SMART COMBINATIONS — SEE FOLDOUT PAGE 323

CONNECTED — *WHEN CONNECTED TO 1-10V DRIVER

13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION

10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

Smart kup

ECO LED GE

Smart kup 115 diffuse IP54 LED GE



1X LED ARRAY INCL. 16.25W

! 3500K ON REQUEST
! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX & SURFACE TUBED (SURFACE/SUSPENSION)

Friends of hue | III | 500mA | IP54 | GWT 960° | 0.48KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	85°	85°	85°
black struc	**12763032**	**12763532**	**12763132**
gold	**12763046**	**12763546**	**12763146**
white struc	**12763009**	**12763509**	**12763109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	**500mA**	700mA	900mA
2700K / 25°	811lm 11W	**1113lm 16.25W**	1480lm 23.6W	1744lm 31.2W
3000K / 25°	797lm 11W	**1092lm 16.25W**	1453lm 23.6W	1713lm 31.2W
4000K / 25°	928lm 11W	**1273lm 16.25W**	1694lm 23.6W	2000lm 31.2W

DRIVER	SEE DRIVER MATRIX
SMART COMBINATIONS	SEE FOLDOUT PAGE 323

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

ECO LED GE

Smart kup 115 adjustable LED GE





1X LED ARRAY INCL. 9.2W

! 3500K ON REQUEST
! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX & SURFACE TUBED (SURFACE ONLY)

Friends of hue | III | 500mA | IP20 | GWT 960° | 0.43KG

	2700K / CRI90+			3000K / CRI90+			4000K / CRI90+		
	15°	25°	40°	15°	25°	40°	15°	25°	40°
black struc	**12791232**	**12791032**	**12791332**	**12791432**	**12791532**	**12791632**	**12791732**	**12791132**	**12791832**
gold	**12791246**	**12791046**	**12791346**	**12791446**	**12791546**	**12791646**	**12791746**	**12791146**	**12791846**
white struc	**12791209**	**12791009**	**12791309**	**12791409**	**12791509**	**12791609**	**12791709**	**12791109**	**12791809**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	**500mA**
2700K / 25°	554lm 6.2W	**744lm 9.2W**
3000K / 25°	576lm 6.2W	**773lm 9.2W**
4000K / 25°	630lm 6.2W	**792lm 9.2W**

DRIVER	SEE DRIVER MATRIX
SMART COMBINATIONS	SEE FOLDOUT PAGE 323

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

ECO LED GE

Smart kup 115 adjustable LED **warm dim** GE



1X LED ARRAY INCL. | 12W

! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX GE

	2000K - 3000K / CRI90+		
	15°	25°	40°
black struc	12793032	12793132	12793232
gold	12793046	12793146	12793246
white struc	12793009	12793109	12793209

DRIVER	SEE DRIVER MATRIX
SMART COMBINATIONS	SEE FOLDOUT PAGE 323

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

HALOGEN 230V

Smart kup 115 adjustable GU10



1X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX

black struc	12792032
gold	12792046
white struc	12792009

SMART COMBINATIONS	SEE FOLDOUT PAGE 323

CONNECTED	
70000613	PHILIPS HUE RGB GU10 BULB 6.5W **
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

** NOT IN COMBINATION WITH SMART SURFACE BOX AND SURFACE TUBED

Smart kup

ECO LED GE

Smart kup 160 IP54 LED GE



1X LED ARRAY INCL. 42W

! 3500K ON REQUEST
! CAN BE COMBINED WITH SMART MASK

	2700K / CRI90+			3000K / CRI90+			4000K / CRI90+		
	15°	25°	40°	15°	25°	40°	15°	25°	40°
black struc	**13024032**	**13024332**	**13024632**	**13024132**	**13024432**	**13024732**	**13024232**	**13024532**	**13024832**
white struc	**13024009**	**13024309**	**13024609**	**13024109**	**13024409**	**13024709**	**13024209**	**13024509**	**13024809**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	500mA	700mA	900mA
2700K / 25°	1801lm 16W	2453lm 23.5W	3044lm 30.8W
3000K / 25°	1868lm 16W	2543lm 23.5W	3157lm 30.8W
4000K / 25°	2019lm 16W	2749lm 23.5W	3413lm 30.8W

	1050mA	**1200mA**	1400mA
2700K / 25°	3521lm 36.3W	**3955lm 42W**	4553lm 49.7W
3000K / 25°	3651lm 36.3W	**4101lm 42W**	4721lm 49.7W
4000K / 25°	3947lm 36.3W	**4433lm 42W**	5104lm 49.7W

DRIVER SEE DRIVER MATRIX

SMART COMBINATIONS SEE FOLDOUT PAGE 323

CONNECTED *WHEN CONNECTED TO 1-10V DRIVER

13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

ECO LED GE

Smart kup 160 diffuse IP54 LED GE



1X LED ARRAY INCL. 42W

! 3500K ON REQUEST
! CAN BE COMBINED WITH SMART MASK

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	60°	60°	60°
black struc	**13025032**	**13025132**	**13025232**
white struc	**13025009**	**13025109**	**13025209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	500mA	700mA	900mA
2700K / 25°	1494lm 16W	2034lm 23.5W	2525lm 30.8W
3000K / 25°	1549lm 16W	2110lm 23.5W	2618lm 30.8W
4000K / 25°	1675lm 16W	2280lm 23.5W	2830lm 30.8W

	1050mA	**1200mA**	1400mA
2700K / 25°	2920lm 36.3W	**3280lm 42W**	3776lm 49.7W
3000K / 25°	3028lm 36.3W	**3401lm 42W**	3916lm 49.7W
4000K / 25°	3273lm 36.3W	**3676lm 42W**	5233lm 49.7W

DRIVER SEE DRIVER MATRIX

SMART COMBINATIONS SEE FOLDOUT PAGE 323

CONNECTED *WHEN CONNECTED TO 1-10V DRIVER

13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

SMART KUP 160
BONTINCK ARCHITECTURE AND ENGINEERING NV, GENT (BE)

Smart kup

SMART KUP 82 WITH SMART SURFACE TUBED 82 XL
A SUIVRE, KORTRIJK (BE)

SMART KUP 115
SMART SURFACE TUBED 115

SMART KUP 82
SMART SURFACE TUBED SUSPENDED 82 LARGE

Smart kup

SMART KUP 115 ADJUSTABLE
SMART MASK 115

SMART KUP 115
SMART MASK 115
SMART SURFACE BOX 115

SMART KUP 115 DIFFUSE

SMART KUP 115
TOUR INCITY / CAISSE D'EPARGNE RHONE ALPES, LYON (FR)
DOP ARCHITECTURE

Smart kup

SMART KUP
PRIVATE RESIDENCE, AMSTERDAM (NL)

SMART KUP 115
EXPHAIR, SCHILDE (BE)
VIVA ARCHITECTURE

Smart kup

SMART KUP
PRIVATE RESIDENCE, WORTEGEM-PETEGEM
URBAIN ARCHITECTENCOLLECTIEF

SMART KUP 115 ADJUSTABLE
PRIVATE RESIDENCE, ROTTERDAM (NL)
MOERVAST

Smart kup

SMART KUP WITH SMART SURFACE TUBED
BIEN SNACKBAR, BERGEN (NO)

SMART KUP
IPI KULMAKUPPILA, HELSINKI (FI)
PETRA MAJANTIE OY

Smart kup

SMART KUP 115 ADJUSTABLE
DE GOUDEN TON, AMSTERDAM (NL)

SMART KUP
HOTEL V FIZEAUSTRAAT, AMSTERDAM (NL)
MIRJAM ESPINOSA

Smart lotis

Smart lotis is the best known fixture within the Smart family. The deeply recessed cone which holds the light source inspired the designers to create a very versatile spot to be combined with multiple accessories.
This family's styling is based on our most popular designs. Concretely this means that the luminaires consist of a module (LED or halogen) which can be combined with one of three trims to suit your needs.

The new spotlights can be combined with Smart mask, Smart surface box or Smart surface tubed to form the perfect solution for any interior. Choose a white, black or gold finishing. Also available in different sizes, fix and adjustable, IP version, ...

SUPERMODULAR.COM/EN/SMART-LOTIS

ECO LED GE

Smart lotis 48 LED GE



1X HIGH POWER LED INCL. 1.5W

! CAN BE COMBINED WITH SMART SURFACE TUBED

Friends of hue | III | 500mA | IP20 | GWT 960° | 0.12KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
black struc	**12860132**	**12860032**	**12860232**
white struc	**12860109**	**12860009**	**12860209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	**500mA**
2700K / 25°	64lm 1W	**91lm 1.5W**
3000K / 25°	70lm 1W	**99lm 1.5W**
4000K / 25°	77lm 1W	**109lm 1.5W**

DRIVER	SEE DRIVER MATRIX
SMART COMBINATIONS	SEE FOLDOUT PAGE 323

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889530	CONBOX 100X123X80X187
12290730	GYPKIT 100X120 - Ø45

ECO LED GE

Smart lotis 48 IP54 LED GE



1X HIGH POWER LED INCL. 1.5W

! CAN BE COMBINED WITH SMART SURFACE TUBED

Friends of hue | III | 500mA | IP54 | GWT 960° | 0.13KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
black struc	**12861132**	**12861032**	**12861232**
white struc	**12861109**	**12861009**	**12861209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	**500mA**
2700K / 25°	62lm 1W	**87lm 1.5W**
3000K / 25°	67lm 1W	**95lm 1.5W**
4000K / 25°	74lm 1W	**105lm 1.5W**

DRIVER	SEE DRIVER MATRIX
SMART COMBINATIONS	SEE FOLDOUT PAGE 323

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889530	CONBOX 100X123X80X187
12290730	GYPKIT 100X120 - Ø45

Smart asy lotis

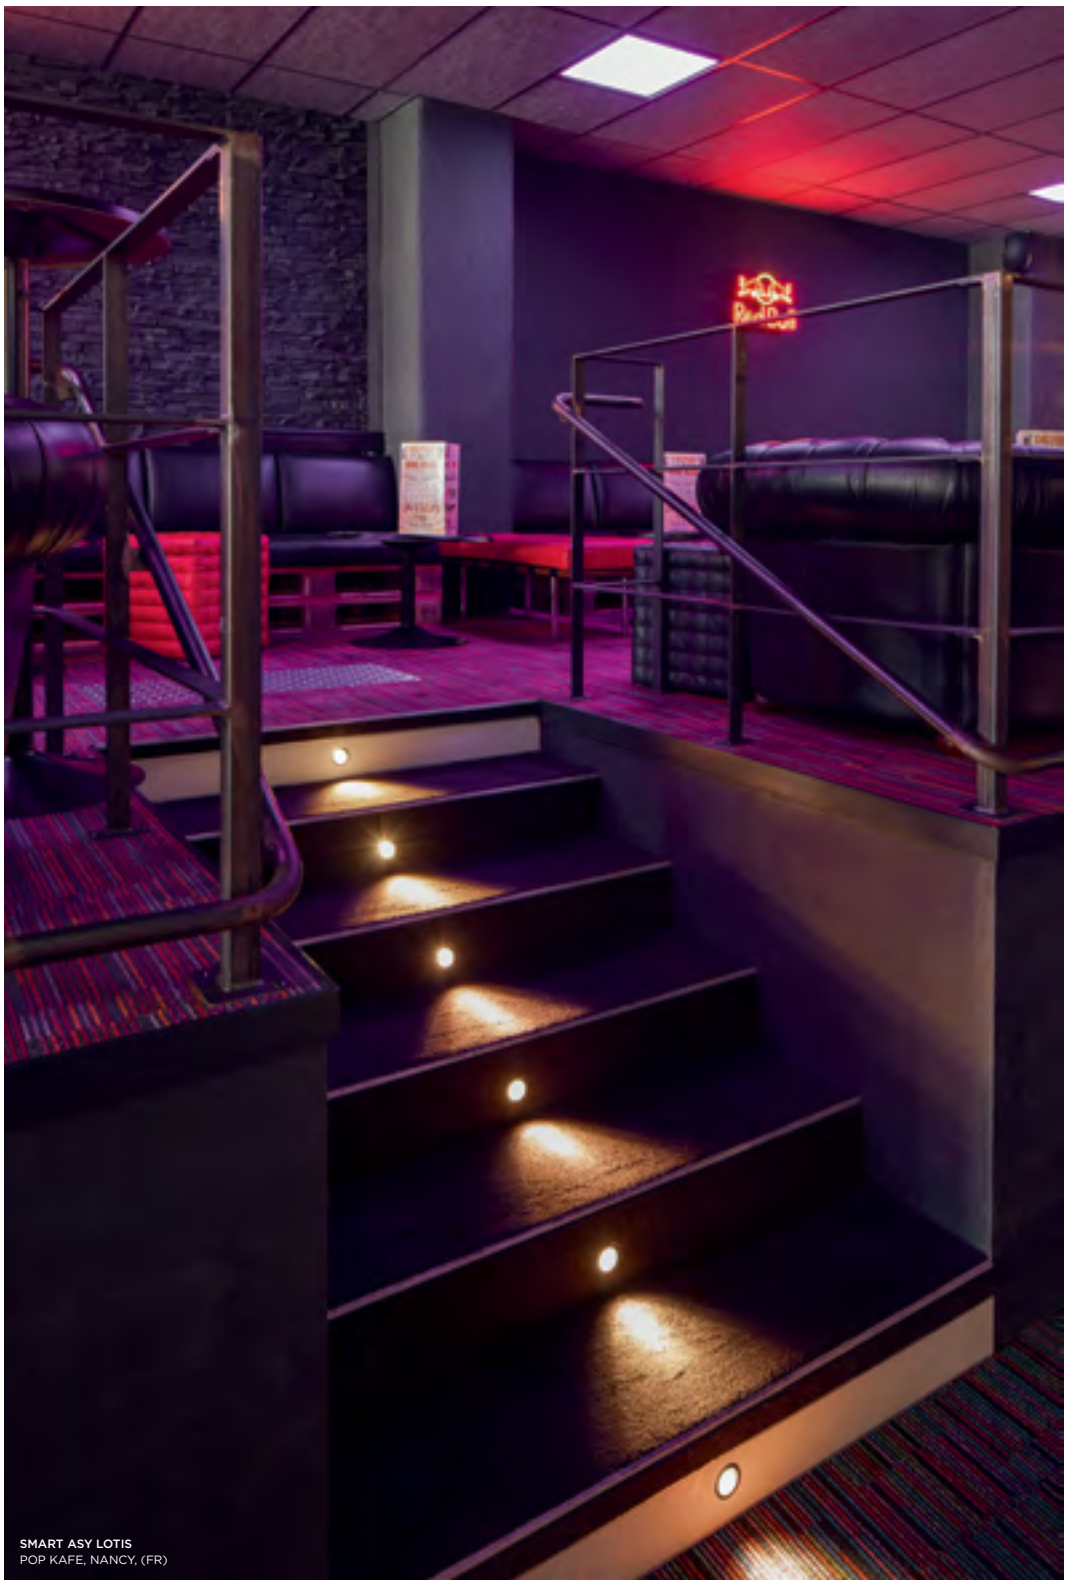

SMART ASY LOTIS
POP KAFE, NANCY, (FR)

ECO LED GE

Smart asy lotis 48 LED GE





1X HIGH POWER LED INCL. 1.5W

500mA IP20 GWT 960° 0.10KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
black struc	**12890132**	**12890032**	**12890232**
white struc	**12890109**	**12890009**	**12890209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(medium white struc)

	350mA	**500mA**
2700K / 25°	63lm 1W	**89lm 1.5W**
3000K / 25°	68lm 1W	**96lm 1.5W**
4000K / 25°	75lm 1W	**106lm 1.5W**

DRIVER SEE DRIVER MATRIX

CONNECTED

13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

ECO LED GE

Smart asy lotis 48 IP54 LED GE





1X HIGH POWER LED INCL. 1.5W

500mA IP54 GWT 960° 0.11KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
black struc	**12891132**	**12891032**	**12891232**
white struc	**12891109**	**12891009**	**12891209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(medium white struc)

	350mA	**500mA**
2700K / 25°	60lm 1W	**84lm 1.5W**
3000K / 25°	65lm 1W	**92lm 1.5W**
4000K / 25°	72lm 1W	**101lm 1.5W**

DRIVER SEE DRIVER MATRIX

CONNECTED

13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

Smart lotis

ECO LED GE

Smart lotis 82 LED GE





1X LED ARRAY INCL. 9.2W

! 3500K ON REQUEST
! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX & SURFACE TUBED (SURFACE/SUSPENSION)

Friends of hue · III · 500mA · IP20 · GWT 960° · 0.36KG

	2700K / CRI90+			3000K / CRI90+			4000K / CRI90+		
	15°	25°	40°	15°	25°	40°	15°	25°	40°
black struc	12441632	12441032	12441232	12441732	12441432	12441532	12441832	12441132	12441332
gold	12441646	12441046	12441246	12441746	12441446	12441546	12441846	12441146	12441346
white struc	12441609	12441009	12441209	12441709	12441409	12441509	12441809	12441109	12441309

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	500mA
2700K / 25°	554lm 6.2W	**744lm 9.2W**
3000K / 25°	576lm 6.2W	**773lm 9.2W**
4000K / 25°	630lm 6.2W	**792lm 9.2W**

DRIVER	SEE DRIVER MATRIX

SMART COMBINATIONS	SEE FOLDOUT PAGE 323

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70
12500230	RECESSED RING Ø70 H100

ECO LED GE

Smart lotis 82 LED **warm dim** GE





1X LED ARRAY INCL. 12W

! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX & SURFACE TUBED (SURFACE ONLY) GE

Friends of hue · III · 350mA · IP20 · GWT 960° · 0.36KG

	2000K - 3000K / CRI90+		
	15°	25°	40°
black struc	12443032	12443132	12443232
gold	12443046	12443146	12443246
white struc	12443009	12443109	12443209

DRIVER	SEE DRIVER MATRIX

SMART COMBINATIONS	SEE FOLDOUT PAGE 323

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70
12500230	RECESSED RING Ø70 H100

ECO LED GE

Smart lotis 82 IP54 LED GE





1X LED ARRAY INCL. 9.2W

! 3500K ON REQUEST
! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX & SURFACE TUBED (SURFACE/SUSPENSION)

Friends of hue · III · 500mA · IP54 · GWT 960° · 0.36KG

	2700K / CRI90+			3000K / CRI90+			4000K / CRI90+		
	15°	25°	40°	15°	25°	40°	15°	25°	40°
black struc	12442632	12442032	12442132	12442732	12442332	12442432	12442832	12442532	12442232
gold	12442646	12442046	12442146	12442746	12442346	12442446	12442846	12442546	12442246
white struc	12442609	12442009	12442109	12442709	12442309	12442409	12442809	12442509	12442209

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	500mA
2700K / 25°	529lm 6.2W	**710lm 9.2W**
3000K / 25°	550lm 6.2W	**738lm 9.2W**
4000K / 25°	601lm 6.2W	**756lm 9.2W**

DRIVER SEE DRIVER MATRIX

SMART COMBINATIONS SEE FOLDOUT PAGE 323

CONNECTED *WHEN CONNECTED TO 1-10V DRIVER

13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70
12500230	RECESSED RING Ø70 H100

ECO LED GE

Smart lotis 82 IP54 LED **warm dim** GE





1X LED ARRAY INCL. 12W

! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX & SURFACE TUBED (SURFACE ONLY) GE

Friends of hue · III · 350mA · IP54 · GWT 960° · 0.36KG

	2000K - 3000K / CRI90+		
	15°	25°	40°
black struc	12444032	12444132	12444232
gold	12444046	12444146	12444246
white struc	12444009	12444109	12444209

DRIVER SEE DRIVER MATRIX

SMART COMBINATIONS SEE FOLDOUT PAGE 323

CONNECTED *WHEN CONNECTED TO 1-10V DRIVER

13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70
12500230	RECESSED RING Ø70 H100

Smart lotis

HALOGEN 12V | GE

Smart lotis 82 MR16 GE





1X QR-CBC 51 | GU 5.3 | MAX. 50W

! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX & SURFACE TUBED LARGE GE

12V | IP20 | GWT 960° | 0.10KG

black struc	**12450032**
white struc	**12450009**

SMART COMBINATIONS SEE FOLDOUT PAGE 323

INSTALLATION

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70
12500230	RECESSED RING Ø70 H100

HALOGEN 230V

Smart lotis 82 GU10





1X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX & SURFACE TUBED LARGE GE (WHEN USED WITH LED RETROFIT)

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.20KG

black struc	**12450132**
gold	**12450146**
white struc	**12450109**

SMART COMBINATIONS SEE FOLDOUT PAGE 323

CONNECTED

70000613	PHILIPS HUE RGB GU10 BULB 6.5W **
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

** NOT IN COMBINATION WITH SMART SURFACE BOX AND SURFACE TUBED

INSTALLATION

10889830	CONBOX 190X192X130X256
12290130	GYPKIT 190X190 - Ø70
12291030	GYPKIT 210X190-2XØ70
12500230	RECESSED RING Ø70 H100

ECO LED GE

Smart lotis 115 LED GE



1X LED ARRAY INCL. 16.25W

! 3500K ON REQUEST
! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX & SURFACE TUBED (SURFACE/SUSPENSION)

Friends of hue · III · 500mA · IP20 · GWT 960° · 0.46KG

	2700K / CRI90+			3000K / CRI90+			4000K / CRI90+		
	15°	25°	40°	15°	25°	40°	15°	25°	40°
black struc	12751232	12751032	12751332	12751432	12751532	12751632	12751732	12751132	12751832
gold	12751246	12751046	12751346	12751446	12751546	12751646	12751746	12751146	12751846
white struc	12751209	12751009	12751309	12751409	12751509	12751609	12751709	12751109	12751809

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	**500mA**	700mA	900mA
2700K / 25°	1065lm 11W	**1461lm 16.25W**	1943lm 23.6W	2290lm 31.2W
3000K / 25°	1046lm 11W	**1434lm 16.25W**	1908lm 23.6W	2250lm 31.2W
4000K / 25°	1219lm 11W	**1672lm 16.25W**	2224lm 23.6W	2626lm 31.2W

DRIVER — SEE DRIVER MATRIX

SMART COMBINATIONS — SEE FOLDOUT PAGE 323

CONNECTED — *WHEN CONNECTED TO 1-10V DRIVER

13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION

10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

ECO LED GE

Smart lotis 115 IP54 LED GE





1X LED ARRAY INCL. 16.25W

! 3500K ON REQUEST
! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX & SURFACE TUBED (SURFACE/SUSPENSION)

Friends of hue · III · 500mA · IP54 · GWT 960° · 0.48KG

	2700K / CRI90+			3000K / CRI90+			4000K / CRI90+		
	15°	25°	40°	15°	25°	40°	15°	25°	40°
black struc	12752232	12752032	12752332	12752432	12752532	12752632	12752732	12752132	12752832
gold	12752246	12752046	12752346	12752446	12752546	12752646	12752746	12752146	12752846
white struc	12752209	12752009	12752309	12752409	12752509	12752609	12752709	12752109	12752809

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	**500mA**	700mA	900mA
2700K / 25°	1029lm 11W	**1412lm 16.25W**	1878lm 23.6W	2213lm 31.2W
3000K / 25°	1011lm 11W	**1386lm 16.25W**	1844lm 23.6W	2175lm 31.2W
4000K / 25°	1178lm 11W	**1616lm 16.25W**	2150lm 23.6W	2538lm 31.2W

DRIVER — SEE DRIVER MATRIX

SMART COMBINATIONS — SEE FOLDOUT PAGE 323

CONNECTED — *WHEN CONNECTED TO 1-10V DRIVER

13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION

10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

Smart lotis

ECO LED GE

Smart lotis 115 diffuse IP54 LED GE



1X LED ARRAY INCL. 16.25W

! 3500K ON REQUEST
! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX & SURFACE TUBED (SURFACE/SUSPENSION)

Friends of hue | III | 500mA | IP54 | GWT 960° | 0.47KG

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	85°	85°	85°
black struc	**12753032**	**12753532**	**12753132**
gold	**12753046**	**12753546**	**12753146**
white struc	**12753009**	**12753509**	**12753109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	**500mA**	700mA	900mA
2700K / 25°	816lm 11W	**1119lm 16.25W**	1489lm 23.6W	1755lm 31.2W
3000K / 25°	801lm 11W	**1099lm 16.25W**	1462lm 23.6W	1724lm 31.2W
4000K / 25°	934lm 11W	**1281lm 16.25W**	1704lm 23.6W	2012lm 31.2W

DRIVER	SEE DRIVER MATRIX
SMART COMBINATIONS	SEE FOLDOUT PAGE 323

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

ECO LED GE

Smart lotis 115 adjustable LED GE





1X LED ARRAY INCL. 9.2W

! 3500K ON REQUEST
! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX & SURFACE TUBED (SURFACE ONLY)

Friends of hue | III | 500mA | IP20 | GWT 960° | 0.43KG

	2700K / CRI90+			3000K / CRI90+			4000K / CRI90+		
	15°	25°	40°	15°	25°	40°	15°	25°	40°
black struc	**12781232**	**12781032**	**12781332**	**12781432**	**12781532**	**12781632**	**12781732**	**12781132**	**12781832**
gold	**12781246**	**12781046**	**12781346**	**12781446**	**12781546**	**12781646**	**12781746**	**12781146**	**12781846**
white struc	**12781209**	**12781009**	**12781309**	**12781409**	**12781509**	**12781609**	**12781709**	**12781109**	**12781809**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	**500mA**
2700K / 25°	554lm 6.2W	**744lm 9.2W**
3000K / 25°	576lm 6.2W	**773lm 9.2W**
4000K / 25°	630lm 6.2W	**792lm 9.2W**

DRIVER	SEE DRIVER MATRIX
SMART COMBINATIONS	SEE FOLDOUT PAGE 323

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

ECO LED GE

Smart lotis 115 adjustable LED **warm dim** GE





1X LED ARRAY INCL. | 12W

! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX GE

Friends of hue | III | 350mA | IP20 | GWT 960° | 0.43KG

	2000K - 3000K / CRI90+		
	15°	25°	40°
black struc	12783032	12783132	12783232
gold	12783046	12783146	12783246
white struc	12783009	12783109	12783209

DRIVER SEE DRIVER MATRIX

SMART COMBINATIONS SEE FOLDOUT PAGE 323

CONNECTED *WHEN CONNECTED TO 1-10V DRIVER

13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION

10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

HALOGEN 230V

Smart lotis 115 adjustable GU10





1X QPAR 16 | GU10 | MAX. 50W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

! CAN BE COMBINED WITH SMART MASK
! CAN BE COMBINED WITH SMART SURFACE BOX

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.41KG

black struc	12782032
gold	12782046
white struc	12782009

SMART COMBINATIONS SEE FOLDOUT PAGE 323

CONNECTED

70000613	PHILIPS HUE RGB GU10 BULB 6.5W **
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

INSTALLATION

10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108
12810230	RECESSED RING Ø127 H100

** NOT IN COMBINATION WITH SMART SURFACE BOX AND SURFACE TUBED

Smart lotis

ECO LED GE

Smart lotis 160 IP54 LED GE



1X LED ARRAY INCL. 42W

! 3500K ON REQUEST
! CAN BE COMBINED WITH SMART MASK

	2700K / CRI90+				3000K / CRI90+				4000K / CRI90+			
	15°	25°	40°	60°	15°	25°	40°	60°	15°	25°	40°	60°
black struc	13014032	13014332	13014632	13026032	13014132	13014432	13014732	13026132	13014232	13014532	13014832	13026232
white struc	13014009	13014309	13014609	13026009	13014109	13014409	13014709	13026109	13014209	13014509	13014809	13026209

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	500mA	700mA	900mA
2700K / 25°	1801lm 16W	2453lm 23.5W	3044lm 30.8W
3000K / 25°	1868lm 16W	2543lm 23.5W	3157lm 30.8W
4000K / 25°	2019lm 16W	2759lm 23.5W	3413lm 30.8W

	1050mA	**1200mA**	1400mA
2700K / 25°	3521lm 36.3W	**3955lm 42W**	4553lm 49.7W
3000K / 25°	3651lm 36.3W	**4101lm 42W**	4721lm 49.7W
4000K / 25°	3947lm 36.3W	**4433lm 42W**	5104lm 49.7W

DRIVER SEE DRIVER MATRIX

SMART COMBINATIONS SEE FOLDOUT PAGE 323

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

ECO LED GE

Smart lotis 160 diffuse IP54 LED GE



1X LED ARRAY INCL. 42W

! 3500K ON REQUEST
! CAN BE COMBINED WITH SMART MASK

	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	60°	60°	60°
black struc	**13015032**	**13015132**	**13015232**
white struc	**13015009**	**13015109**	**13015209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	500mA	700mA	900mA
2700K / 25°	1494lm 16W	2034lm 23.5W	2525lm 30.8W
3000K / 25°	1549lm 16W	2110lm 23.5W	2618lm 30.8W
4000K / 25°	1675lm 16W	2280lm 23.5W	2830lm 30.8W

	1050mA	**1200mA**	1400mA
2700K / 25°	2920lm 36.3W	**3280lm 42W**	3776lm 49.7W
3000K / 25°	3028lm 36.3W	**3401lm 42W**	3916lm 49.7W
4000K / 25°	3273lm 36.3W	**3676lm 42W**	4233lm 49.7W

DRIVER SEE DRIVER MATRIX

SMART COMBINATIONS SEE FOLDOUT PAGE 323

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

Smart lotis

SMART LOTIS 115
SMART SURFACE BOX 115
SMART MASK 115

SMART LOTIS 115 ADJUSTABLE

SMART LOTIS 160 DIFFUSE
SMART MASK 160

Smart lotis

SMART LOTIS 115 WITH SMART SURFACE TUBED SUSPENDED
PRIVATE RESIDENCE, KORTRIJK (BE)

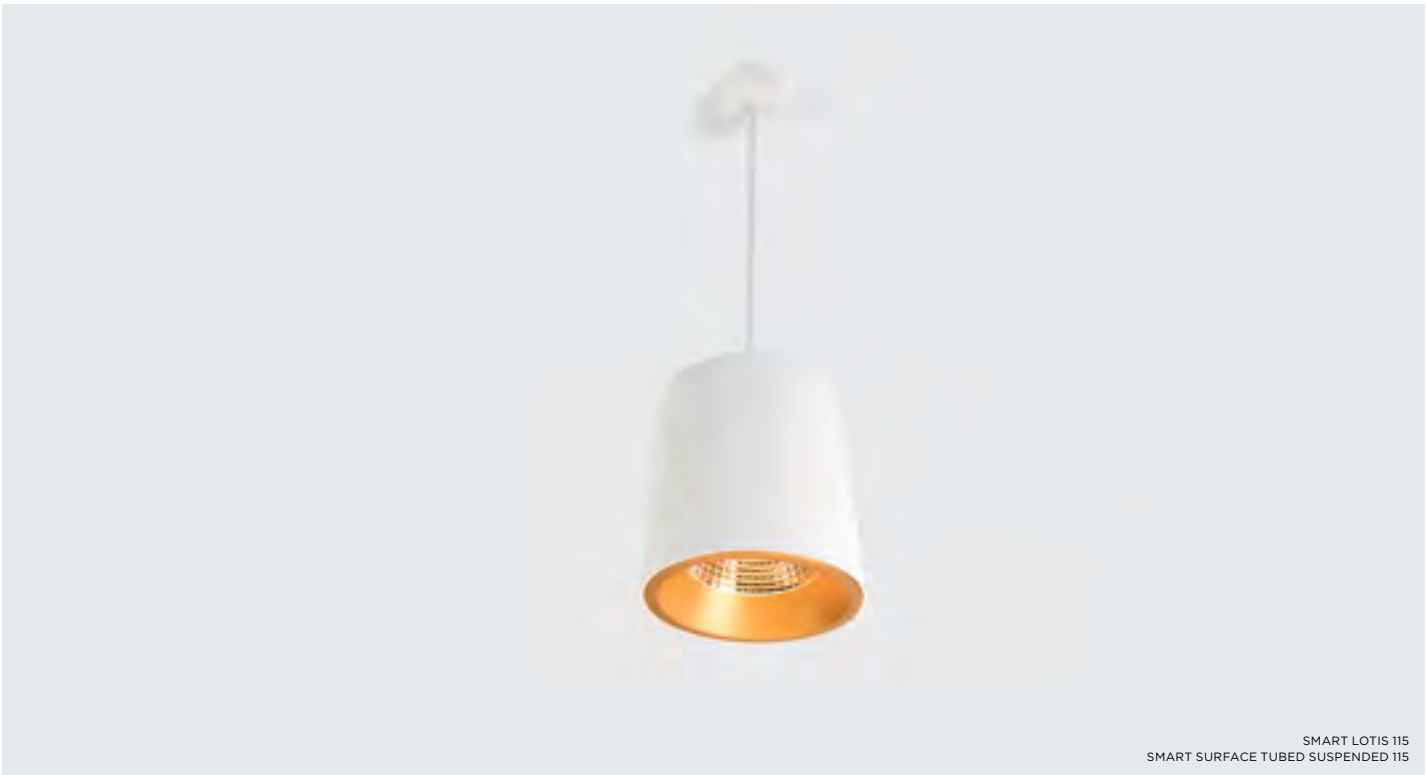

SMART LOTIS 115
SMART SURFACE TUBED SUSPENDED 115

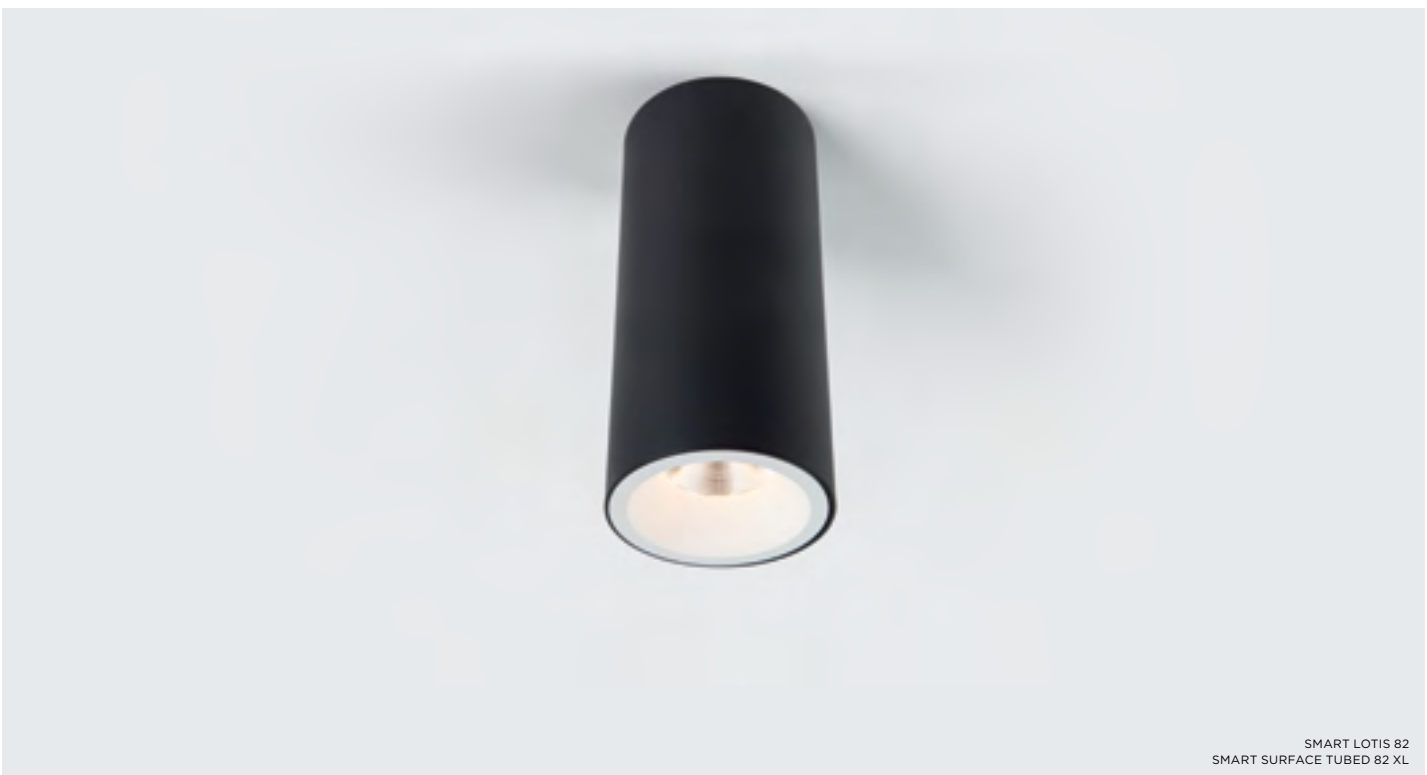

SMART LOTIS 82
SMART SURFACE TUBED 82 XL

Smart lotis

SMART LOTIS WITH SMART SURFACE BOX & MASK
PRIVATE RESIDENCE, ROTTERDAM (NL)
LINDA LEGRAND INTERIOR DESIGN

SMART LOTIS
EXPHAIR, SCHILDE (BE)
VIVA ARCHITECTURE

Smart lotis

SMART LOTIS
PRIVATE RESIDENCE, ROTTERDAM (NL)
VAN OMMEN HOFWEGEN

SMART LOTIS
BIT, EDE (NL)
QUUB INTERIOR CONCEPTS

Smart lotis

SMART LOTIS
SIGNAL IDUNA, KARLSRUHE (DE)
SASSAN PHILIPP HASCHEMI & ASSOCIATES

SMART LOTIS
WIGO4IT, DEN HAAG (NL)
ZENBER INTERIEUR ARCHITECTUUR BNI

Smart combinations

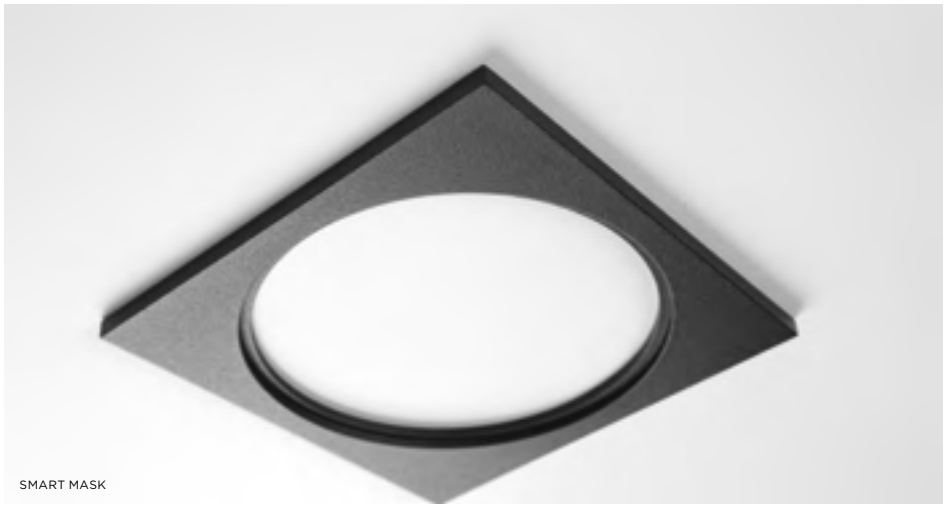

SMART MASK

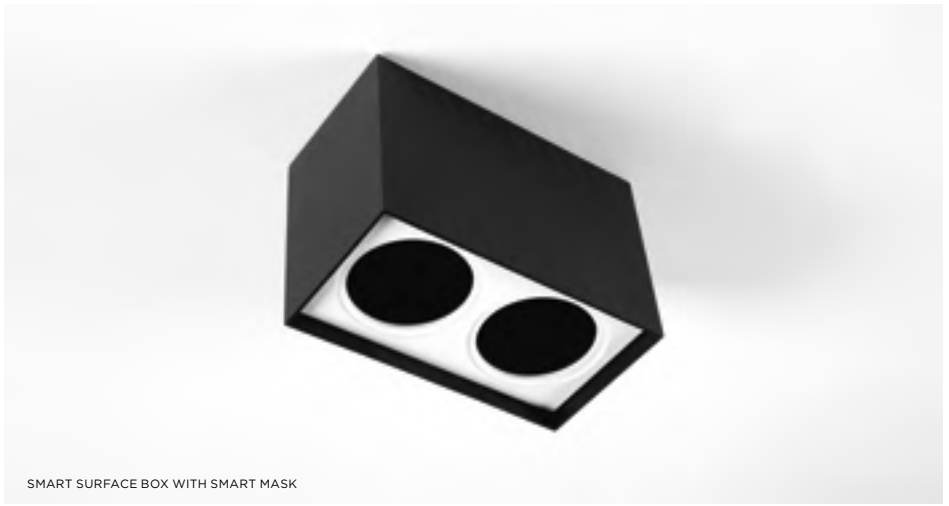

SMART SURFACE BOX WITH SMART MASK

SMART SURFACE TUBED

SMART SURFACE TUBED SUSPENDED

Smart combinations

OVERVIEW ACCESSORIES – RECESSED

type		color	source	ø 82 recessed ring 1X	ø 82 Smart mask ○●● 1X	ø 82 Smart mask ○●● 2X	ø 115 recessed ring 1X	ø 115 Smart mask ○●● 1X	ø 115 Smart mask ○●● 2X	ø 160 Smart mask ○● 1X
ø 82	fix	○ ● ●	LED GE	Ⓜ	Ⓜ	Ⓜ				
				Ⓜ	Ⓜ	Ⓜ				
			Gu10 Masterled	Ⓜ	Ⓜ	Ⓜ				
ø 115	adj.	○ ● ●	LED GE				Ⓜ	Ⓜ	Ⓜ	
							Ⓜ	Ⓜ	Ⓜ	
			Gu10 Masterled				Ⓜ	Ⓜ	Ⓜ	
	fix	○ ● ●	LED GE				Ⓜ	Ⓜ	Ⓜ	
							Ⓜ	Ⓜ	Ⓜ	
							Ⓜ	Ⓜ	Ⓜ	
							Ⓜ	Ⓜ	Ⓜ	
ø 160	fix	○ ●	LED GE							Ⓜ
										Ⓜ
										Ⓜ

OVERVIEW ACCESSORIES – SURFACE

type		color	source	ø 48 Smart surface tubed GE h 77mm 1X	ø 82 Smart surface box ○● GI h 130mm 1X 2X	ø 82 Smart surface box ○● GE h 130mm 1X 2X	ø 82 Smart tubed surface/suspension ○●● small / GE h 86mm 1X	large / GI h 130mm 1X	large / GE h 130mm 1X	x-large / GI h 190mm 1X	ø 115 Smart surface box ○● GI h 130mm 1X 2X	ø 115 Smart surface box ○● GE h 130mm 1X 2X	ø 115 Smart tubed surface/suspension ○●● GI h 130mm 1X
ø 48	fix	○ ●	high power LED	Ⓜ*									
ø 82	fix	○ ● ●	LED GE		Ⓜ	Ⓜ	Ⓜ	Ⓜ	Ⓜ	Ⓜ			
			Gu10 Masterled			Ⓜ			Ⓜ				
ø 115	adj.	○ ● ●	LED GE								Ⓜ	Ⓜ	Ⓜ**
			Gu10 Masterled									Ⓜ	
	fix	○ ● ●	LED GE								Ⓜ	Ⓜ	Ⓜ

○ white structure ● black structure ● brushed alu ● gold Ⓜ Smart combination

* not possible with Smart asy lotis 48
** not possible with Smart surface tubed suspension

Smart combinations

OVERVIEW ACCESSORIES – RECESSED



SMART 82
MASK 1X



SMART 82
MASK 2X



SMART 82
RECESSED RING



SMART 115
MASK 1X



SMART 115
MASK 2X



SMART 115
RECESSED RING



SMART 160
MASK 1X

OVERVIEW ACCESSORIES – SURFACE



SMART 48
SURFACE TUBED



SMART 82
SURFACE BOX 1X



SMART 82
SURFACE BOX 2X



SMART 82
SURFACE TUBED SMALL



SMART 82
SURFACE TUBED LARGE
SURFACE TUBED SUSPENDED LARGE



SMART 82
SURFACE TUBED XL
SURFACE TUBED SUSPENDED XL



SMART 115
SURFACE BOX 1X



SMART 115
SURFACE BOX 2X



SMART 115
SURFACE TUBED
SURFACE TUBED SUSPENDED

SMART MASK

SMART MASK 82

12500009	MASK 82 1X WHITE STRUC
12500032	MASK 82 1X BLACK STRUC
12500046	MASK 82 1X GOLD
12500109	MASK 82 2X WHITE STRUC
12500132	MASK 82 2X BLACK STRUC
12500146	MASK 82 2X GOLD

SMART MASK115

12810009	MASK 115 1X WHITE STRUC
12810032	MASK 115 1X BLACK STRUC
12810046	MASK 115 1X GOLD
12810109	MASK 115 2X WHITE STRUC
12810132	MASK 115 2X BLACK STRUC
12810146	MASK 115 2X GOLD

SMART MASK 160

13040009	MASK 160 1X WHITE STRUC
13040032	MASK 160 1X BLACK STRUC

SMART SURFACE BOX

SMART SURFACE BOX 82 LED - GI

12514009	SURFACE BOX 82 GI FOR 1X LED GE WHITE STRUC
12514032	SURFACE BOX 82 GI FOR 1X LED GE BLACK STRUC
12514109	SURFACE BOX 82 1-10V/PUSHDIM GI FOR 1X LED GE WHITE STRUC
12514132	SURFACE BOX 82 1-10V/PUSHDIM GI FOR 1X LED GE BLACK STRUC
12515009	SURFACE BOX 82 GI FOR 2X LED GE WHITE STRUC
12515032	SURFACE BOX 82 GI FOR 2X LED GE BLACK STRUC
12515109	SURFACE BOX 82 1-10V/PUSHDIM GI FOR 2X LED GE WHITE STRUC
12515132	SURFACE BOX 82 1-10V/PUSHDIM GI FOR 2X LED GE BLACK STRUC

SMART SURFACE BOX 82 LED & GU10 - GE

12516009	SURFACE BOX 82 GE FOR 1X LED RETROFIT ES50 WHITE STRUC
12516032	SURFACE BOX 82 GE FOR 1X LED RETROFIT ES50 BLACK STRUC
12516109	SURFACE BOX 82 GE FOR 2X LED RETROFIT ES50 WHITE STRUC
12516132	SURFACE BOX 82 GE FOR 2X LED RETROFIT ES50 BLACK STRUC

SMART SURFACE BOX 115 LED - GI

12800009	SURFACE BOX 115 GI FOR 1X LED GE WHITE STRUC
12800032	SURFACE BOX 115 GI FOR 1X LED GE BLACK STRUC
12800109	SURFACE BOX 115 1-10V/PUSHDIM GI FOR 1X LED GE WHITE STRUC
12800132	SURFACE BOX 115 1-10V/PUSHDIM GI FOR 1X LED GE BLACK STRUC
12800209	SURFACE BOX 115 DALI/PUSHDIM GI FOR 1X LED GE WHITE STRUC
12800232	SURFACE BOX 115 DALI/PUSHDIM GI FOR 1X LED GE BLACK STRUC
12801009	SURFACE BOX 115 GI FOR 2X LED GE WHITE STRUC
12801032	SURFACE BOX 115 GI FOR 2X LED GE BLACK STRUC
12801109	SURFACE BOX 115 1-10V/PUSHDIM GI FOR 2X LED GE WHITE STRUC
12801132	SURFACE BOX 115 1-10V/PUSHDIM GI FOR 2X LED GE BLACK STRUC
12801209	SURFACE BOX 115 DALI/PUSHDIM GI FOR 2X LED GE WHITE STRUC
12801232	SURFACE BOX 115 DALI/PUSHDIM GI FOR 2X LED GE BLACK STRUC

SMART SURFACE BOX 115 LED & GU10 - GE

12802009	SURFACE BOX 115 GE FOR 1X LED WHITE STRUC
12802032	SURFACE BOX 115 GE FOR 1X LED BLACK STRUC
12802109	SURFACE BOX 115 GE FOR 2X LED WHITE STRUC
12802132	SURFACE BOX 115 GE FOR 2X LED BLACK STRUC

! DO NOT FORGET TO ORDER SMART MASK

SMART SURFACE TUBED

SMART SURFACE TUBED 48 - GE

12900009	SURFACE TUBED 48 GE FOR 1X LED WHITE STRUC
12900032	SURFACE TUBED 48 GE FOR 1X LED BLACK STRUC

SMART SURFACE TUBED 82 - GI

12842009	SURFACE TUBED SUSPENSION 82 LARGE LED GI WHITE STRUC
12842024	SURFACE TUBED SUSPENSION 82 LARGE LED GI BRUSHED ALU
12842032	SURFACE TUBED SUSPENSION 82 LARGE LED GI BLACK STRUC
12842209	SURFACE TUBED SUSPENSION 82 XL LED TRE DIM GI WHITE STRUC
12842224	SURFACE TUBED SUSPENSION 82 XL LED TRE DIM GI BRUSHED ALU
12842232	SURFACE TUBED SUSPENSION 82 XL LED TRE DIM GI BLACK STRUC
12842309	SURFACE TUBED SUSPENSION 82 XL LED 1-10V/PUSHDIM GI WHSTR
12842324	SURFACE TUBED SUSPENSION 82 XL LED 1-10V/PUSHDIM GI BRUSH ALU
12842332	SURFACE TUBED SUSPENSION 82 XL LED 1-10V/PUSHDIM GI BLSTR
12842409	SURFACE TUBED SUSPENSION 82 XL LED DALI GI WHITE STRUC
12842424	SURFACE TUBED SUSPENSION 82 XL LED DALI GI BRUSHED ALU
12842432	SURFACE TUBED SUSPENSION 82 XL LED DALI GI BLACK STRUC
12843009	SURFACE TUBED 82 XL LED TRE DIM GI WHITE STRUC
12843024	SURFACE TUBED 82 XL LED TRE DIM GI BRUSHED ALU
12843032	SURFACE TUBED 82 XL LED TRE DIM GI BLACK STRUC
12843109	SURFACE TUBED 82 XL LED 1-10V/PUSHDIM GI WHITE STRUC
12843124	SURFACE TUBED 82 XL LED 1-10V/PUSHDIM GI BRUSHED ALU
12843132	SURFACE TUBED 82 XL LED 1-10V/PUSHDIM GI BLACK STRUC
12843209	SURFACE TUBED 82 XL LED DALI GI WHITE STRUC
12843224	SURFACE TUBED 82 XL LED DALI GI BRUSHED ALU
12843232	SURFACE TUBED 82 XL LED DALI GI BLACK STRUC
12844009	SURFACE TUBED 82 LARGE LED GI WHITE STRUC
12844024	SURFACE TUBED 82 LARGE LED GI BRUSHED ALU
12844032	SURFACE TUBED 82 LARGE LED GI BLACK STRUC

SMART SURFACE TUBED 82 - GE

12841009	SURFACE TUBED 82 SMALL GE FOR 1X LED WHITE STRUC
12841024	SURFACE TUBED 82 SMALL GE FOR 1X LED ALU BRUSHED
12841032	SURFACE TUBED 82 SMALL GE FOR 1X LED BLACK STRUC
12845009	SURFACE TUBED 82 LARGE LED GE WHITE STRUC
12845024	SURFACE TUBED 82 LARGE LED GE BRUSHED ALU
12845032	SURFACE TUBED 82 LARGE LED GE BLACK STRUC

SMART SURFACE TUBED 115 LED - GI

13140109	SURFACE TUBED 115 LED TRE DIM GI WHITE STRUC
13140124	SURFACE TUBED 115 LED TRE DIM GI BRUSHED ALU
13140132	SURFACE TUBED 115 LED TRE DIM GI BLACK STRUC
13140209	SURFACE TUBED 115 LED 1-10V/PUSHDIM GI WHITE STRUC
13140224	SURFACE TUBED 115 LED 1-10V/PUSHDIM GI BRUSHED ALU
13140232	SURFACE TUBED 115 LED 1-10V/PUSHDIM GI BLACK STRUC
13140309	SURFACE TUBED 115 LED DALI GI WHITE STRUC
13140324	SURFACE TUBED 115 LED DALI GI BRUSHED ALU
13140332	SURFACE TUBED 115 LED DALI GI BLACK STRUC
13141109	SURFACE TUBED SUSPENSION 115 LED TRE DIM GI WHITE STRUC
13141124	SURFACE TUBED SUSPENSION 115 LED TRE DIM GI BRUSHED ALU
13141132	SURFACE TUBED SUSPENSION 115 LED TRE DIM GI BLACK STRUC
13141209	SURFACE TUBED SUSPENSION 115 LED 1-10V/PUSHDIM GI WHSTR
13141224	SURFACE TUBED SUSPENSION 115 LED 1-10V/PUSHDIM GI BRUSH ALU
13141232	SURFACE TUBED SUSPENSION 115 LED 1-10V/PUSHDIM GI BLSTR
13141309	SURFACE TUBED SUSPENSION 115 LED DALI GI WHITE STRUC
13141324	SURFACE TUBED SUSPENSION 115 LED DALI GI BRUSHED ALU
13141332	SURFACE TUBED SUSPENSION 115 LED DALI GI BLACK STRUC

Soufflé

Its amorphous shape makes Soufflé, a dimmable ceiling fixture, highly reminiscent of a ring-shaped cake. The lamp proves that organic shapes are not only found in nature.

SUPERMODULAR.COM/EN/SOUFFLE

ECO LED GI

Soufflé suspension down LED GI





1X LED INCL. 21.7W

! TEXTILE WOVEN POWER FEED CABLE OPTIONAL

Friends of hue | 230V | IP40 | GWT 650° | 6.90KG

TRAILING EDGE DIMMABLE	3000K / CRI80
black (white struc interior)	**11810562**
shiny black (white struc interior)	**11810551**
shiny white (white struc interior)	**11810549**
white (white struc interior)	**11810561**

1-10V*	3000K / CRI80
black (white struc interior)	**11815562**
shiny black (white struc interior)	**11815551**
shiny white (white struc interior)	**11815549**
white (white struc interior)	**11815561**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(shiny white (white struc interior))

3000K/	**1866lm 28W**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
11819913	POWERFEED 4M - 5X 0.75 TEXTILE WOVEN - RED
11819959	POWERFEED 4M - 5X 0.75 TEXTILE WOVEN - BLACK/WHITE

Soufflé

SOUFFLE
DOEN KAPPERS, NIEUWEGEIN (NL)
DESIGN LABELS

SOUFFLE
BNP PARIBAS, AMSTERDAM (NL)
MARTIJN VELDMAN

Spektra

design in cooperation with florent coirier

"We believe in objects with meaning, so that they give meaning to everyday lives," says French designer Florent Coirier. Inspired by this belief, Coirier designed Spektra: a very precise Modular trackspot for retail environments.

Spektra is the first trackspot in the Modular portfolio with an adjustable zoom lens. Users can easily adjust the beam angle and change the inclination of the luminaire, ensuring that it only highlights targeted areas. The light quality is excellent (CRI 90 or more), mimicking natural light – just what retailers need to put their products in the spotlight.

SUPERMODULAR.COM/EN/SPEKTRA

NEW ECO LED GI

Spektra track LED 2700K 15° - 55° GI

230V | L,C | IP20 | GWT 960° | 2.48KG



1X LED ARRAY INCL. 26.8W

TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+
	15°-55°	15°-55°
black struc	**13261032**	**13261132**
white struc	**13261009**	**13261109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(20° white struc)

2700K / 20°	**1928lm 30W**
3000K / 20°	**2043lm 30W**

TRACK SEE BELOW

TRACK FOR ADDITIONAL TRACK COMPONENTS SEE GOODIES

11240101	TRACK PROFILE SURFACE 2M SHINY WHITE	**11240601**	TRACK POWER FEED SURFACE LEFT SHINY WHITE	**11241701**	TRACK POWER FEED RECESSED LEFT SHINY WHITE
11240102	TRACK PROFILE SURFACE 2M BLACK	**11240602**	TRACK POWER FEED SURFACE LEFT BLACK	**11241702**	TRACK POWER FEED RECESSED LEFT BLACK
11240105	TRACK PROFILE SURFACE 2M ALU	**11240605**	TRACK POWER FEED SURFACE LEFT ALU	**11241705**	TRACK POWER FEED RECESSED LEFT ALU
11240301	TRACK PROFILE RECESSED 2M SHINY WHITE	**11241401**	TRACK COVER ENDPLATE SHINY WHITE	**11242201**	TRACK PROFILE SURFACE 1M SHINY WHITE
11240302	TRACK PROFILE RECESSED 2M BLACK	**11241402**	TRACK COVER ENDPLATE BLACK	**11242202**	TRACK PROFILE SURFACE 1M BLACK
11240305	TRACK PROFILE RECESSED 2M ALU	**11241405**	TRACK COVER ENDPLATE ALU	**11242205**	TRACK PROFILE SURFACE 1M ALU
11240501	TRACK POWER FEED SURFACE RIGHT SHINY WHITE	**11241601**	TRACK POWER FEED RECESSED RIGHT SHINY WHITE	**11242401**	TRACK PROFILE RECESSED 1M SHINY WHITE
11240502	TRACK POWER FEED SURFACE RIGHT BLACK	**11241602**	TRACK POWER FEED RECESSED RIGHT BLACK	**11242402**	TRACK PROFILE RECESSED 1M BLACK
11240505	TRACK POWER FEED SURFACE RIGHT ALU	**11241605**	TRACK POWER FEED RECESSED RIGHT ALU	**11242405**	TRACK PROFILE RECESSED 1M ALU

Spektra

SPEKTRA
KNOKKE (BE)

SPEKTRA
KNOKKE (BE)

see also:
p. 438

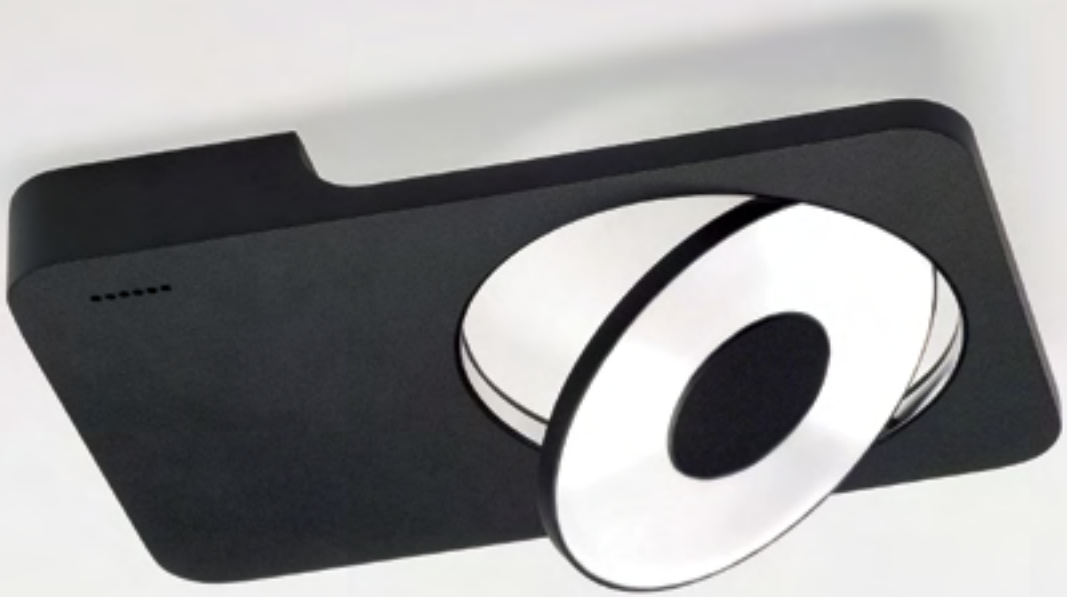

Spock

Spock is part of an extra-terrestrial population at Modular, united by their powerful, ultra-thin LED lighting disc. Spock conceals all its ingenious workings in one slender housing. Here, the design reinforces its functionality. A unique tilting system makes the lighting disc highly directional. Be creative with Spock by placing it in a straight line or arranging it in a more playful cluster. Spock is available in different beam angles and different colour temperatures. Spock track version is well suited for a retail environment.

design in cooperation with couvreur-devos

SUPERMODULAR.COM/EN/SPOCK

ECO LED GI

Spock track LED GI



1X LED DISC INCL.

NOT DIMMABLE	2700K / CRI80		3000K / CRI80	
	30°	55°	30°	55°
black struc	11395132	11395232	11392132	11392232
white struc	11395109	11395209	11392109	11392209

LUMINAIRE OUTPUT & POWER CONSUMPTION
(30° white struc)

2700K / 30°	**977lm 17W**
3000K / 30°	**766lm 20.5W**

TRACK SEE BELOW

! NOT APPLICABLE WITH SUSPENDED TRACK
! 4000K ON REQUEST

ECO LED GI

Spock foot LED GI



1X LED DISC INCL.

! 4000K ON REQUEST

NOT DIMMABLE	2700K / CRI80		3000K / CRI80	
	30°	55°	30°	55°
black struc	11393132	11393232	11390132	11390232
white struc	11393109	11393209	11390109	11390209

DALI/PUSHDIM/1-10V*	2700K / CRI80		3000K / CRI80	
	30°	55°	30°	55°
black struc	11393532	11393632	11390532	11390632
white struc	11393509	11393609	11390509	11390609

LUMINAIRE OUTPUT & POWER CONSUMPTION
(30° white struc)

2700K / 30°	**977lm 17W**
3000K / 30°	**766lm 20.5W**

CONNECTED *ONLY IN COMBINATION WITH 1-10V

13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

TRACK FOR ADDITIONAL TRACK COMPONENTS SEE GOODIES

11240101	TRACK PROFILE SURFACE 2M SHINY WHITE	**11240601**	TRACK POWER FEED SURFACE LEFT SHINY WHITE	**11241701**	TRACK POWER FEED RECESSED LEFT SHINY WHITE
11240102	TRACK PROFILE SURFACE 2M BLACK	**11240602**	TRACK POWER FEED SURFACE LEFT BLACK	**11241702**	TRACK POWER FEED RECESSED LEFT BLACK
11240105	TRACK PROFILE SURFACE 2M ALU	**11240605**	TRACK POWER FEED SURFACE LEFT ALU	**11241705**	TRACK POWER FEED RECESSED LEFT ALU
11240301	TRACK PROFILE RECESSED 2M SHINY WHITE	**11241401**	TRACK COVER ENDPLATE SHINY WHITE	**11242201**	TRACK PROFILE SURFACE 1M SHINY WHITE
11240302	TRACK PROFILE RECESSED 2M BLACK	**11241402**	TRACK COVER ENDPLATE BLACK	**11242202**	TRACK PROFILE SURFACE 1M BLACK
11240305	TRACK PROFILE RECESSED 2M ALU	**11241405**	TRACK COVER ENDPLATE ALU	**11242205**	TRACK PROFILE SURFACE 1M ALU
11240501	TRACK POWER FEED SURFACE RIGHT SHINY WHITE	**11241601**	TRACK POWER FEED RECESSED RIGHT SHINY WHITE	**11242401**	TRACK PROFILE RECESSED 1M SHINY WHITE
11240502	TRACK POWER FEED SURFACE RIGHT BLACK	**11241602**	TRACK POWER FEED RECESSED RIGHT BLACK	**11242402**	TRACK PROFILE RECESSED 1M BLACK
11240505	TRACK POWER FEED SURFACE RIGHT ALU	**11241605**	TRACK POWER FEED RECESSED RIGHT ALU	**11242405**	TRACK PROFILE RECESSED 1M ALU

Spock

SPOCK
INGENIUM, BRUGGE (BE)
ARCHITECTEN GROEP III

SPOCK
INGENIUM, BRUGGE (BE)
ARCHITECTEN GROEP III

Stove

A fixture which is both sleek and playful. Its name wasn't chosen at random: from below, you can clearly see the outline of a stove, with the asymmetric foot as the flue. Stove is the result of pure geometry and has been perfected down to the smallest detail. Although the lamp has robust, clearly defined lines that do not merge into each other, it still retains a perfect balance. The unusual thing about Stove is the two pivot points which make this spotlight a particularly versatile and highly directional light source.

design in cooperation with couvreur-devos

SUPERMODULAR.COM/EN/STOVE

ECO LED GE

Stove LED GE



1X LED ARRAY INCL. 16.2W

! CAN BE USED WITH GEAR ACCESS COVER PLATE

	2700K / CRI90+
	25°
black struc	**11870132**
white struc	**11870109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	**500mA**
2700K / 25°	940lm 11W	**1290lm 16.2W**

DRIVER	SEE DRIVER MATRIX

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
11932009	GEAR ACCESS COVERPLATE (CUTOUT SIZE Ø127 H130)
10203009	BASE FLANGE Ø90 H3 - WHITE STRUC
10203032	BASE FLANGE Ø90 H3 - BLACK STRUC
10204009	BASE FLANGE TUBE Ø90 H20 - WHITE STRUC
10204032	BASE FLANGE TUBE Ø90 H20 - BLACK STRUC

OPTICAL	
11949730	REFLECTOR LED Ø80 FLOOD
11949930	REFLECTOR LED Ø80 SPOT

ECO LED GI

Stove LED GI





1X LED ARRAY INCL. 11W

LEADING/TRAILING EDGE DIMMABLE	2700K / CRI90+
	25°
black struc	**11873132**
white struc	**11873109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

2700K / 25°	**940lm 13.5W**

INSTALLATION	
10203009	BASE FLANGE Ø90 H3 - WHITE STRUC
10203032	BASE FLANGE Ø90 H3 - BLACK STRUC
10204009	BASE FLANGE TUBE Ø90 H20 - WHITE STRUC
10204032	BASE FLANGE TUBE Ø90 H20 - BLACK STRUC

OPTICAL	
11949730	REFLECTOR LED Ø80 FLOOD
11949930	REFLECTOR LED Ø80 SPOT

Stove

ECO LED GI

Stove track LED GI

1X LED ARRAY INCL. 11W



230V | L,C | IP20 | GWT 960° | 1.20KG

LEADING/TRAILING EDGE DIMMABLE	2700K / CRI90+
	25°
black struc	**11877132**
white struc	**11877109**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

2700K / 25°	**940lm 13.5W**

TRACK SEE BELOW

OPTICAL

11949730	REFLECTOR LED Ø80 FLOOD
11949930	REFLECTOR LED Ø80 SPOT

TRACK FOR ADDITIONAL TRACK COMPONENTS SEE GOODIES

11240101	TRACK PROFILE SURFACE 2M SHINY WHITE
11240102	TRACK PROFILE SURFACE 2M BLACK
11240105	TRACK PROFILE SURFACE 2M ALU
11240301	TRACK PROFILE RECESSED 2M SHINY WHITE
11240302	TRACK PROFILE RECESSED 2M BLACK
11240305	TRACK PROFILE RECESSED 2M ALU
11240501	TRACK POWER FEED SURFACE RIGHT SHINY WHITE
11240502	TRACK POWER FEED SURFACE RIGHT BLACK
11240505	TRACK POWER FEED SURFACE RIGHT ALU
11240601	TRACK POWER FEED SURFACE LEFT SHINY WHITE
11240602	TRACK POWER FEED SURFACE LEFT BLACK
11240605	TRACK POWER FEED SURFACE LEFT ALU
11241401	TRACK COVER ENDPLATE SHINY WHITE
11241402	TRACK COVER ENDPLATE BLACK
11241405	TRACK COVER ENDPLATE ALU
11241601	TRACK POWER FEED RECESSED RIGHT SHINY WHITE
11241602	TRACK POWER FEED RECESSED RIGHT BLACK
11241605	TRACK POWER FEED RECESSED RIGHT ALU
11241701	TRACK POWER FEED RECESSED LEFT SHINY WHITE
11241702	TRACK POWER FEED RECESSED LEFT BLACK
11241705	TRACK POWER FEED RECESSED LEFT ALU
11242201	TRACK PROFILE SURFACE 1M SHINY WHITE
11242202	TRACK PROFILE SURFACE 1M BLACK
11242205	TRACK PROFILE SURFACE 1M ALU
11242401	TRACK PROFILE RECESSED 1M SHINY WHITE
11242402	TRACK PROFILE RECESSED 1M BLACK
11242405	TRACK PROFILE RECESSED 1M ALU

STOVE
BROUWERIJ DEKONINCK, ANTWERPEN (BE)

Stove

STOVE
LUXBAG, HELSINKI (FI)
PURE DESIGN

STOVE
BROUWERIJ DEKONINCK, ANTWERPEN (BE)

Thub metal

Thub metal is an organic recessed spotlight with a tilting system which makes it highly directional. Its sloping shape integrates beautifully into any ceiling or wall. The 'AR111' (GE) version of the Thub metal 215 can be combined with the new M-LED 111.

SUPERMODULAR.COM/EN/THUB-METAL

HALOGEN 12V | GE

Thub metal 215 1x AR111 GE





1X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111

12V | IP20 | GWT 960° | 1.00KG

white struc	11021009

M-LED	SEE BELOW

INSTALLATION	
11029430	CONBOX 300X300X185X338
11029630	GYPKIT 300X338 - Ø195

HALOGEN 12V | GE

Thub metal 215 2x AR111 GE





2X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111

12V | IP20 | GWT 960° | 2.00KG

white struc	11022009

M-LED	SEE BELOW

INSTALLATION	
11029530	CONBOX 300X445X185X338
11029130	GYPKIT 445X338 - 2XØ195
11030430	GYPKIT 440X396 - Ø356

M-LED					
11298002	M-LED 111 2700K SPOT GE BLACK MATT	**11298302**	M-LED 111 3000K SPOT GE BLACK MATT	**11298602**	M-LED 111 4000K SPOT GE BLACK MATT
11298009	M-LED 111 2700K SPOT GE WHITE STRUC	**11298309**	M-LED 111 3000K SPOT GE WHITE STRUC	**11298609**	M-LED 111 4000K SPOT GE WHITE STRUC
11298024	M-LED 111 2700K SPOT GE BRUSHED ALU	**11298324**	M-LED 111 3000K SPOT GE BRUSHED ALU	**11298624**	M-LED 111 4000K SPOT GE BRUSHED ALU
11298102	M-LED 111 2700K MEDIUM GE BLACK MATT	**11298402**	M-LED 111 3000K MEDIUM GE BLACK MATT	**11298702**	M-LED 111 4000K MEDIUM GE BLACK MATT
11298109	M-LED 111 2700K MEDIUM GE WHITE STRUC	**11298409**	M-LED 111 3000K MEDIUM GE WHITE STRUC	**11298709**	M-LED 111 4000K MEDIUM GE WHITE STRUC
11298124	M-LED 111 2700K MEDIUM GE BRUSHED ALU	**11298424**	M-LED 111 3000K MEDIUM GE BRUSHED ALU	**11298724**	M-LED 111 4000K MEDIUM GE BRUSHED ALU
11298202	M-LED 111 2700K FLOOD GE BLACK MATT	**11298502**	M-LED 111 3000K FLOOD GE BLACK MATT	**11298802**	M-LED 111 4000K FLOOD GE BLACK MATT
11298209	M-LED 111 2700K FLOOD GE WHITE STRUC	**11298509**	M-LED 111 3000K FLOOD GE WHITE STRUC	**11298809**	M-LED 111 4000K FLOOD GE WHITE STRUC
11298224	M-LED 111 2700K FLOOD GE BRUSHED ALU	**11298524**	M-LED 111 3000K FLOOD GE BRUSHED ALU	**11298824**	M-LED 111 4000K FLOOD GE BRUSHED ALU

Thub metal

THUB METAL
NR78, BERGEN (NL)
DESIGN LABELS

THUB METAL
DN&S, BRUGGE (BE)
3 ARCHITECTEN / PHILIP SIMOEN INTERIEUR

United

United is the ultimate tribute to the beauty of the fluorescent lamp. It is its simplicity which makes this luminaire so special: a bare seamless fluorescent tube lamp in a sleek U-shaped housing which can be mounted on the ceiling (surface or suspension). Available in white and/or black, United comes with one or two lamps and can be ordered with or without a U-shaped cover.

design in cooperation with couvreur-devos

SUPERMODULAR.COM/EN/UNITED

ECO FLUORESCENT GI

United 1x 21/39W GI



1X T16 SLS | G5 | 21/39W

! SUSPENSION KIT OPTIONAL

Friends of hue | 230V | IP20 | GWT 960° | 3.00KG

NOT DIMMABLE	
black struc (black interior)	**11808648**
black struc (white struc interior)	**11808647**
white struc (black interior)	**11808629**
white struc (white struc interior)	**11808609**

1-10V*	
black struc (black interior)	**11808848**
black struc (white struc interior)	**11808847**
white struc (black interior)	**11808829**
white struc (white struc interior)	**11808809**

DALI/PUSHDIM	
black struc (black interior)	**11808748**
black struc (white struc interior)	**11808747**
white struc (black interior)	**11808729**
white struc (white struc interior)	**11808709**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
11060709	SUSPENSION KIT 4M - 3X 0.75 (2 CABLES) - WHITE STRUC
11060732	SUSPENSION KIT 4M - 3X 0.75 (2 CABLES) - BLACK STRUC
11061709	SUSPENSION KIT 4M - 5X 0.75 (2 CABLES) - WHITE STRUC
11061732	SUSPENSION KIT 4M - 5X 0.75 (2 CABLES) - BLACK STRUC

ECO FLUORESCENT GI

United 1x 28/54W GI



1X T16 SLS | G5 | 28/54W

! SUSPENSION KIT OPTIONAL

Friends of hue | 230V | IP20 | GWT 960° | 4.80KG

NOT DIMMABLE	
black struc (black interior)	**11808348**
black struc (white struc interior)	**11808347**
white struc (black interior)	**11808329**
white struc (white struc interior)	**11808309**

1-10V*	
black struc (black interior)	**11808548**
black struc (white struc interior)	**11808547**
white struc (black interior)	**11808529**
white struc (white struc interior)	**11808509**

DALI/PUSHDIM	
black struc (black interior)	**11808448**
black struc (white struc interior)	**11808447**
white struc (black interior)	**11808429**
white struc (white struc interior)	**11808409**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
11060709	SUSPENSION KIT 4M - 3X 0.75 (2 CABLES) - WHITE STRUC
11060732	SUSPENSION KIT 4M - 3X 0.75 (2 CABLES) - BLACK STRUC
11061709	SUSPENSION KIT 4M - 5X 0.75 (2 CABLES) - WHITE STRUC
11061732	SUSPENSION KIT 4M - 5X 0.75 (2 CABLES) - BLACK STRUC

United

ECO FLUORESCENT GI

United 2x 21/39W GI



2X T16 SLS | G5 | 21/39W

! SUSPENSION KIT OPTIONAL

Friends of hue | 230V | IP20 | GWT 960° | 4.20KG

NOT DIMMABLE	
black struc (black interior)	**11800248**
black struc (white struc interior)	**11800247**
white struc (black interior)	**11800229**
white struc (white struc interior)	**11800209**

1-10V*	
black struc (black interior)	**11805148**
black struc (white struc interior)	**11805147**
white struc (black interior)	**11805129**
white struc (white struc interior)	**11805109**

DALI/PUSHDIM	
black struc (black interior)	**11800348**
black struc (white struc interior)	**11800347**
white struc (black interior)	**11800329**
white struc (white struc interior)	**11800309**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
11060709	SUSPENSION KIT 4M - 3X 0.75 (2 CABLES) - WHITE STRUC
11060732	SUSPENSION KIT 4M - 3X 0.75 (2 CABLES) - BLACK STRUC
11061709	SUSPENSION KIT 4M - 5X 0.75 (2 CABLES) - WHITE STRUC
11061732	SUSPENSION KIT 4M - 5X 0.75 (2 CABLES) - BLACK STRUC

ECO FLUORESCENT GI

United 2x 28/54W GI



2X T16 SLS | G5 | 28/54W

! SUSPENSION KIT OPTIONAL

Friends of hue | 230V | IP20 | GWT 960° | 6.30KG

NOT DIMMABLE	
black struc (black interior)	**11800048**
black struc (white struc interior)	**11800047**
white struc (black interior)	**11800029**
white struc (white struc interior)	**11800009**

1-10V*	
black struc (black interior)	**11805048**
black struc (white struc interior)	**11805047**
white struc (black interior)	**11805029**
white struc (white struc interior)	**11805009**

DALI/PUSHDIM	
black struc (black interior)	**11800148**
black struc (white struc interior)	**11800147**
white struc (black interior)	**11800129**
white struc (white struc interior)	**11800109**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
11060709	SUSPENSION KIT 4M - 3X 0.75 (2 CABLES) - WHITE STRUC
11060732	SUSPENSION KIT 4M - 3X 0.75 (2 CABLES) - BLACK STRUC
11061709	SUSPENSION KIT 4M - 5X 0.75 (2 CABLES) - WHITE STRUC
11061732	SUSPENSION KIT 4M - 5X 0.75 (2 CABLES) - BLACK STRUC

ECO FLUORESCENT GI

United uncovered 1x 21/39W GI



1X T16 SLS | G5 | 21/39W

NOT DIMMABLE	
black	**11807002**
white struc	**11807009**

1-10V*	
black	**11807602**
white struc	**11807609**

DALI/PUSHDIM	
black	**11807302**
white struc	**11807309**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

ECO FLUORESCENT GI

United uncovered 1x 28/54W GI



1X T16 SLS | G5 | 28/54W

NOT DIMMABLE	
black	**11806902**
white struc	**11806909**

1-10V*	
black	**11807502**
white struc	**11807509**

DALI/PUSHDIM	
black	**11807202**
white struc	**11807209**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

United

ECO FLUORESCENT GI

United uncovered 2x 21/39W GI



2X T16 SLS | G5 | 21/39W

NOT DIMMABLE	
black	**11801502**
white struc	**11801509**

1-10V*	
black	**11805502**
white struc	**11805509**

DALI/PUSHDIM	
black	**11801902**
white struc	**11801909**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

ECO FLUORESCENT GI

United uncovered 2x 28/54W GI



2X T16 SLS | G5 | 28/54W

NOT DIMMABLE	
black	**11801402**
white struc	**11801409**

1-10V*	
black	**11805402**
white struc	**11805409**

DALI/PUSHDIM	
black	**11801802**
white struc	**11801809**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

UNITED UNCOVERED

United

UNITED
POTRELL, IZEGEM (BE)
COUVREUR&DEVOS

UNITED, NOMAD
PRIVATE RESIDENCE, OEGSTGEEST (NL)
DIRK VAN BERKEL

United asy

The simplicity of United asy is what makes this luminaire so special: one bare TL5 fluorescent tube lamp in a sleek U-shaped asymmetrical housing creating a nice wall-wash effect on the wall. To be mounted on ceiling. Available in white and/or black.

design in cooperation with couvreur-devos

SUPERMODULAR.COM/EN/UNITED-ASY

ECO FLUORESCENT GI

United asy 1x 21/39W GI



1X T16 SLS G5 21/39W

Friends of hue | 230V | IP20 | GWT 960° | 3.00KG

NOT DIMMABLE	
black struc (black interior)	**11803348**
black struc (white struc interior)	**11803347**
white struc (black interior)	**11803329**
white struc (white struc interior)	**11803309**

1-10V*	
black struc (black interior)	**11803548**
black struc (white struc interior)	**11803547**
white struc (black interior)	**11803529**
white struc (white struc interior)	**11803509**

DALI/PUSHDIM	
black struc (black interior)	**11803448**
black struc (white struc interior)	**11803447**
white struc (black interior)	**11803429**
white struc (white struc interior)	**11803409**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

ECO FLUORESCENT GI

United asy 1x 28/54W GI





1X T16 SLS G5 28/54W

Friends of hue | 230V | IP20 | GWT 960° | 4.80KG

NOT DIMMABLE	
black struc (black interior)	**11803648**
black struc (white struc interior)	**11803647**
white struc (black interior)	**11803629**
white struc (white struc interior)	**11803609**

1-10V*	
black struc (black interior)	**11803848**
black struc (white struc interior)	**11803847**
white struc (black interior)	**11803829**
white struc (white struc interior)	**11803809**

DALI/PUSHDIM	
black struc (black interior)	**11803748**
black struc (white struc interior)	**11803747**
white struc (black interior)	**11803729**
white struc (white struc interior)	**11803709**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

United asy

ECO FLUORESCENT GI

United asy uncovered 1x 21/39W GI



1X T16 SLS G5 21/39W

NOT DIMMABLE	
black	**11806302**
white struc	**11806309**

1-10V*	
black	**11806502**
white struc	**11806509**

DALI/PUSHDIM	
black	**11806402**
white struc	**11806409**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

ECO FLUORESCENT GI

United asy uncovered 1x 28/54W GI



1X T16 SLS G5 28/54W

NOT DIMMABLE	
black	**11806602**
white struc	**11806609**

1-10V*	
black	**11806802**
white struc	**11806809**

DALI/PUSHDIM	
black	**11806702**
white struc	**11806709**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

UNITED ASY
NICKELSON, BREDA (NL)
WINNIE AMANN BY BELLEVILLE

U shape

Sleek spaces can be softened with rounded accents such as U shape, available in a white or black structure. For ceiling mounting, you can opt for U shape with two directional spotlights or U shape suspended, a cloud-like luminaire with a fluorescent lamp.

design in cooperation with rotorgroup

SUPERMODULAR.COM/EN/U-SHAPE

HALOGEN 12V | GI

U shape 2x MR16 GI



2X QR-CBC 51 | GX5.3 | MAX. 50W

230V | R,L,C | IP20 | GWT 960° | 2.00KG

UNIVERSALLY DIMMABLE	
black struc	**11280532**
white struc	**11280509**

INSTALLATION	
11060709	SUSPENSION KIT 4M - 3X 0.75 (2 CABLES) - WHITE STRUC
11060732	SUSPENSION KIT 4M - 3X 0.75 (2 CABLES) - BLACK STRUC

ECO | FLUORESCENT | GI

U shape suspended TL5 GI



2X T16 | G5 | 28W

230V | IP20 | GWT 960° | 4.50KG

NOT DIMMABLE	
black struc	**11280432**
white struc	**11280409**

! SUSPENSION KIT INCLUDED

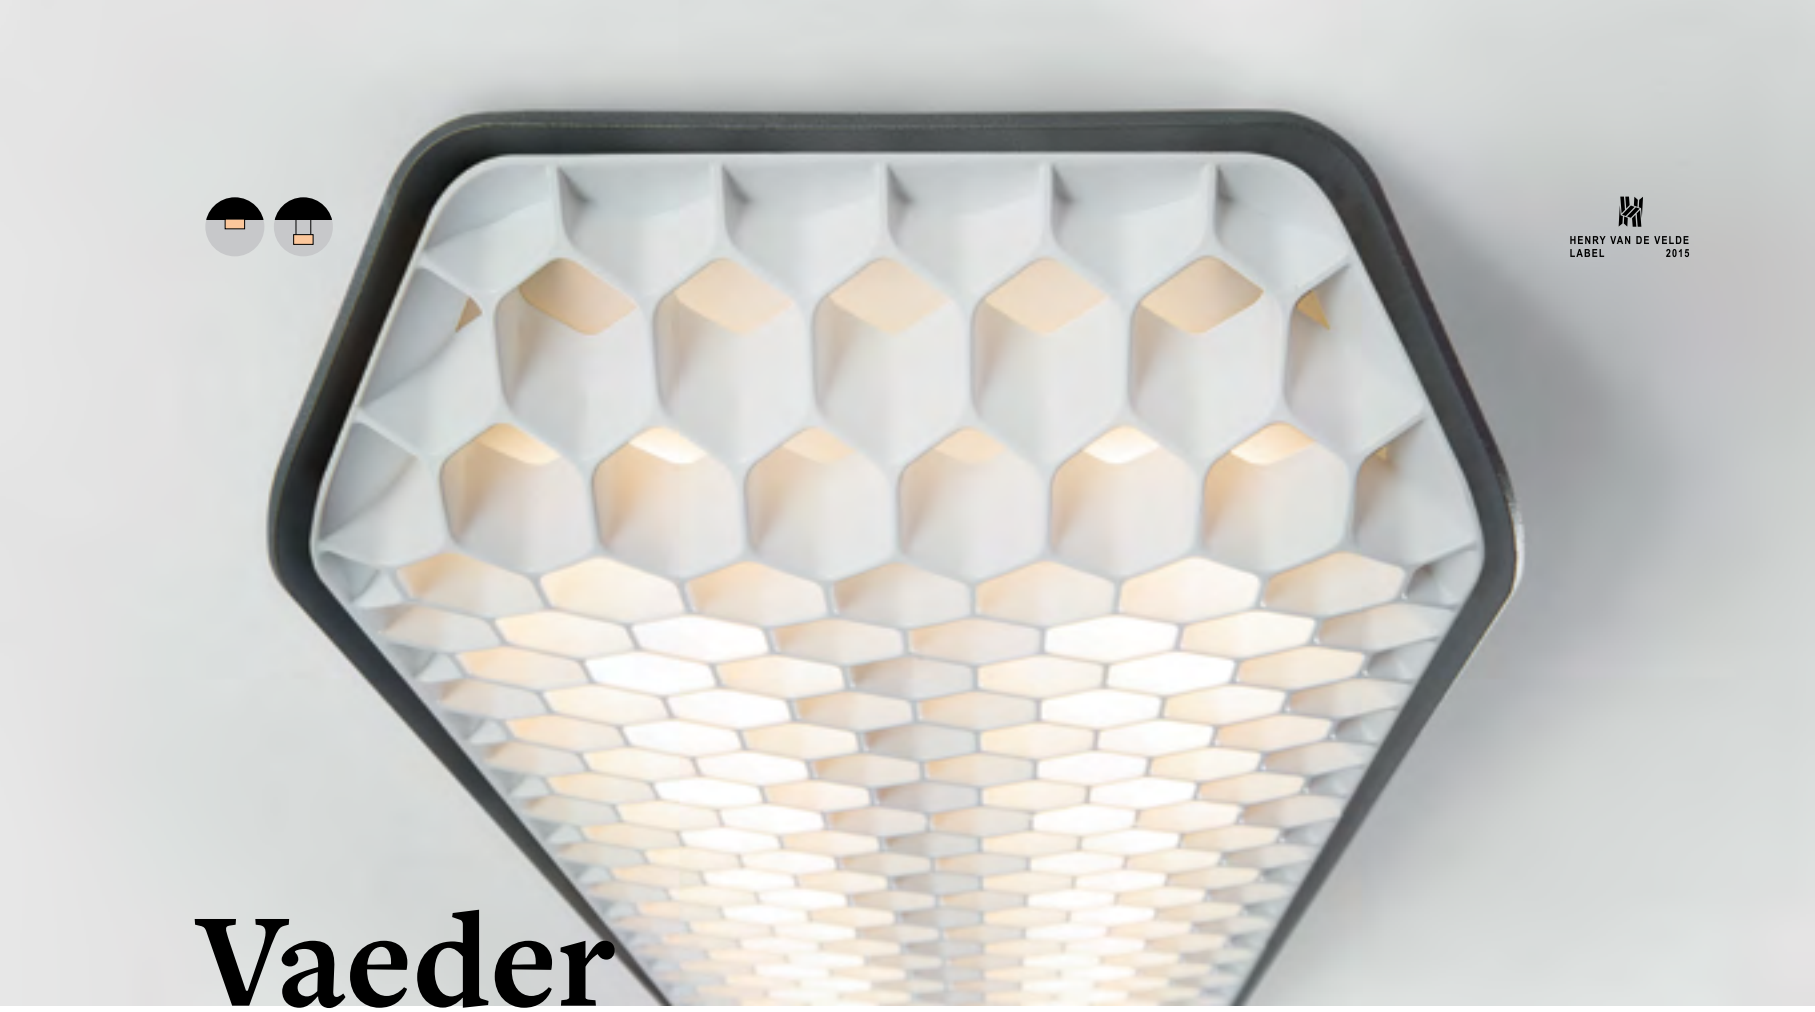

Vaeder

With a name derived from the English verb 'evade', it is clear from the start that Vaeder will be miles ahead of anything average. This fixture feels equally at home in an energy-efficient, ergonomic office environment and in a home office. Its characteristic honeycomb structure in combination with a wafer-thin diffuser minimizes glare, whilst Vaeder's ground-breaking LED technology results in an energy-efficient and high performance office fixture.

design in cooperation with gerd couckhuyt

OTHERWORLDLY

Vaeder can be supplied either surface mounted or as a pendant. For surface mounting, it is positioned a small distance from the ceiling, which gives it a lighter look, as if floating against the ceiling. In its pendant version, Vaeder's soft curves create a futuristic fixture that appears to be hovering out of another dimension. The fixture's suspension height can be modified using a new adjuster system.

A HIGHLY RECOGNIZABLE SHAPE

When designing Vaeder, our R&D team once again drew inspiration from nature. Here, the honeycomb architecture was copied, yet improved, both visually and functionally, to increase the performance of the fixture. The combs themselves are slightly more rounded and deepened than in a bees' honeycomb. The hexagonal walls have been reshaped so that they connect seamlessly to the outer shell, whilst remaining recognizable.

UGR 16

Because of its unique design consisting of one LED source and three optical components, this luminaire provides bright and glare-free light with an optimum UGR value of 16. This makes Vaeder a perfect LED alternative to office luminaires with the traditional fluorescent T5/T8 lamps. With optimal results on light distribution, visual comfort and efficacy, this luminaire fully meets the EN 12464-1 office standard.

SUPERMODULAR.COM/EN/VAEDER

ECO LED GI

Vaeder LED GI



8X LED LINE INCL. 4W

Friends of hue | 230V | IP20 | GWT 960° | 4.20KG

DALI/PUSHDIM/1-10V*	3000K / CRI90	4000K / CRI90
black struc - black	14080148	14080248
black struc - white	14080172	14080272
donkey grey struc - black	14080175	14080275
donkey grey struc - white	14080174	14080274
white struc - black	14080129	14080229
white struc - white	14080173	14080273

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - white)

3000K	**2245lm 36W**
4000K	**2245lm 36W**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

ECO LED GI

Vaeder suspension (power feed surface) LED GI



8X LED LINE INCL. 4W

Friends of hue | 230V | IP20 | GWT 960° | 4.70KG

DALI/PUSHDIM/1-10V*	3000K / CRI90	4000K / CRI90
black struc - black	14081148	14081348
black struc - white	14081172	14081372
donkey grey struc - black	14081175	14081375
donkey grey struc - white	14081174	14081374
white struc - black	14081129	14081329
white struc - white	14081173	14081373

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - white)

3000K	**2245lm 36W**
4000K	**2245lm 36W**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

Vaeder

ECO LED GI

Vaeder suspension (power feed recessed) LED GI



8X LED LINE INCL. 4W

DALI/PUSHDIM/1-10V*	3000K / CRI90	4000K / CRI90
black struc - black	**14081248**	**14081448**
black struc - white	**14081272**	**14081472**
donkey grey struc - black	**14081275**	**14081475**
donkey grey struc - white	**14081274**	**14081474**
white struc - black	**14081229**	**14081429**
white struc - white	**14081273**	**14081473**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc - white)

3000K	**2245lm 36W**
4000K	**2245lm 36W**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

VAEDER BLACK STRUCTURE / WHITE

VAEDER WHITE STRUCTURE / WHITE

VAEDER SUSPENSION DONKEY GREY STRUCTURE / BLACK
(POWER FEED SURFACE)

Vaeder

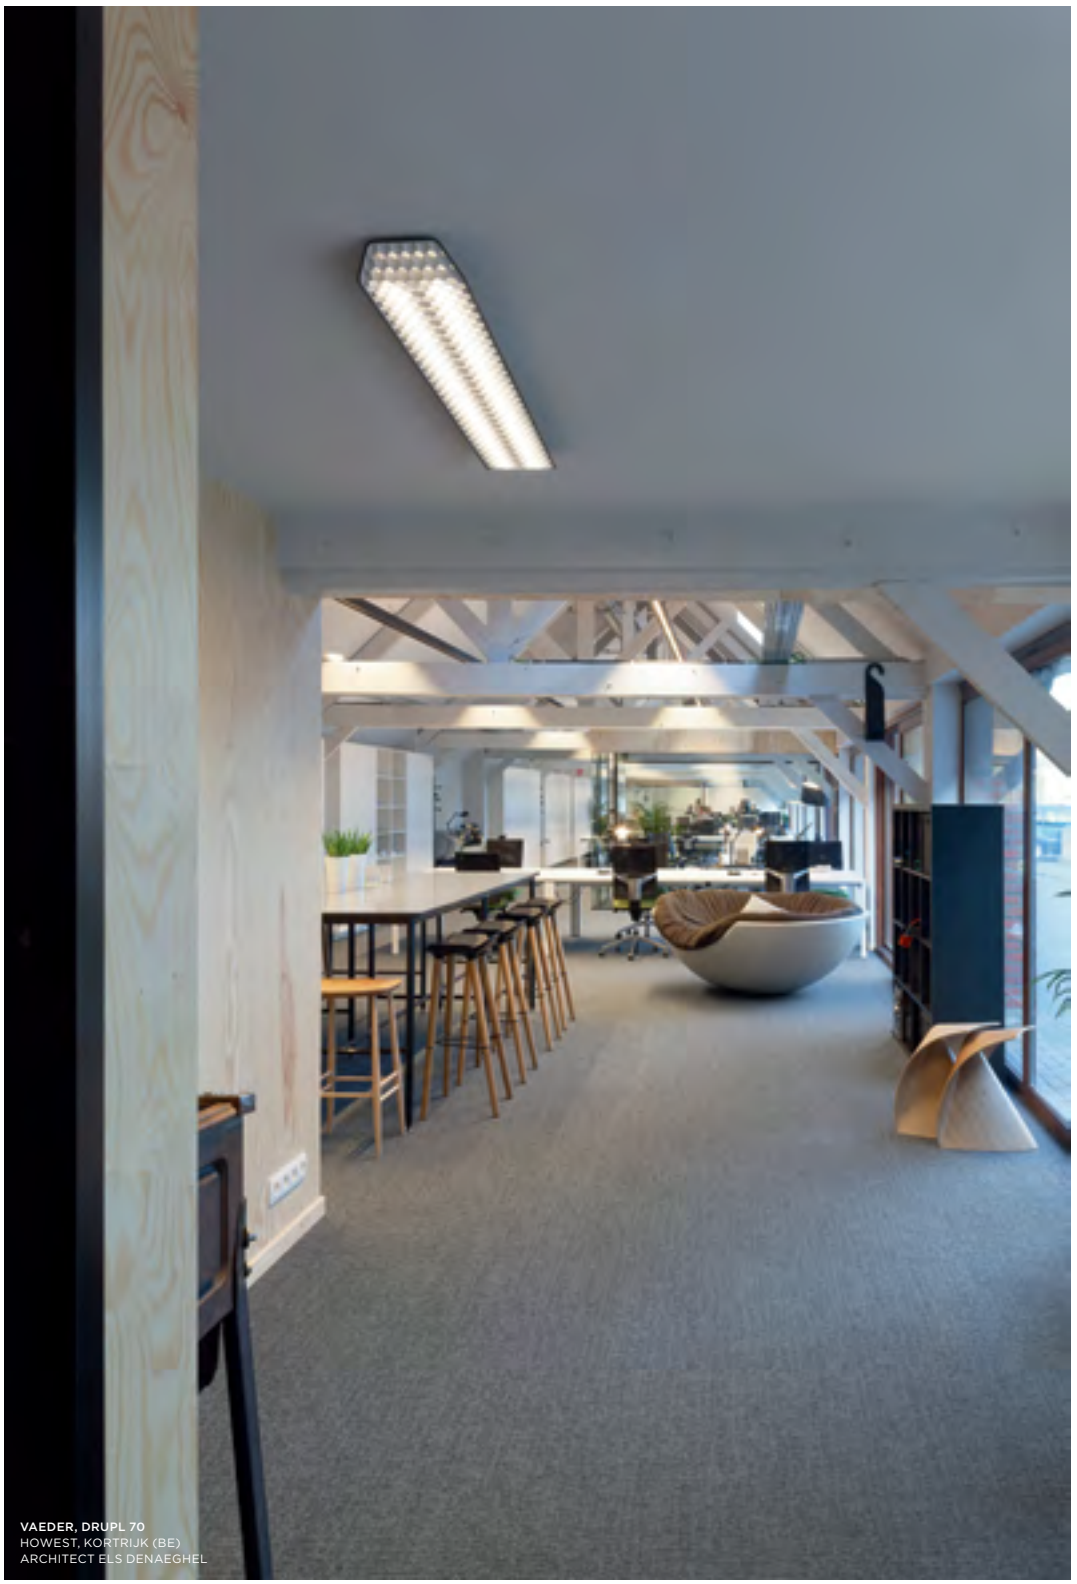

VAEDER, DRUPL 70
HOWEST, KORTRIJK (BE)
ARCHITECT ELS DENAEGHEL

VAEDER, DRUPL 70
HOWEST, KORTRIJK (BE)
ARCHITECT ELS DENAEGHEL

VAEDER
BIT, EDE (NL)
QUUB INTERIOR CONCEPTS

Vaeder

VAEDER
HET NIEUWE INSTITUUT, ROTTERDAM (NL)

VAEDER
HAVN, ANTWERPEN (BE)
.MAX INTERIEURARCHITECTEN

Wink

Wink may be recessed, and therefore discreet, but its technical ingenuity is nothing short of remarkable, so is its sense of humour. As its name suggests, it likes to wink at you. The streamlined design, where elegance meets high-quality finish, results in a fixture that is half hidden in the ceiling and half peeking out. It has all the features to become a new Modular icon.

design in cooperation with couvreur-devos

FEMININE CURVES

Our new spotlight enlivens your interior. Its ambiguous design makes Wink stand out, even though it's hiding in the ceiling. The feminine curves have both sharp and soft lines. In turn, Wink shows the many facets of its playful appearance depending on your point of view. In essence Wink is like no other spotlight!

REFINED FINISHING

Wink generates a symmetrical downwards facing beam of light. Asy wink, however, emits light asymmetrically. While both look the same, they create a completely different light effect. The asymmetrical light allows you to really emphasise objects on the wall.

UNIQUE LIGHT EFFECT

With its symmetric or asymmetric lighting experience, Wink is perfect for any residential or hospitality project. Its identical design allows you to combine both versions, in order to create different lighting effects in the same room. This makes it a very versatile lighting solution. Wink comes in black or white structure finishing, different beam angles and different colour temperatures in order to meet the needs of all markets.

SUPERMODULAR.COM/EN/WINK

ECO LED GE

Wink asy 115 LED GE



1X LED ARRAY INCL. 16.2W

! 3500K AND 4000K ON REQUEST
! RECESSED RING INCLUDED

	2700K / CRI90+			3000K / CRI90+		
	15°	25°	40°	15°	25°	40°
black struc	13071032	13071332	13071632	13071132	13071432	13071732
white struc	13071009	13071309	13071609	13071109	13071409	13071709

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° white struc)

	350mA	**500mA**	700mA	900mA
2700K / 25°	776lm 11W	**1023lm 16W**	1283lm 23W	1469lm 31W
3000K / 25°	893lm 11W	**1177lm 16W**	1477lm 23W	1692lm 31W

DRIVER	SEE DRIVER MATRIX

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
13073009	WINK FLANGE WHITE STRUC
13073032	WINK FLANGE BLACK STRUC

ECO LED GE

Wink asy 115 LED spreadlight GE





1X LED ARRAY INCL. 16.2W

! 3500K AND 4000K ON REQUEST
! RECESSED RING INCLUDED

	2700K / CRI90+	3000K / CRI90+
black struc	13071932	13072032
white struc	13071909	13072009

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

	350mA	**500mA**	700mA	900mA
2700K/	805lm 11W	**1061lm 16W**	1331lm 23W	1525lm 31W
3000K/	791lm 11W	**1042lm 16W**	1307lm 23W	1498lm 31W

DRIVER	SEE DRIVER MATRIX

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
13073009	WINK FLANGE WHITE STRUC
13073032	WINK FLANGE BLACK STRUC

Wink

ECO LED GE

Wink 115 LED GE



1X LED ARRAY INCL. 16.2W

! 3500K AND 4000K ON REQUEST
! RECESSED RING INCLUDED

Friends of hue | III | 500mA | IP54 | GWT 960° | 0.86KG

	2700K / CRI90+			3000K / CRI90+		
	15°	25°	40°	15°	25°	40°
black struc	**13070032**	**13070332**	**13070632**	**13070132**	**13070432**	**13070732**
white struc	**13070009**	**13070309**	**13070609**	**13070109**	**13070409**	**13070709**

LUMINAIRE OUTPUT & POWER CONSUMPTION

(25° white struc)

	350mA	**500mA**	700mA	900mA
2700K / 25°	833lm 11W	**1142lm 16W**	1520lm 23W	1791lm 31W
3000K / 25°	952lm 11W	**1306lm 16W**	1738lm 23W	2049lm 31W

DRIVER	SEE DRIVER MATRIX

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
13073009	WINK FLANGE WHITE STRUC
13073032	WINK FLANGE BLACK STRUC

Wink

WINK

ASY WINK SPREADLIGHT

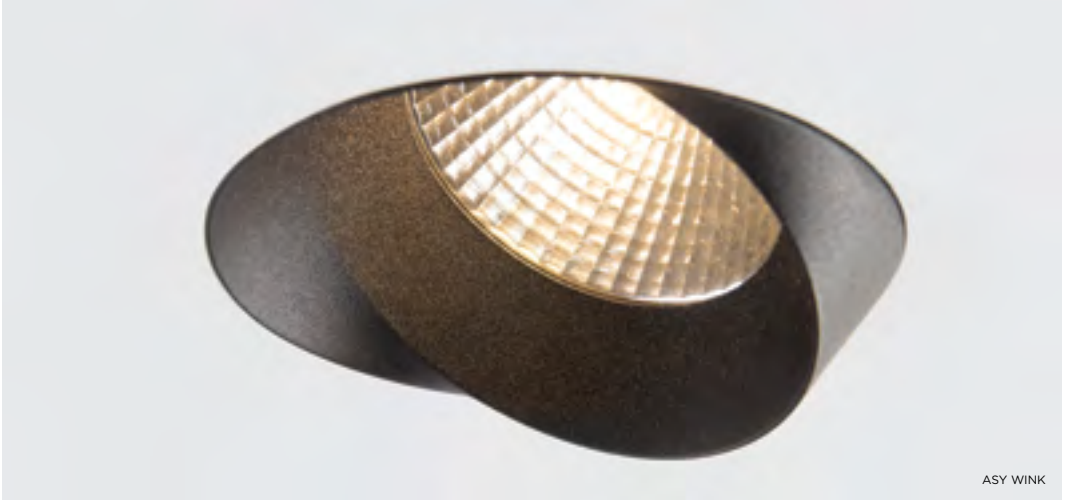

ASY WINK

Wink

WINK
OPTIFQ, MENEN (BE)
FIVE AM

WINK, ASY WINK
SVILLA B&B, TURNHOUT (BE)

Wink

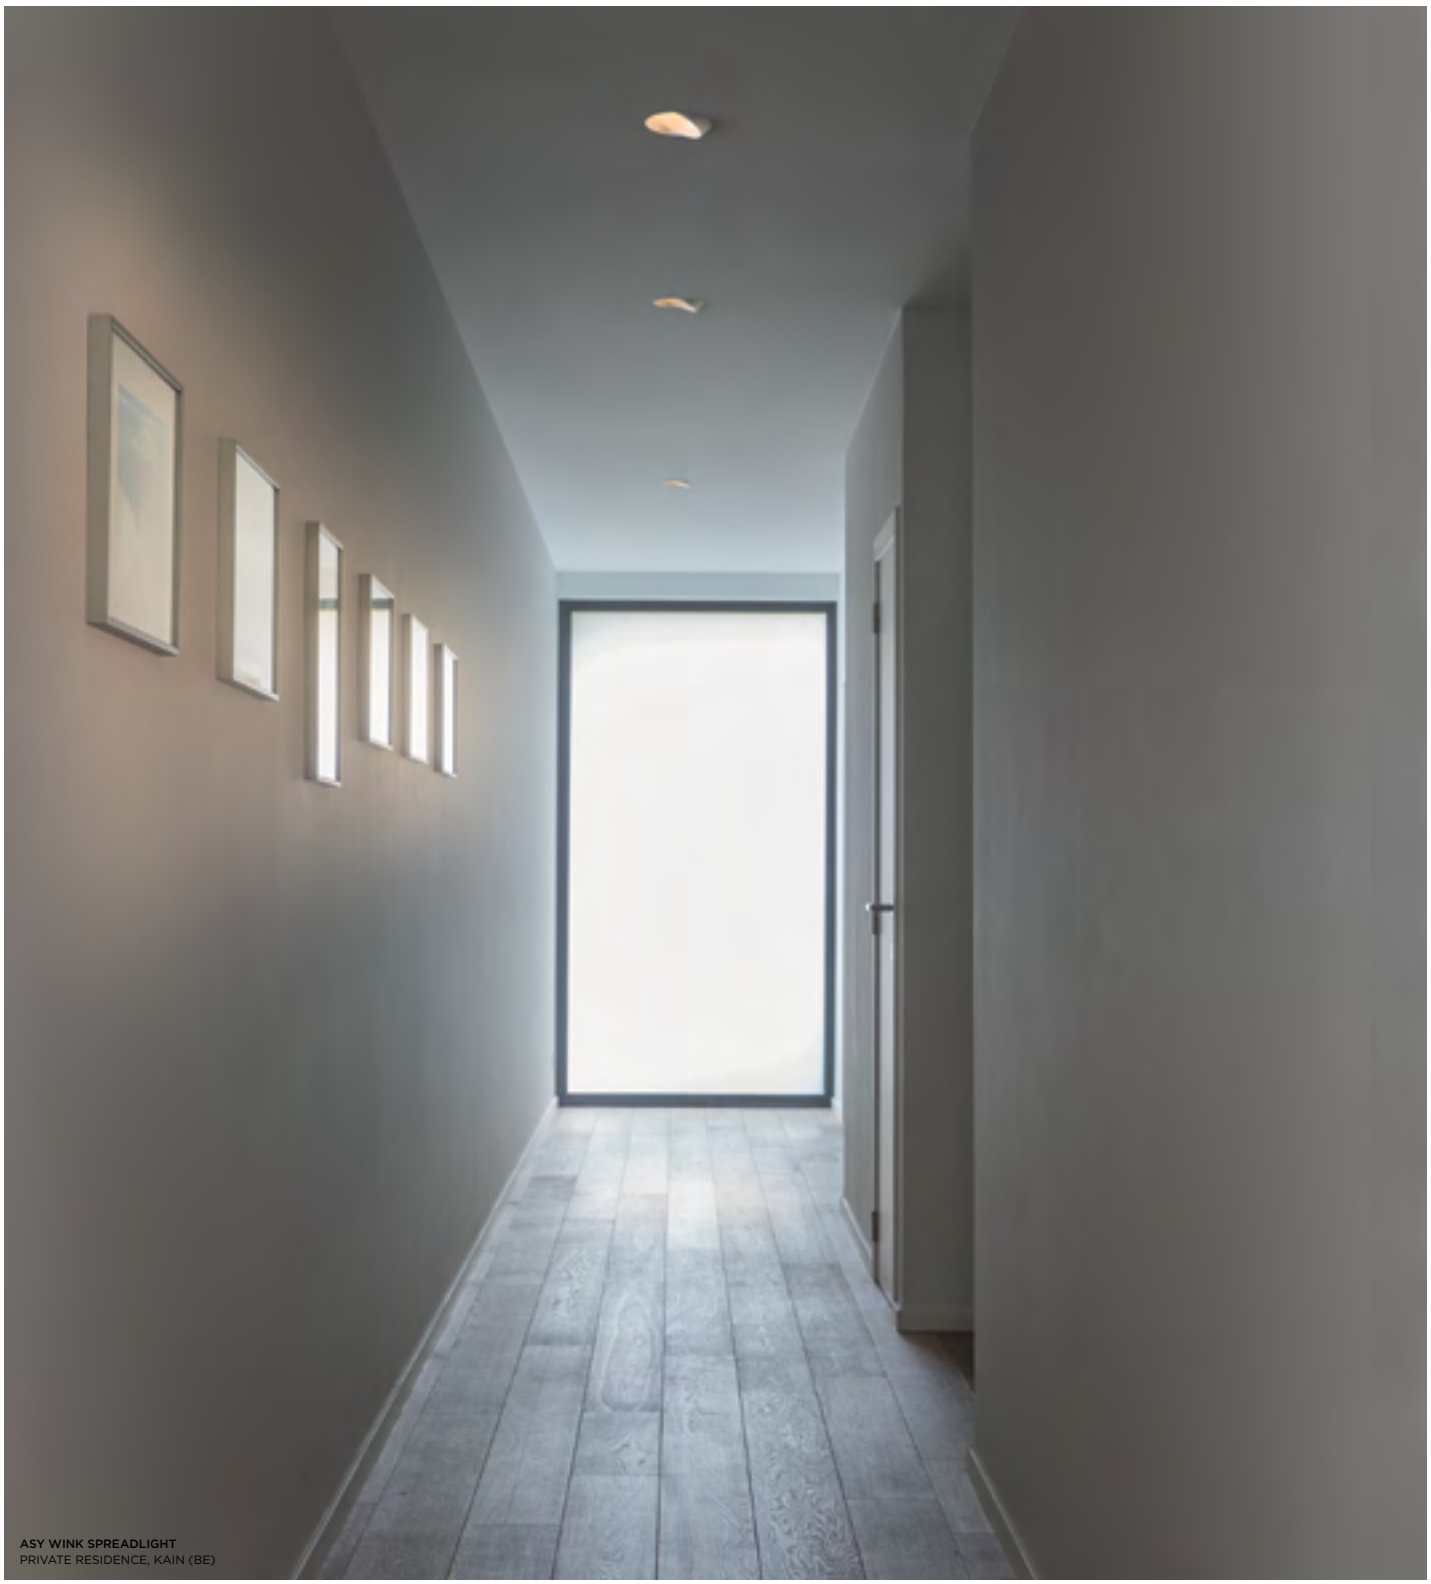

ASY WINK SPREADLIGHT
PRIVATE RESIDENCE, KAIN (BE)

ASY WINK
PRIVATE RESIDENCE, KAIN (BE)

Wink

WINK
PRIVATE RESIDENCE, DEN HAAG (NL)
KT71

WINK
HAVN, ANTWERPEN (BE)
.MAX INTERIEURARCHITECTEN

2Flat2C

With a height of just 34.5 mm, 2Flat2C really lives up to its name. Nonetheless, this suspended, sleek luminaire is extremely versatile: the design allows you to combine functional and accent lighting.

SUPERMODULAR.COM/EN/2FLAT2C

ECO FLUORESCENT GI

2FLAT2C suspended TL5 poly up/down GI



230V | GWT 960° | 8.21KG

alu	**93160320**
white struc	**93160322**

2X T16 | G5 | 28/54W

! INCL. POWER FEED KIT 2M (TRANSPARANT CABLE) & SUSPENSION SET

FLUORESCENT GI

2FLAT2C susp. TL5 poly up/down / AR111 down GI



230V | GWT 960° | 12.42KG

alu	**93162220**
white struc	**93162222**

2X T16 | G5 | 28/54W
2X QR-LP 111 | G53 | 50W

! INCL. POWER FEED KIT 2M (TRANSPARANT CABLE) & SUSPENSION SET

ECO FLUORESCENT GI

2FLAT2C suspended TL5 bap up/down GI



230V | GWT 960° | 8.21KG

alu	**93160120**
white struc	**93160122**

1X T16 | G5 | 28/54W

! INCL. POWER FEED KIT 2M (TRANSPARANT CABLE) & SUSPENSION SET

Wall

388 *Doze*
392 *Duell*
402 *Flat moon*
406 *Fuser*
410 *Lotis tubed*
416 *Marty*
418 *Nomad linestra*
420 *Nomad minimal*
424 *Nude*
418 *Nukav*
432 *Split*
438 *Spock*
442 *Sulfer*
448 *Trapz*
452 *Wollet*

Wall

Doze
389

Duell
393

Flat moon
403

Fuser
407

Lotis tubed
411

Marty
417

Nomad linestra
419



Nomad minimal
421

Nude
425



Nukav
429



Split
433

Spock
439



Sulfer
443



Trapz
449

Wollet
453

see also:

p. 40

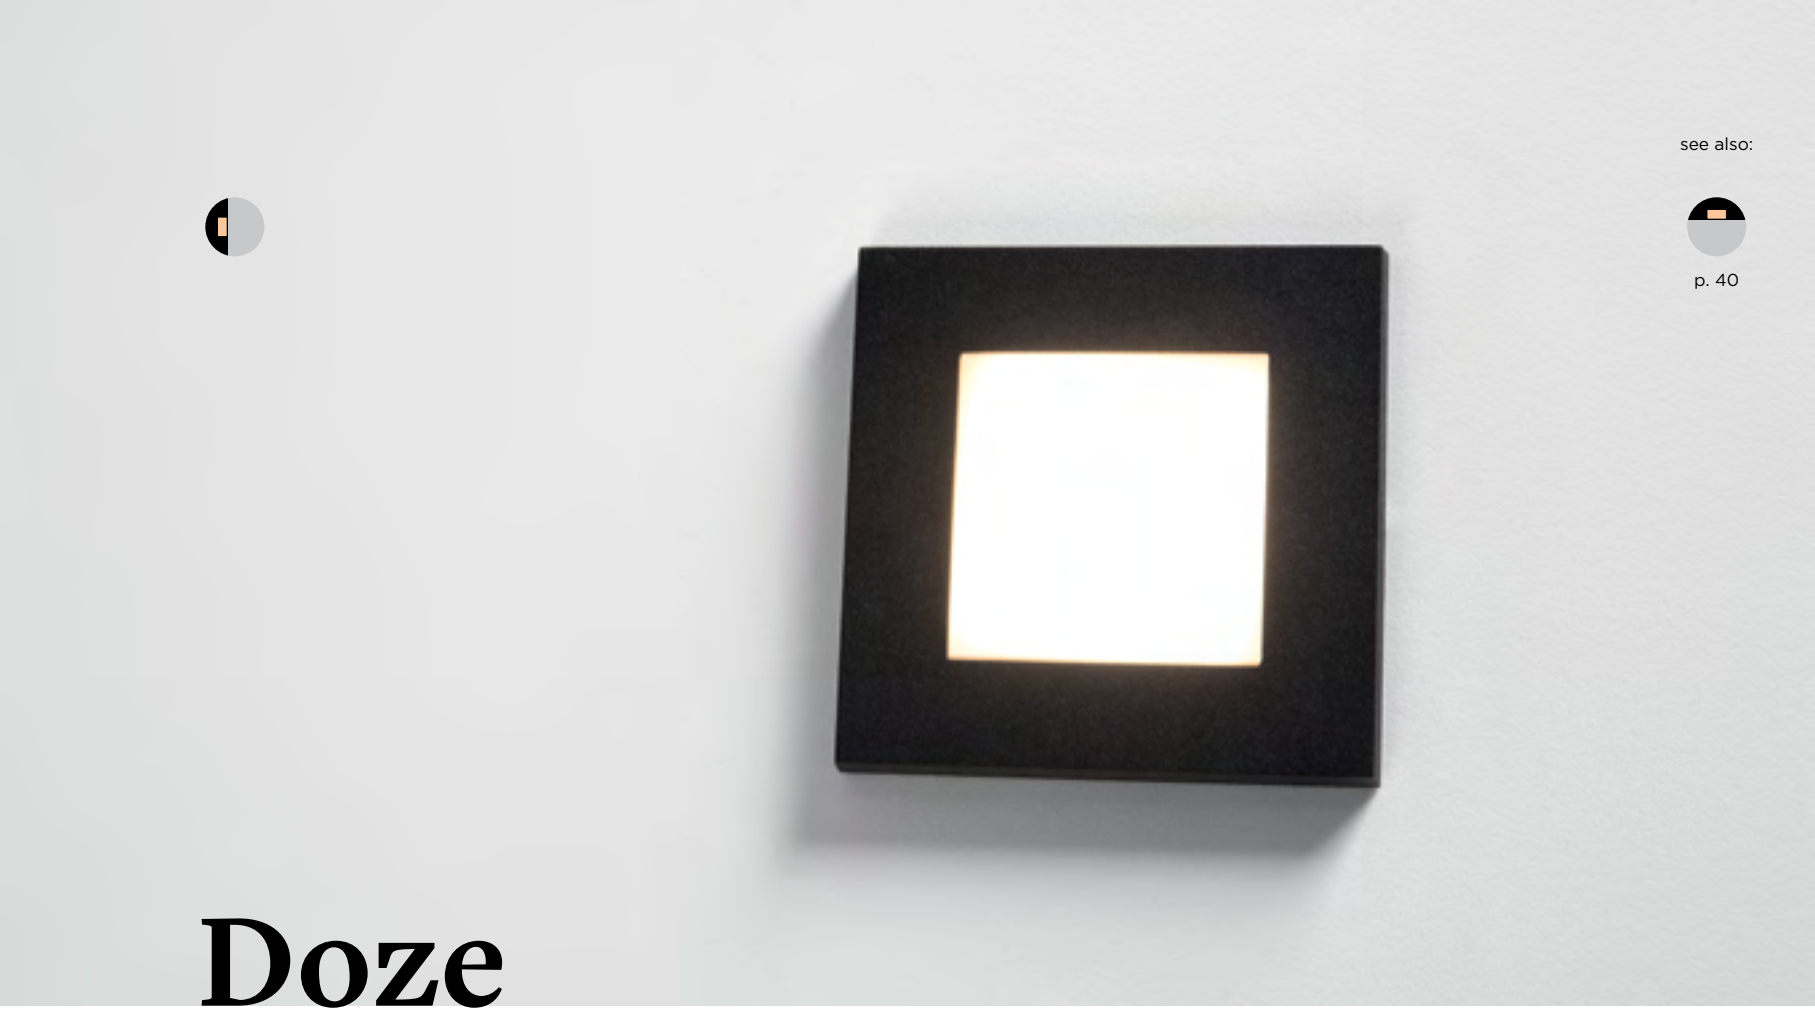

Doze

Doze, what's in a name? A box of light. Doze is available in a round or square version and has a stout rim in white or black with a polycarbonate diffuser. The nice thing is that Doze fits perfectly into a standard electrical junction box (supplied with the luminaire), which is found in every (new) building. A performant alternative for a standard recessed spot. Perfect for illuminating a hallway or staircase.

SUPERMODULAR.COM/EN/DOZE

ECO LED

Doze 80 wall LED



1X HIGH POWER LED INCL. 4.5W

! JUNCTION BOX Ø68 INCLUDED

230V | R,C | IP20 | GWT 850° | 0.14KG

TRAILING EDGE DIMMABLE	2600K / CRI80
black struc	12330032
white struc	12330009

INSTALLATION

12339930	CONBOX Ø130 H135

ECO LED

Doze square wall LED



1X HIGH POWER LED INCL. 4.5W

! JUNCTION BOX Ø68 INCLUDED

230V | R,C | IP20 | GWT 850° | 0.14KG

TRAILING EDGE DIMMABLE	2600K / CRI80
black struc	12330132
white struc	12330109

INSTALLATION

12339930	CONBOX Ø130 H135

Doze

DOZE
PRIVATE RESIDENCE, EULMONT (FR)
MYSPACE PLANNER

DOZE

see also:

p. 42

p. 42

p. 468

Duell

With its gentle curves, Duell gives every room a softer touch. As a wall luminaire, Duell creates a wide fan of light on the wall, both upwards and downwards. The double-walled housing allows you to play with color, bringing a more authentic feel into the room.

SUPERMODULAR.COM/EN/DUELL

ECO LED GI

Duell wall IP44 LED GI





2X HIGH POWER LED INCL. | 2W

230V | IP44 | GWT 960° | 0.85KG

	3000K / CRI90	4000K / CRI90
black struc (gold interior)	**11071132**	**11071232**
white struc (champagne interior)	**11071109**	**11071209**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc (champagne interior))

3000K	**148lm 2W**
4000K	**164lm 2W**

ECO LED

Duell wall LED 500lm



2X LED ARRAY 230V INCL. | 4.5W

230V | R,C | IP20 | GWT 960° | 1.10KG

TRAILING EDGE DIMMABLE	2700K / CRI80
black struc (gold interior)	**11074732**
cacao bronze (black interior)	**11074768**
metallic blue (alu interior)	**11074769**
silky grey (champagne interior)	**11074759**
white struc (champagne interior)	**11074709**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc (champagne interior))

2700K	**574lm 9W**

ECO LED GI

Duell wall LED 900lm GI





2X LED ARRAY INCL. | 6.2W

Friends of hue | 230V | IP20 | GWT 960° | 1.20KG

NOT DIMMABLE	2700K / CRI90+
black struc (gold interior)	**11074532**
cacao bronze (black interior)	**11074568**
metallic blue (alu interior)	**11074569**
silky grey (champagne interior)	**11074559**
white struc (champagne interior)	**11074509**

1-10V*/PUSHDIM	2700K / CRI90+
black struc (gold interior)	**11074632**
cacao bronze (black interior)	**11074668**
metallic blue (alu interior)	**11074669**
silky grey (champagne interior)	**11074659**
white struc (champagne interior)	**11074609**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc (champagne interior))

2700K	**775lm 14W**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

Duell

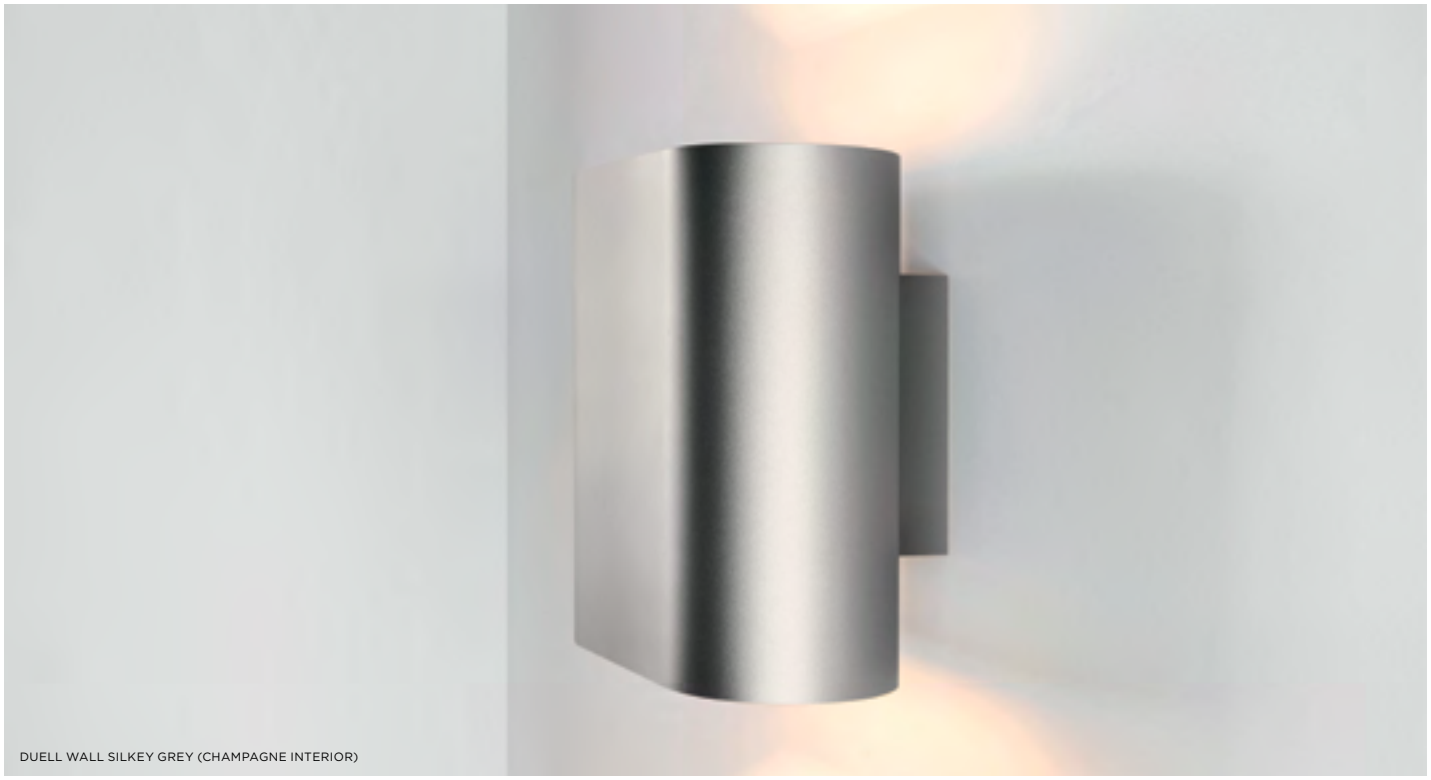

DUELL WALL SILKEY GREY (CHAMPAGNE INTERIOR)

DUELL WALL METALLIC BLUE (ALU INTERIOR)

HALOGEN 230V

Duell wall 1x R7s





1X QT-DE | R7S | MAX. 150W

230V | R | IP20 | GWT 960° | 0.85KG

RESISTIVE DIMMABLE	
black struc (gold interior)	**11070632**
white struc (champagne interior)	**11070609**

Duell

DUELL
PRIVATE RESIDENCE, EERSEL (NL)
SENNAH STUDIO

DUELL
PRIVATE RESIDENCE, ROTTERDAM (NL)
LINDA LAGRAND INTERIOR DESIGN

Duell

DUELL
BIT, EDE (NL)
QUUB INTERIOR CONCEPTS

DUELL, SMART LOTIS WITH SMART SURFACE BOX
PRIVATE RESIDENCE, ROTTERDAM (NL)
LINDA LAGRAND INTERIOR DESIGN

Duell

DUELL
PRIVATE RESIDENCE, ROTTERDAM (NL)
MOERVAST

DUELL
PRIVATE RESIDENCE (SEYCHELLES)

see also:

p. 52

p. 52

Flat moon

Just as Flat moon does on the ceiling, Flat moon wall lends atmosphere to your wall. The lamp has a diameter of 480mm and is available with a with or black structure finishing. You can choose between a direct and direct/indirect version. The latter makes it possible to leave some space between the fixture and the wall, for an indirect atmospheric effect.

SUPERMODULAR.COM/EN/FLAT-MOON

ECO COMPACT FLUORESCENT GI

Flat moon 480 wall TL5 GI



4X TC-L 2G11 18W

230V IP20 GWT 650° 4.00KG

NOT DIMMABLE	
black struc	12680632
white struc	12680609

1-10V*	
black struc	12685632
white struc	12685609

DALI/PUSHDIM	
black struc	12686632
white struc	12686609

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

ECO COMPACT FLUORESCENT GI

Flat moon 480 wall backlit TL5 GI



4X TC-L 2G11 18W

230V IP20 GWT 650° 3.40KG

NOT DIMMABLE	
black struc	12680732
white struc	12680709

1-10V*	
black struc	12685732
white struc	12685709

DALI/PUSHDIM	
black struc	12686732
white struc	12686709

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

Flat moon

FLAT MOON
PROJECTATELIER, KASTERLEE (BE)

FLAT MOON
AZ ST-JAN CAMPUS H. SERRUYS, OOSTENDE (BE)
MV2 ARCHITECTEN

see also:
p. 474

Fuser

This impressive luminaire will both attract your attention and highlight the outdoor. Fuser is at best wall mounted to safeguard your entrance or your outdoor spaces. Its industrial look blends in perfectly with all kinds of architecture. Fuser contains fluorescent lamps and a diffuser to soften the light.

SUPERMODULAR.COM/EN/FUSER

ECO FLUORESCENT

Fuser single IP54 2x 21W GI

230V | IP54 | GWT 960° | 5.49KG





2X T16 G5 21W

dark grey	11100811

ECO FLUORESCENT

Fuser double IP54 4x 21W GI

230V | IP54 | GWT 960° | 10.80KG





4X T16 G5 21W

dark grey	11100911

Fuser

FUSER
PAVILON, PRAGUE (CZECH REPUBLIC)
MIMOLIMIT

FUSER
PALAIS DE TOKYO, PARIS (FR)

see also:

p. 128

p. 128

p. 506

Lotis tubed

Lotis tubed is the surface mounted version of the standard Lotis recessed spot. The coloured cylinder accommodates the Lotis spot. Lotis tubed is available in different heights - from 130 mm to 190 mm. The largest size also comes in a suspension version. Combining both versions creates depth in your rooms and spices your interior. Lotis tubed allows you to play with colour: go for a contrast between black, white and gold or choose a more uniform look instead.

SUPERMODULAR.COM/EN/LOTIS-TUBED

ECO LED

Lotis tubed wall 1x LED retrofit





1X LED GU10 INCL. | GU10 | 5.4W

230V | R,L | IP20 | GWT 960° | 0.90KG

LEADING EDGE DIMMABLE	2700K / CRI90
	25°
black struc (gold interior)	**11458832**
black struc (white struc interior)	**11458837**
white struc (black interior)	**11458829**
white struc (gold interior)	**11458889**
white struc (white struc interior)	**11458809**

HALOGEN 230V

Lotis tubed wall 1x GU10





1X QPAR 16 | GU10 | MAX. 35W

Friends of hue | 230V | * R | IP20 | GWT 960° | 0.80KG

black struc (gold interior)	**10883832**
black struc (white struc interior)	**10883837**
white struc (black interior)	**10883829**
white struc (gold interior)	**10883889**
white struc (white struc interior)	**10883809**

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED	
70000613	PHILIPS HUE RGB GU10 BULB 6.5W
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

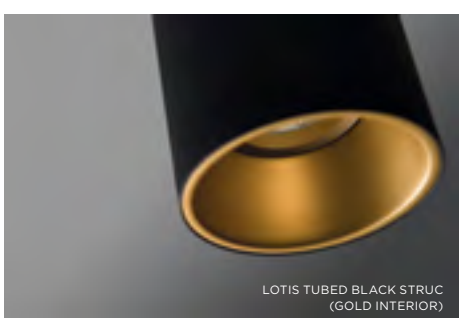
LOTIS TUBED BLACK STRUC (GOLD INTERIOR)

LOTIS TUBED BLACK STRUC (WHITE STRUC INTERIOR)

LOTIS TUBED WHITE STRUC (WHITE STRUC INTERIOR)

Lotis tubed

ECO LED

Lotis tubed wall 2x LED retrofit



2X LED GU10 INCL. | GU10 | 5.4W

230V | R,L | IP20 | GWT 960° | 1.30KG

LEADING EDGE DIMMABLE	2700K / CRI90
	25°
black struc (gold interior)	**11458932**
black struc (white struc interior)	**11458937**
white struc (black interior)	**11458929**
white struc (gold interior)	**11458989**
white struc (white struc interior)	**11458909**

HALOGEN 230V

Lotis tubed wall 2x GU10



2X QPAR 16 | GU10 | MAX. 35W

Friends of hue | 230V | * R | IP20 | GWT 960° | 1.10KG

black struc (gold interior)	**10883732**
black struc (white struc interior)	**10883737**
white struc (black interior)	**10883729**
white struc (gold interior)	**10883789**
white struc (white struc interior)	**10883709**

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED	
70000613	PHILIPS HUE RGB GU10 BULB 6.5W
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

LOTIS TUBED
IPI KULMAKUPPILA, HELSINKI (FI)
PETRA MAJANTIE OY

Lotis tubed

LOTIS TUBED
PRIVATE RESIDENCE, ROTTERDAM (NL)
DOEN

LOTIS TUBED
CLUBHOUSE, TILBURG (NL)
ZOUT ONTWERPHUIS, JEFF VAN RIEL

Marty

Simple concepts are often the best. Marty is a modern version of the classic light bulb, but it is more convenient and more economical. The LED fitting has a click-and-turn system which makes it extremely easy to install. Used as orientation lighting, Marty will guide you safely upstairs or downstairs in the dark; installed next to a mirror it will create a modern glamour effect. Used in a cluster, Marty also offers many different decorative options. The ideal tool for creative minds.

SUPERMODULAR.COM/EN/MARTY

ECO LED GE

Marty LED GE



1X HIGH POWER LED INCL. 1W

Friends of hue | III | 350mA | IP20 | GWT 960° | 0.08KG

	3000K / CRI90+	4000K / CRI90+
opal	**11380111**	**11380211**

DRIVER	SEE DRIVER MATRIX

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

MARTY
SHOWROOM JSB, SYDNEY (AU)

Nomad linestra

Nomad linestra has become yet another classic. The symmetrical fitting with its visible wiring and bare strip light reduces lighting to its essence. It is ideal for use above a mirror, where the diffuse light will showcase you at your best.

SUPERMODULAR.COM/EN/NOMAD-LINESTRA

LED RETROFIT

Nomad linestra short S14d





FOR LED RETROFIT | MAX. 40W

230V | IP20 | GWT 960° | 0.50KG

alu	**10203105**
white struc	**10203109**

NOMAD LINESTRA
PRIVATE RESIDENCE, ROTTERDAM (NL)
MOERVAST

see also:

p. 216

Nomad minimal

Our classic Nomad is an example of lighting at its most refined and versatile. If you wish to make the industrial look a little more homely, simply choose Nomad minimal and enhance the luminaire with a shade. Available in two sizes, four colours and with three animal prints.

SUPERMODULAR.COM/EN/NOMAD-MINIMAL

HALOGEN

Nomad minimal ultra short E27





1X A 60 | E27 | MAX. 70W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN E27 LAMP

! NOMAD MINIMAL/ANIMAL SHADE OPTIONAL
! SHADE ONLY POSSIBLE WHEN MOUNTED ON CEILING
! DISK OPTIONAL

230V | R | IP20 | GWT 960° | 0.35KG

alu	10203405

CONNECTED	
70000611	PHILIPS HUE WARM WHITE E27 BULB 9.5W
70000620	PHILIPS HUE TUNABLE WHITE E27 BULB 9.5W
70000612	PHILIPS HUE RGBW E27 BULB 9W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

ACCESSORIES	
10203801	MINIMAL SHADE - MEDIUM (Ø200) - WHITE
10203802	MINIMAL SHADE - MEDIUM (Ø200) - BLACK
10203813	MINIMAL SHADE - MEDIUM (Ø200) - RED
10203901	MINIMAL SHADE - LARGE (Ø250) - WHITE
10203902	MINIMAL SHADE - LARGE (Ø250) - BLACK
10203913	MINIMAL SHADE - LARGE (Ø250) - RED
10203920	ANIMAL SHADE - LARGE (Ø250) - SNAKE BLACK/GOLD
10203921	ANIMAL SHADE - LARGE (Ø250) - SNAKE BROWN/GOLD
10203924	ANIMAL SHADE - LARGE (Ø250) - ZEBRA/WHITE

HALOGEN

Nomad minimal short E27



1X A 60 | E27 | MAX. 70W

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN E27 LAMP

! NOMAD MINIMAL/ANIMAL SHADE OPTIONAL
! DISK OPTIONAL

230V | R | IP20 | GWT 960° | 0.53KG

alu	10203305

CONNECTED	
70000611	PHILIPS HUE WARM WHITE E27 BULB 9.5W
70000620	PHILIPS HUE TUNABLE WHITE E27 BULB 9.5W
70000612	PHILIPS HUE RGBW E27 BULB 9W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

ACCESSORIES	
10203801	MINIMAL SHADE - MEDIUM (Ø200) - WHITE
10203802	MINIMAL SHADE - MEDIUM (Ø200) - BLACK
10203813	MINIMAL SHADE - MEDIUM (Ø200) - RED
10203901	MINIMAL SHADE - LARGE (Ø250) - WHITE
10203902	MINIMAL SHADE - LARGE (Ø250) - BLACK
10203913	MINIMAL SHADE - LARGE (Ø250) - RED
10203920	ANIMAL SHADE - LARGE (Ø250) - SNAKE BLACK/GOLD
10203921	ANIMAL SHADE - LARGE (Ø250) - SNAKE BROWN/GOLD
10203924	ANIMAL SHADE - LARGE (Ø250) - ZEBRA/WHITE

SHADE WHITE

SHADE BLACK

SHADE RED

SHADE BLACK / GOLD

ANIMAL SHADE
SNAKE BLACK / GOLD

ANIMAL SHADE
SNAKE BROWN / GOLD

ANIMAL SHADE ZEBRA

NOMAD MINIMAL

NOMAD MINIMAL
PHILIPS, HAMBURG (DE)
SBP DESIGN – KIM MARC BOBSIN

see also:

p. 514

Nude

Nude's pure geometrical lines are ideal to highlight architecture features. Nude is stripped down to the essence of a fixture, with the light source recessed in the slender cylinder so much so that it is practically invisible. The wall-mounted version is available as downlighter or both an up- and downlighter.

design in cooperation with joël claisse

SUPERMODULAR.COM/EN/NUDE

ECO LED

Nude wall 1x LED retrofit



230V | R,L | IP20 | GWT 960° | 0.66KG

LEADING EDGE DIMMABLE	2700K / CRI80
	25°
brushed alu	**10922124**
white struc	**10922109**

1X LED PAR20 INCL. | 5.5W

HALOGEN 230V

Nude wall 1x PAR20





230V | R | IP20 | GWT 960° | 0.35KG

RESISTIVE DIMMABLE	
brushed alu	**10920724**
white struc	**10920709**

1X QPAR 20 | E27 | MAX. 50W

HALOGEN 230V

Nude wall 1x PAR30



230V | R | IP20 | GWT 960° | 0.50KG

RESISTIVE DIMMABLE	
brushed alu	**10921024**
white struc	**10921009**

1X QPAR 30 | E27 | MAX. 75W

Nude

ECO LED

Nude wall 2x LED retrofit



2X LED PAR20 INCL. | 5.5W

230V | R,L | IP20 | GWT 960° | 1.10KG

LEADING EDGE DIMMABLE	2700K / CRI80
	25°
brushed alu	**10922224**
white struc	**10922209**

HALOGEN 230V

Nude wall 2x PAR20



2X QPAR 20 | E27 | MAX. 50W

230V | R | IP20 | GWT 960° | 0.50KG

RESISTIVE DIMMABLE	
brushed alu	**10920824**
white struc	**10920809**

HALOGEN 230V

Nude wall 2x PAR30



2X QPAR 30 | E27 | MAX. 75W

230V | R | IP20 | GWT 960° | 0.70KG

RESISTIVE DIMMABLE	
brushed alu	**10921124**
white struc	**10921109**

NUDE
PRIVATE RESIDENCE, AMSTERDAM (NL)

Nukav

Nukav, which means 'edgy', is an orientation lighting fixture. In the literal sense, edgy is also the characteristic feature of this sleek square which is missing a corner. The light is recessed a little deeper in the corner, making the oblique polycarbonate panel illuminate. The fixture can be positioned in any direction for a playful effect.

design in cooperation with couvreur-devos

SUPERMODULAR.COM/EN/NUKAV

ECO LED

Nukav LED

230V | R,C | IP20 | GWT 650° | 0.20KG



1X HIGH POWER LED 230V INCL. | 4.5W

TRAILING EDGE DIMMABLE	2700K / CRI80
black struc	**12300032**
white struc	**12300009**

Nukav

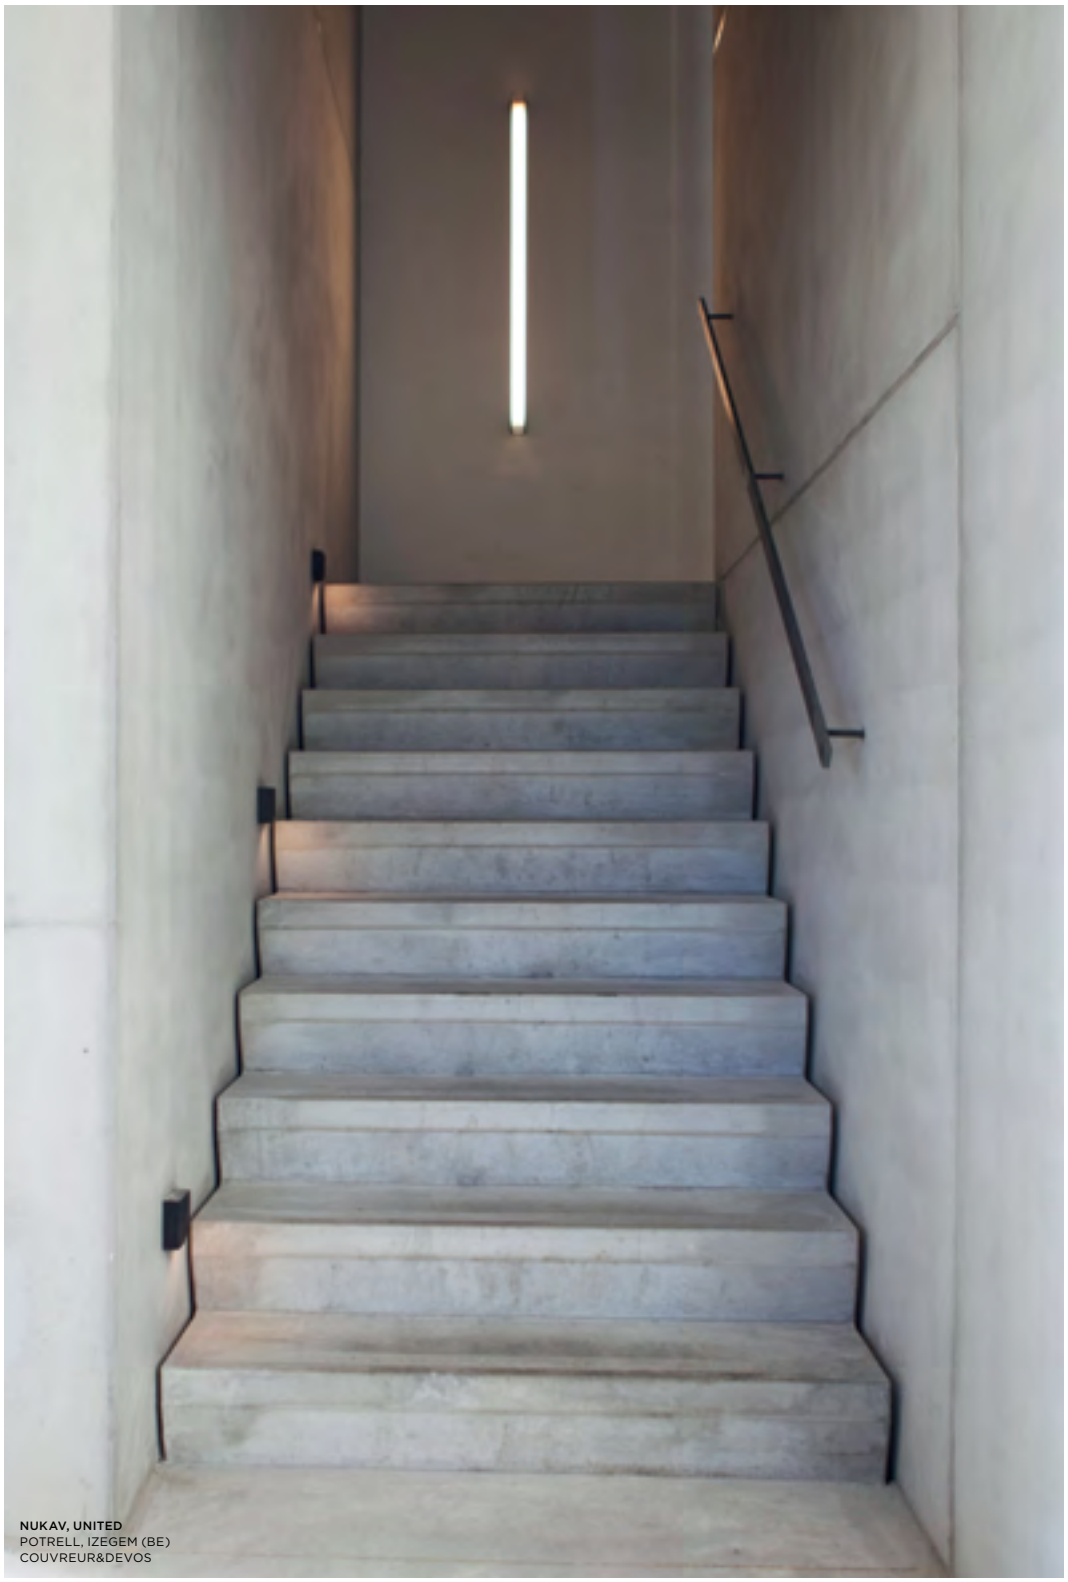

NUKAV, UNITED
POTRELL, IZEGEM (BE)
COUVREUR&DEVOS

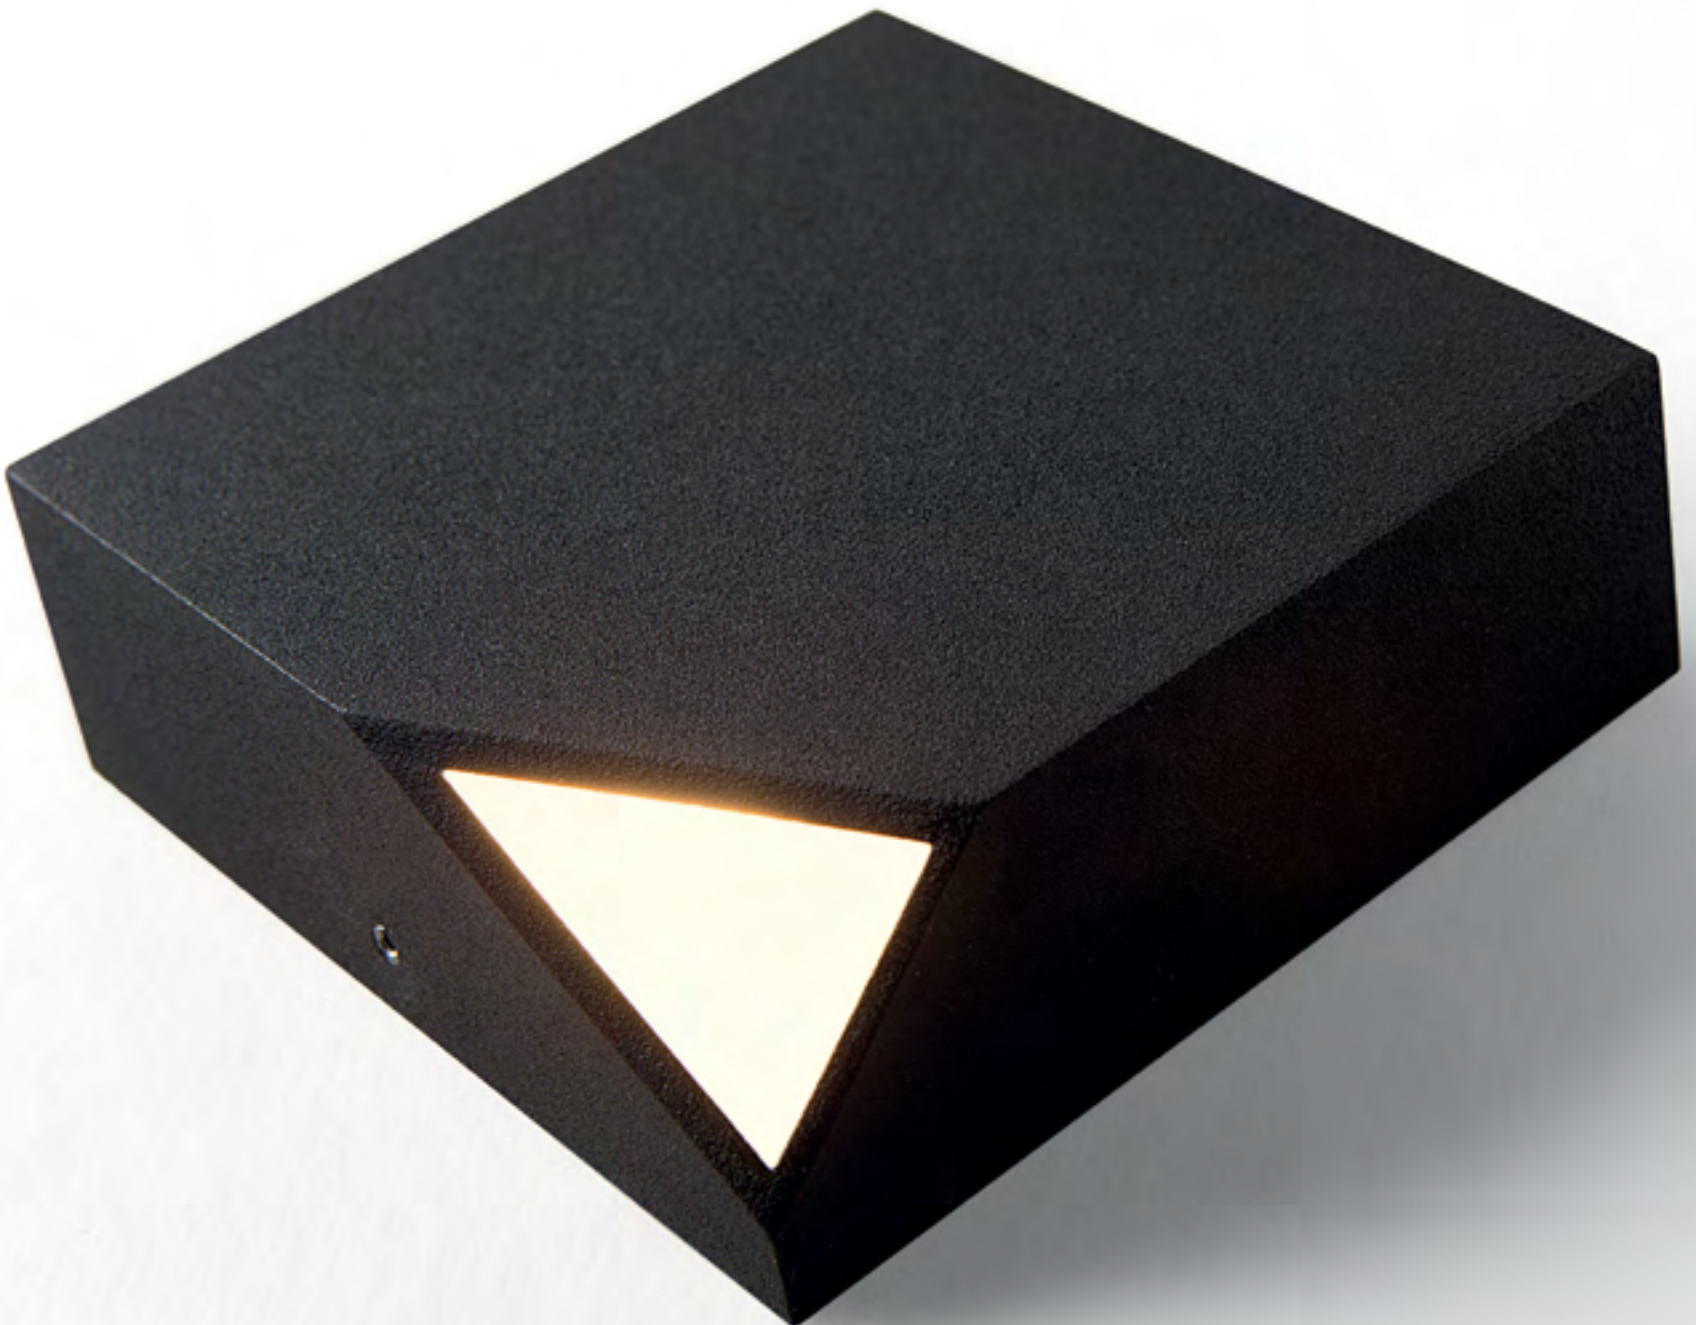

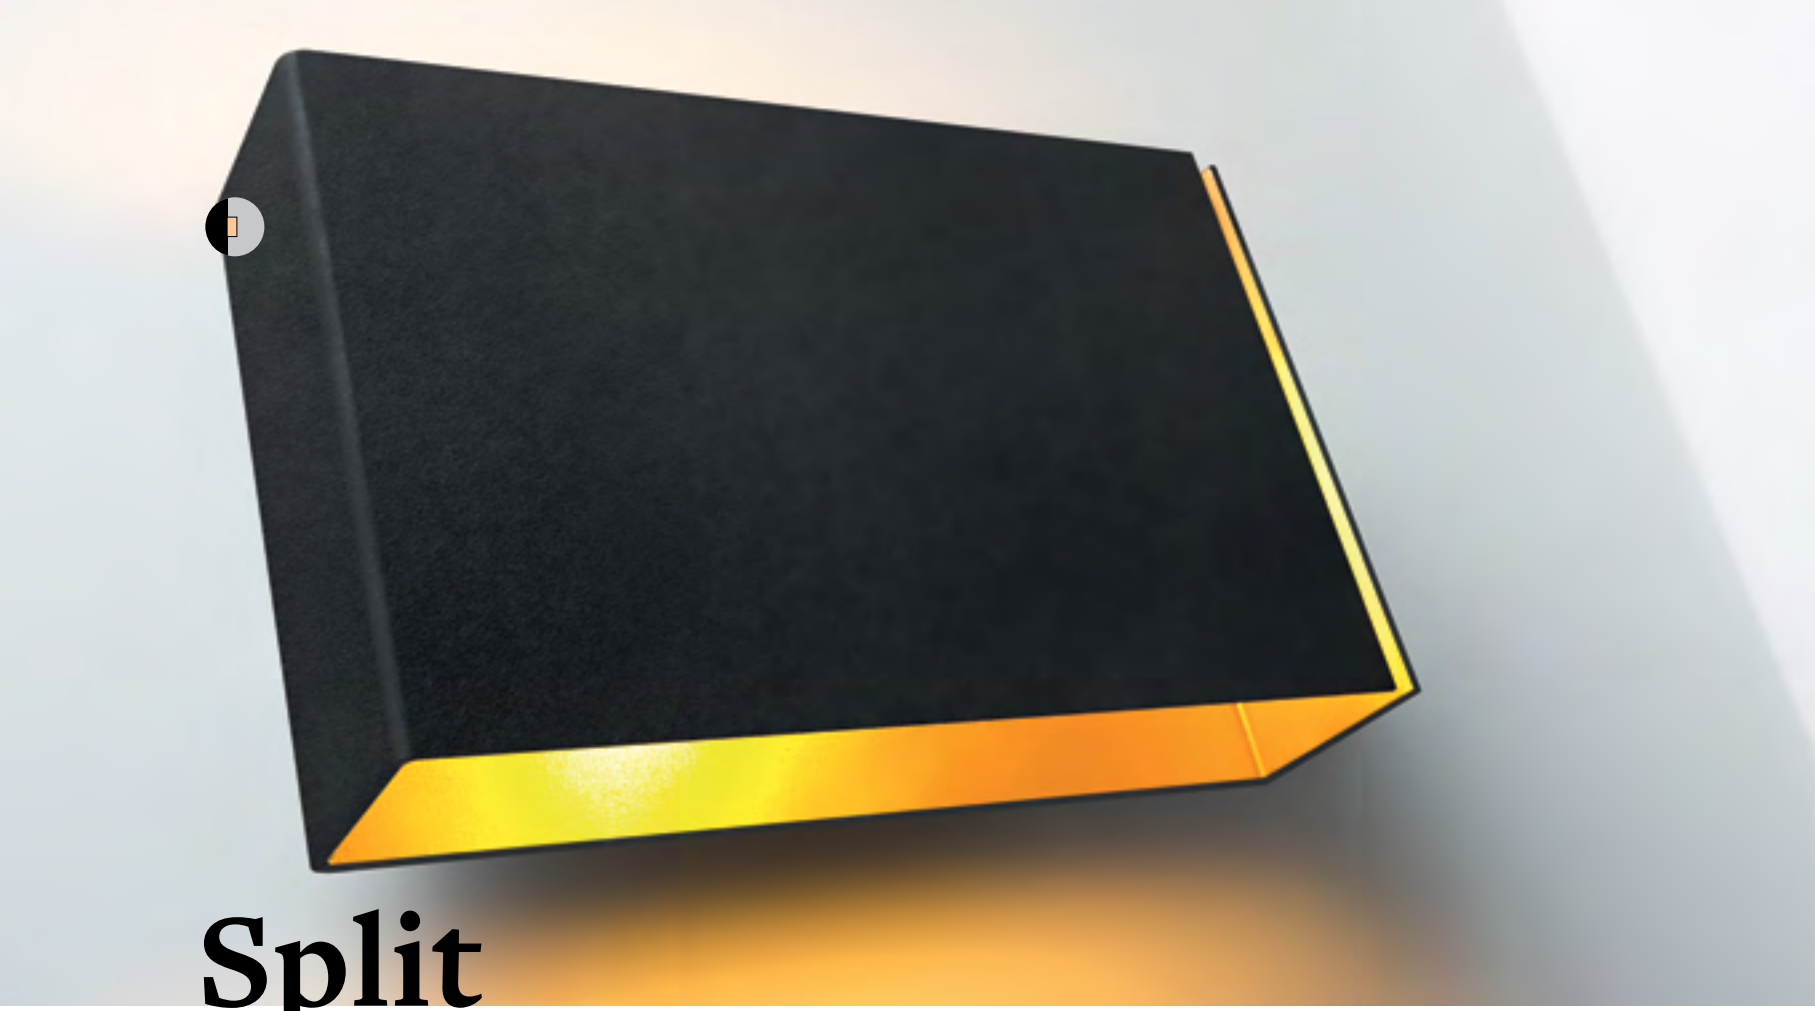

Split

Split is the result of improved folding techniques. It is a wall-mounted up- and downlighter which consists of a single folded plate with a fine slit from which the light radiates. Split's asymmetrical design makes it ideal for areas that would benefit from mood lighting, such as living rooms, bedrooms or hallways. Available in a white or black structure and a white, black or gold interior which creates a warm glowing light.

design in cooperation with couvreur-devos

SUPERMODULAR.COM/EN/SPLIT

ECO LED

Split small LED

230V | R,C | IP20 | GWT 960° | 1.05KG





TRAILING EDGE DIMMABLE	2700K / CRI80+
black struc (gold interior)	**12600032**
black struc (white struc interior)	**12600037**
white struc (black interior)	**12600029**
white struc (gold interior)	**12600089**

1X LED ARRAY 230V INCL. | 4.5W

ECO LED

Split medium LED

230V | R,C | IP20 | GWT 960° | 1.90KG



TRAILING EDGE DIMMABLE	2700K / CRI80+
black struc (gold interior)	**12602132**
black struc (white struc interior)	**12602137**
white struc (black interior)	**12602129**
white struc (gold interior)	**12602189**

2X LED ARRAY 230V INCL. | 4.5W

ECO LED

Split large LED

230V | R,C | IP20 | GWT 960° | 2.50KG





TRAILING EDGE DIMMABLE	2700K / CRI80+
black struc (gold interior)	**12604132**
black struc (white struc interior)	**12604137**
white struc (black interior)	**12604129**
white struc (gold interior)	**12604189**

2X LED ARRAY 230V INCL. | 4.5W

Split

SPLIT, DUELL
BRASSERIE JEAN LAMOUR, NANCY (FR)
JEAN LUC HEMMER ARCHITECTE

SPLIT
CREUNA, STOCKHOLM (SW)
RONNIE ECKERVIG

Split

SPLIT LARGE

SPLIT SMALL

SPLIT MEDIUM

see also:

p. 334

Spock

Spock is part of an extraterrestrial population at Modular, united by their powerful, ultra-thin LED lighting disc. Spock conceals all its ingenious workings in one slender housing. Here, the design reinforces its functionality. A unique tilting system makes the lighting disc highly directional. Be creative with Spock by placing it in a straith line or by putting in a more playful setting. Spock is available in different beam angles and different colour temperatures. Spock track version is well suited for using in a retail environment.

design in cooperation with couvreur-devos

SUPERMODULAR.COM/EN/SPOCK

ECO LED GI

Spock wall LED GI





1X LED DISC INCL. 18W

! 4000K ON REQUEST

Friends of hue | 230V | IP20 | GWT 960° | 2.20KG

NOT DIMMABLE	2700K / CRI80		3000K / CRI80	
	30°	55°	30°	55°
black struc	**11394132**	**11394232**	**11391132**	**11391232**
white struc	**11394109**	**11394209**	**11391109**	**11391209**

DALI/PUSHDIM/1-10V*	2700K / CRI80		3000K / CRI80	
	30°	55°	30°	55°
black struc	**11394532**	**11394632**	**11391532**	**11391632**
white struc	**11394509**	**11394609**	**11391509**	**11391609**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(medium white struc)

2700K / 30°	**977lm 14.2W**
3000K / 30°	**1026lm 18W**

CONNECTED	*ONLY IN COMBINATION WITH 1-10V
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

Spock

SPOCK
LE METTIS, METZ (FR)
DENU ET PARADON

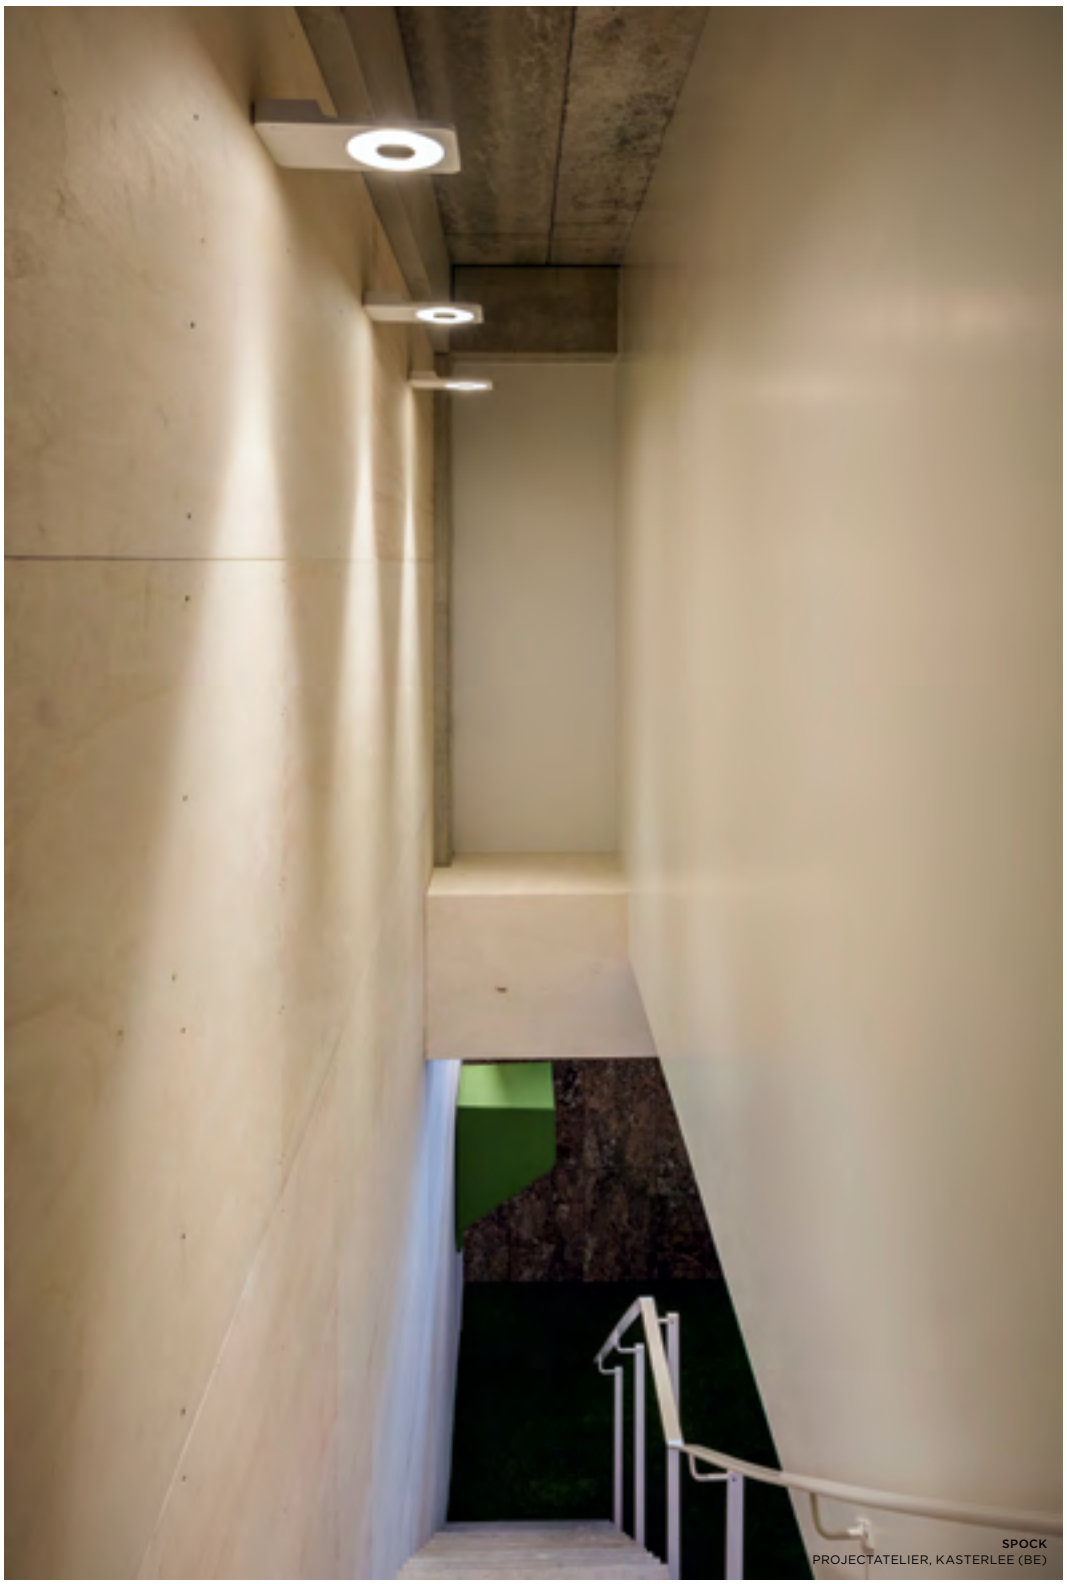

SPOCK
PROJECTATELIER, KASTERLEE (BE)

p. 526

Sulfer

Sulfer is a minimalist square-shaped fixture. The cast aluminium luminaire brings a modern accent to walls, whether in- or outside (IP54) homes, hotels, restaurants, etc.

By default, Sulfer diffuses a wide beam (flood), yet the fixture comes optionally with additional beam angle plates (medium and small) to let you customize the beam. Since the diffuser is recessed into the casing, Sulfer shines indirect light, ensuring you will never be blinded by its beam.

SUPERMODULAR.COM/EN/SULFER

NEW ECO LED GI

Sulfer LED GI



2X LED ARRAY INCL. 3W

TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+
black struc	13270032	13270132
white struc	13270009	13270109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

2700K	399lm 8W
3000K	412lm 8W

OPTICAL	
13271009	SMALL BEAM APERTURE PLATES WHITE STRUC
13271032	SMALL BEAM APERTURE PLATES BLACK STRUC
13271109	MEDIUM BEAM APERTURE PLATES WHITE STRUC
13271132	MEDIUM BEAM APERTURE PLATES BLACK STRUC


SMALL BEAM APERTURE PLATE

MEDIUM BEAM APERTURE PLATE

NEW ECO LED GI

Sulfer LED IP54 GI





2X LED MODULE INCL. 3W

	3000K / CRI90+
black struc	13270232
white struc	13270209

OPTICAL	
13271209	SMALL BEAM APERTURE PLATES IP54 WHITE STRUC
13271232	SMALL BEAM APERTURE PLATES IP54 BLACK STRUC
13271309	MEDIUM BEAM APERTURE PLATES IP54 WHITE STRUC
13271332	MEDIUM BEAM APERTURE PLATES IP54 BLACK STRUC

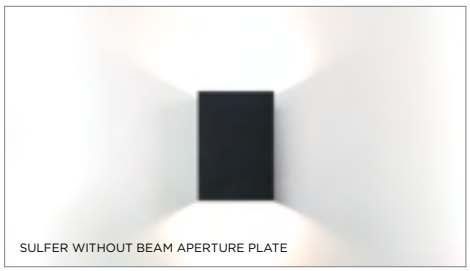
SULFER WITHOUT BEAM APERTURE PLATE

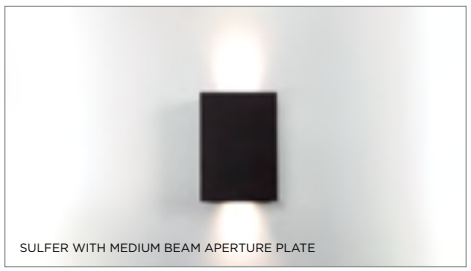
SULFER WITH MEDIUM BEAM APERTURE PLATE

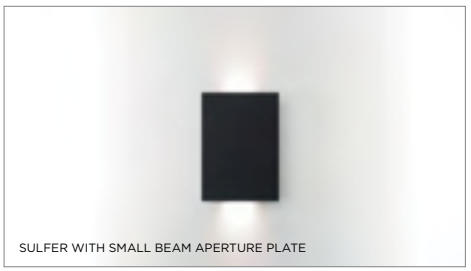
SULFER WITH SMALL BEAM APERTURE PLATE

Sulfer

SULFER

SULFER

SULFER
PRIVATE RESIDENCE, AMSTERDAM (NL)

Sulfer

SULFER
PRIVATE RESIDENCE, AMSTERDAM (NL)

Trapz

With their indirect lighting and subtle shadow effects, wall fixtures are undoubtedly atmosphere creators. Trapz, our organic interpretation inspired by a trapezium, is no different. The flattened cylinder has been finished with two oblique openings, which allow you to see the contrasting interior of the luminaire and immediately create an unusual chiaroscuro effect.

SUPERMODULAR.COM/EN/TRAPZ

ECO LED

Trapz LED



2X LED ARRAY 230V INCL. 4.5W

230V | R,C | IP20 | GWT 960° | 1.20KG

TRAILING EDGE DIMMABLE	2700K / CRI80
black struc (gold interior)	**12590132**
cacao bronze (black interior)	**12590168**
metallic blue (alu interior)	**12590169**
silky grey (champagne interior)	**12590159**
white struc (champagne interior)	**12590109**

HALOGEN 230V

Trapz 1x R7s





1X QT-DE | R7S | MAX. 150W

230V | R | IP20 | GWT 960° | 1.20KG

RESISTIVE DIMMABLE	
black struc (gold)	**12592032**
white struc (champagne interior)	**12592009**

Trapz

TRAPZ
PRIVATE RESIDENCE, ROTTERDAM (NL)
LINDA LAGRAND INTERIOR DESIGN

TRAPZ
HAVN, ANTWERPEN (BE)
.MAX INTERIEURARCHITECTEN

Wollet

In their homes, people love understated lighting solutions that create a cosy, cocoon-like atmosphere. Wollet disseminates beautiful diffused light using OLED. A one-fold fixture, it consists of three components: a tight casing, a paper-thin OLED light source and a special hinge which not only allows the light plate to tilt by up to 180°, but also changes the look and feel of the luminaire. Technology and driver are seamlessly integrated into the device, without any visible screws – as befits a Modular lighting solution.

SUPERMODULAR.COM/EN/WOLLET

NEW ECO LED GI

Wollet OLED GI



1X OLED INCL. 2.8W

230V | IP20 | GWT 960° | 1.48KG

	3000K / CRI90+
black struc	13250032
white struc	13250009

LUMINAIRE OUTPUT & POWER CONSUMPTION
(white struc)

3000K	148lm 3.5W

Wollet

WOLLET
PRIVATE RESIDENCE, AMSTERDAM (NL)

WOLLET

Wollet

WOLLET, NOMAD
PRIVATE RESIDENCE, AMSTERDAM (NL)

Exterior

460 *A(r)mor*
464 *Buzze*
468 *Duell*
472 *Fall*
474 *Fuser*
478 *George*
482 *Gutter*
484 *Hipy*
492 *Hit-me*
494 *Julien round*
498 *Julien square*
502 *Kabaz*
506 *Lotis tubed*
508 *Lowie*
510 *Lowieze*
514 *Nude*
518 *Portfolio*
522 *Skifv*
526 *Sulfer*

Exterior

floor

A(r)mor
461

Buzze
465



Fall
473

George
479



Gutter
483



Hipy
485

Hit-me
493

Julien round
495

Julien square
499

Kabaz
504

Lowieze
511



Portfolio
519



Skifv
523

wall

A(r)mor
461

Duell
469

Fuser
475

Julien round
495

Julien square
499



Kabaz
503

Lowie
509

Nude
515



Skifv
523



Sulfer
527

surface

Lotis tubed
507

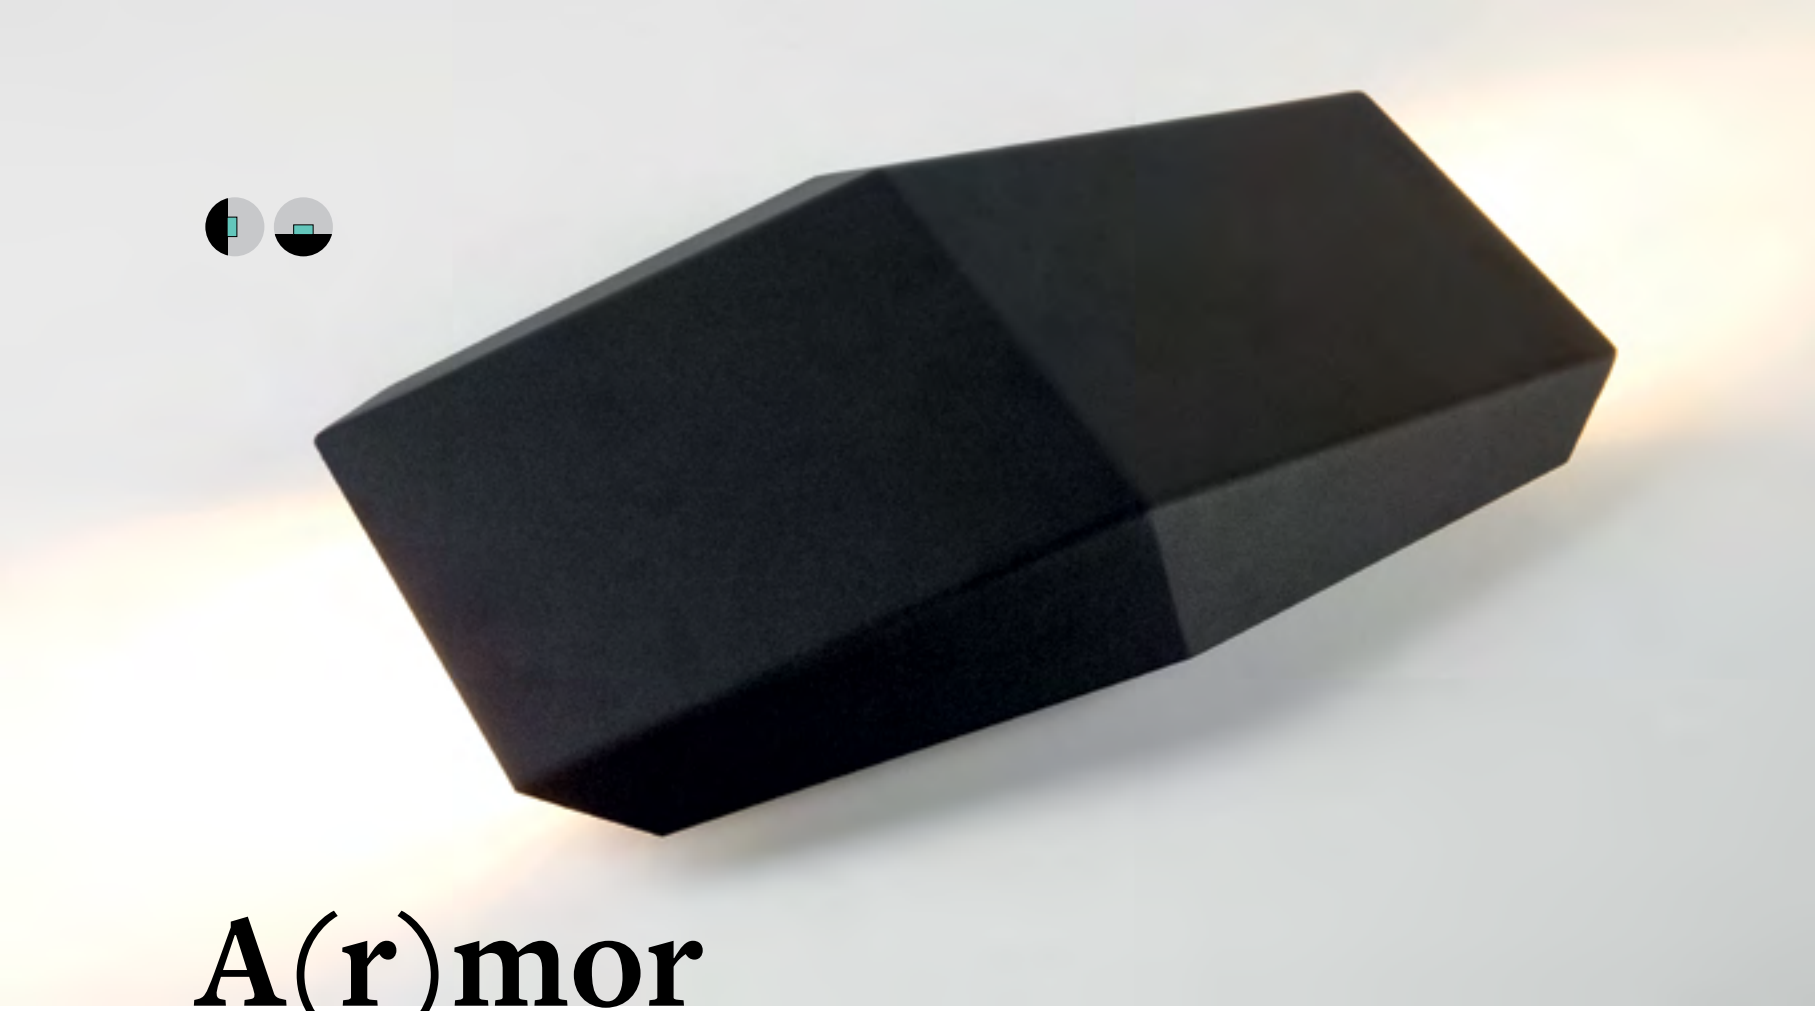

A(r)mor

Stealth bombers are based on a special geometrical design to remain invisible on the radar. This served as inspiration for A(r)mor's sleek design. The low-level garden fixture unobtrusively lights up your (garden) path, terrace or façade with its wide LED beam. A(r)mor is available in a single version (uplighter or downlighter) or as A(r)mor double (uplighter and downlighter).

design in cooperation with rotorgroup

SUPERMODULAR.COM/EN/ARMOR

ECO LED

A(r)mor IP67 LED GI



3X HIGH POWER LED INCL. 1W

230V | IP67 | GWT 960° | 2.80KG

	3000K / CRI90+
black struc	**11170832**
khaki	**11170822**

INSTALLATION

11189802	EARTHPIN H350

ECO LED

A(r)mor double IP67 LED GI





6X HIGH POWER LED INCL. 1W

230V | IP67 | GWT 960° | 3.30KG

	3000K / CRI90+
black struc	**11170932**
khaki	**11170922**

INSTALLATION

11189802	EARTHPIN H350

A(R)MOR
PRIVATE RESIDENCE, MURCIA (ES)
ARQUITECTURA DE BARRIO / FRANCISCO CASCALES LD

3

Buzze

Buzze is a movable and portable fitting which generates a soft, diffuse light. Use the dimmer function on the power button to create the atmosphere of your choice. Buzze has a sleek design. Although mainly an outdoor fitting, it is finished to the same high-quality standards as an indoor fitting. And if it gets too cold outside, simply take Buzze inside with you to keep this unforgettable evening going.

SUPERMODULAR.COM/EN/BUZZE

ECO LED

Buzze IP54 LED GI



230V | IP54 | GWT 650° | 3.20KG

PUSHDIM	2700K / CRI80+
black struc	**12581008**
khaki	**12581022**
white struc	**12581009**

2X HIGH POWER LED INCL. 6.5W

! CABLE (5M) INCLUDED
! PUSHDIM-BUTTON INTEGRATED

INSTALLATION

11189302	EARTHPIN H350

Buzze

BUZZE
MOBILIA WOONSTUDIO, AMSTERDAM (NL)

BUZZE
PRIVATE RESIDENCE, OEKENE (BE)

see also:

p. 42

p. 42

p. 392

Duell

With its perfectly fitted glazing on top and bottom this version of Duell is fitted to be used in moisty rooms such as bathrooms or even terraces. Connect indoor with outdoor. The IP version allows you to achieve complete continuity in your home, right through to the bathroom or terrace.

SUPERMODULAR.COM/EN/DUELL

ECO LED

Duell wall IP44 2x LED GI

230V | IP44 | GWT 960° | 0.85KG





	3000K / CRI90+	4000K / CRI90+
black struc (gold interior)	**11071132**	**11071232**
white struc (champagne interior)	**11071109**	**11071209**

2X HIGH POWER LED INCL. | 2W

Duell

DUELL
DE BOSCHVIJVER, APELDOORN (NL)
MAAS ARCHITECTEN / LOLAB, MICHEL ARENDS

DUELL
PRIVATE RESIDENCE, CHARLOTTENLUND (DK)

Fall

In Belgium, Modular's birthplace, the prevailing wind forces trees to grow at odd angles alongside several canals. A powerful image, which inspired the design of Fall, although in more minimalist lines. This exterior fixture is at a 10° angle and therefore seems to be bending slightly in the wind. The semi-transparent polycarbonate ensures diffused light. Available in various heights and colours. A ground stake is available for installation in soft ground.

SUPERMODULAR.COM/EN/FALL

ECO LED

Fall 1.3 IP54 LED GI

230V | IP54 | GWT 960° | 1.94KG



	3000K / CRI80
black struc	11180632
white struc	11180609

INSTALLATION

11189102	EARTHPIN H350 WITH SQUARE PLATE 100X100

1X LED-STRIP 24V INCL. | 7W

ECO LED

Fall 1.2 IP54 LED GI

230V | IP54 | GWT 960° | 2.60KG





	3000K / CRI80
black struc	11180732
white struc	11180709

INSTALLATION

11189102	EARTHPIN H350 WITH SQUARE PLATE 100X100

1X LED-STRIP 24V INCL. | 9.8W

ECO LED

Fall 1.1 IP54 LED GI

230V | IP54 | GWT 960° | 3.60KG



	3000K / CRI80
black struc	11180832
white struc	11180809

INSTALLATION

11189102	EARTHPIN H350 WITH SQUARE PLATE 100X100

1X LED-STRIP 24V INCL. | 16.8W

see also:
p. 406

Fuser

This impressive luminaire will both draw your attention and highlight the outdoor. Fuser is at its best wall-mounted to safeguard your entrance or your outdoor spaces. Its 'industrial look' blends in perfectly with all kinds of architecture. Fuser contains fluorescent lamps and a diffuser to soften the light.

SUPERMODULAR.COM/EN/FUSER

ECO FLUORESCENT

Fuser single IP54 2x 21W GI

230V | IP54 | GWT 960° | 5.49KG





dark grey	11100811
white struc	11101811

2X T16 | G5 | 21W

! DARK GREY VERSION INCLUDES ORANGE CABLE
! WHITE STRUC VERSION INCLUDES BLACK CABLE

ECO FLUORESCENT

Fuser double IP54 4x 21W GI

230V | IP54 | GWT 960° | 10.80KG





dark grey	11100911
white struc	11101911

4X T16 | G5 | 21W

! DARK GREY VERSION INCLUDES ORANGE CABLE
! WHITE STRUC VERSION INCLUDES BLACK CABLE

Fuser

FUSER
PRIVATE RESIDENCE, BRETAGNE (FR)
STUDIO REGIS DALLIER

FUSER
PRIVATE RESIDENCE, OISTERWIJK (NL)
WWW.SCHUIVELING.NL

George

Outdoor butler George creates an atmospheric, indirect light which emanates from the upper housing and glides along the inside. Colourful or plain? The options are endless and despite its robust cylinder shape, there is something light about George. This is because of the recessed base, which makes George look like it is floating. Finally, George does not mind the rain: thanks to the rounded top, the water simply flows down this light fitting.

design in cooperation with rotorgroup

SUPERMODULAR.COM/EN/GEORGE

HALOGEN 230V

George IP54 GU10



1X QPAR 16 | GU10 | MAX. 35W

anthracite gray structure (blue structure interior)	**12710073**
anthracite gray structure (cream white structure interior)	**12710071**
anthracite gray structure (yellow structure interior)	**12710074**
black structure (blue structure interior)	**12710063**
black structure (cream white structure interior)	**12710061**
black structure (red structure interior)	**12710062**
black structure (yellow structure interior)	**12710064**
brown structure (cream white structure interior)	**12710081**
brown structure (yellow structure interior)	**12710084**

* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED	
70000613	PHILIPS HUE RGB GU10 BULB 6.5W
70000621	PHILIPS HUE TUNABLE WHITE GU10 BULB 5.5W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

INSTALLATION	
11189802	EARTHPIN H350

BLACK STRUCTURE
(CREAM STRUCTURE INTERIOR)

BLACK STRUCTURE
(RED STRUCTURE INTERIOR)

BLACK STRUCTURE
(BLUE STRUCTURE INTERIOR)

ANTHRACITE GREY STRUCTURE
(CREAM WHITE STRUCTURE INTERIOR)

ANTHRACITE GREY STRUCTURE
(YELLOW STRUCTURE INTERIOR)

BROWN STRUCTURE
(CREAM WHITE STRUCTURE INTERIOR)

George

GEORGE
PRIVATE RESIDENCE, OEKENE (BE)

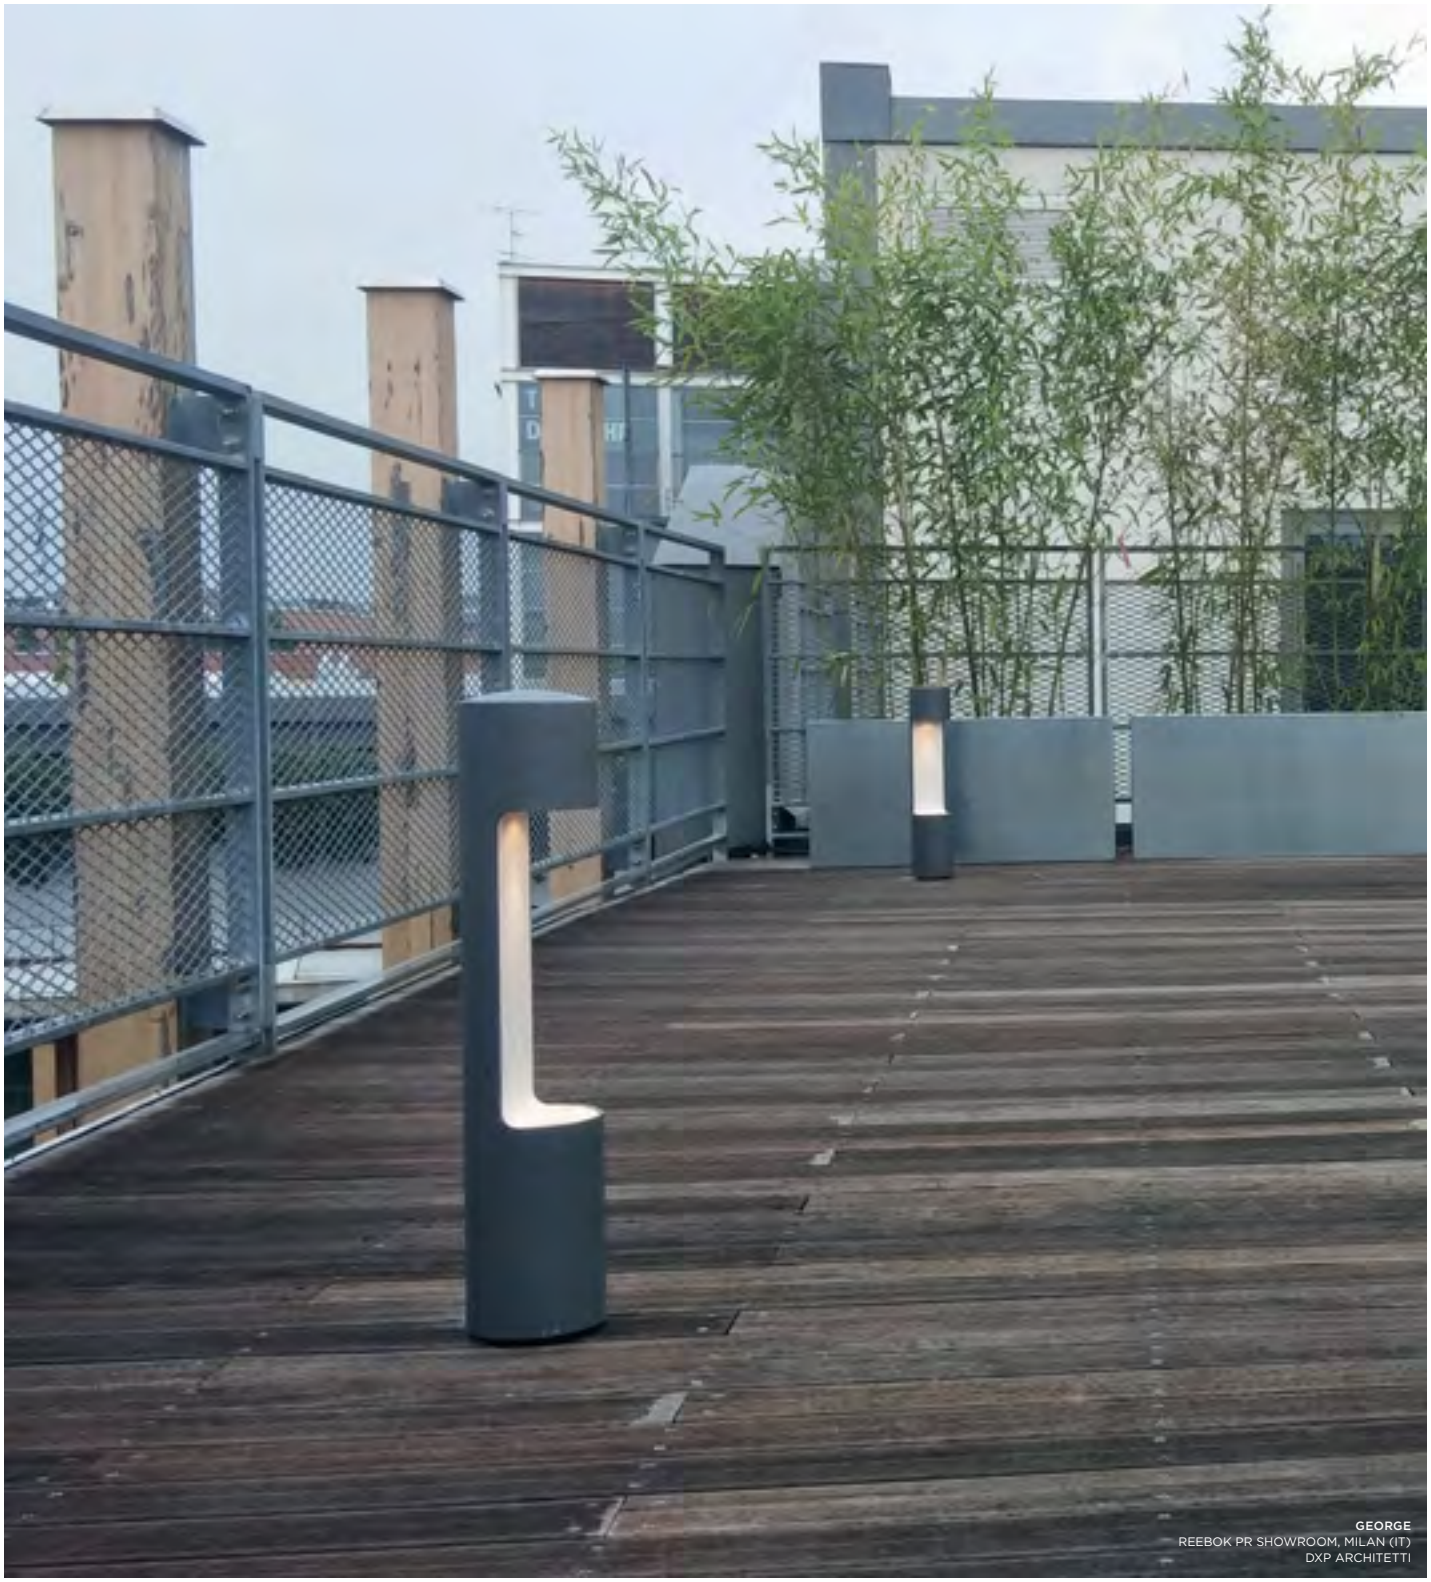

GEORGE
REEBOK PR SHOWROOM, MILAN (IT)
DXP ARCHITETTI

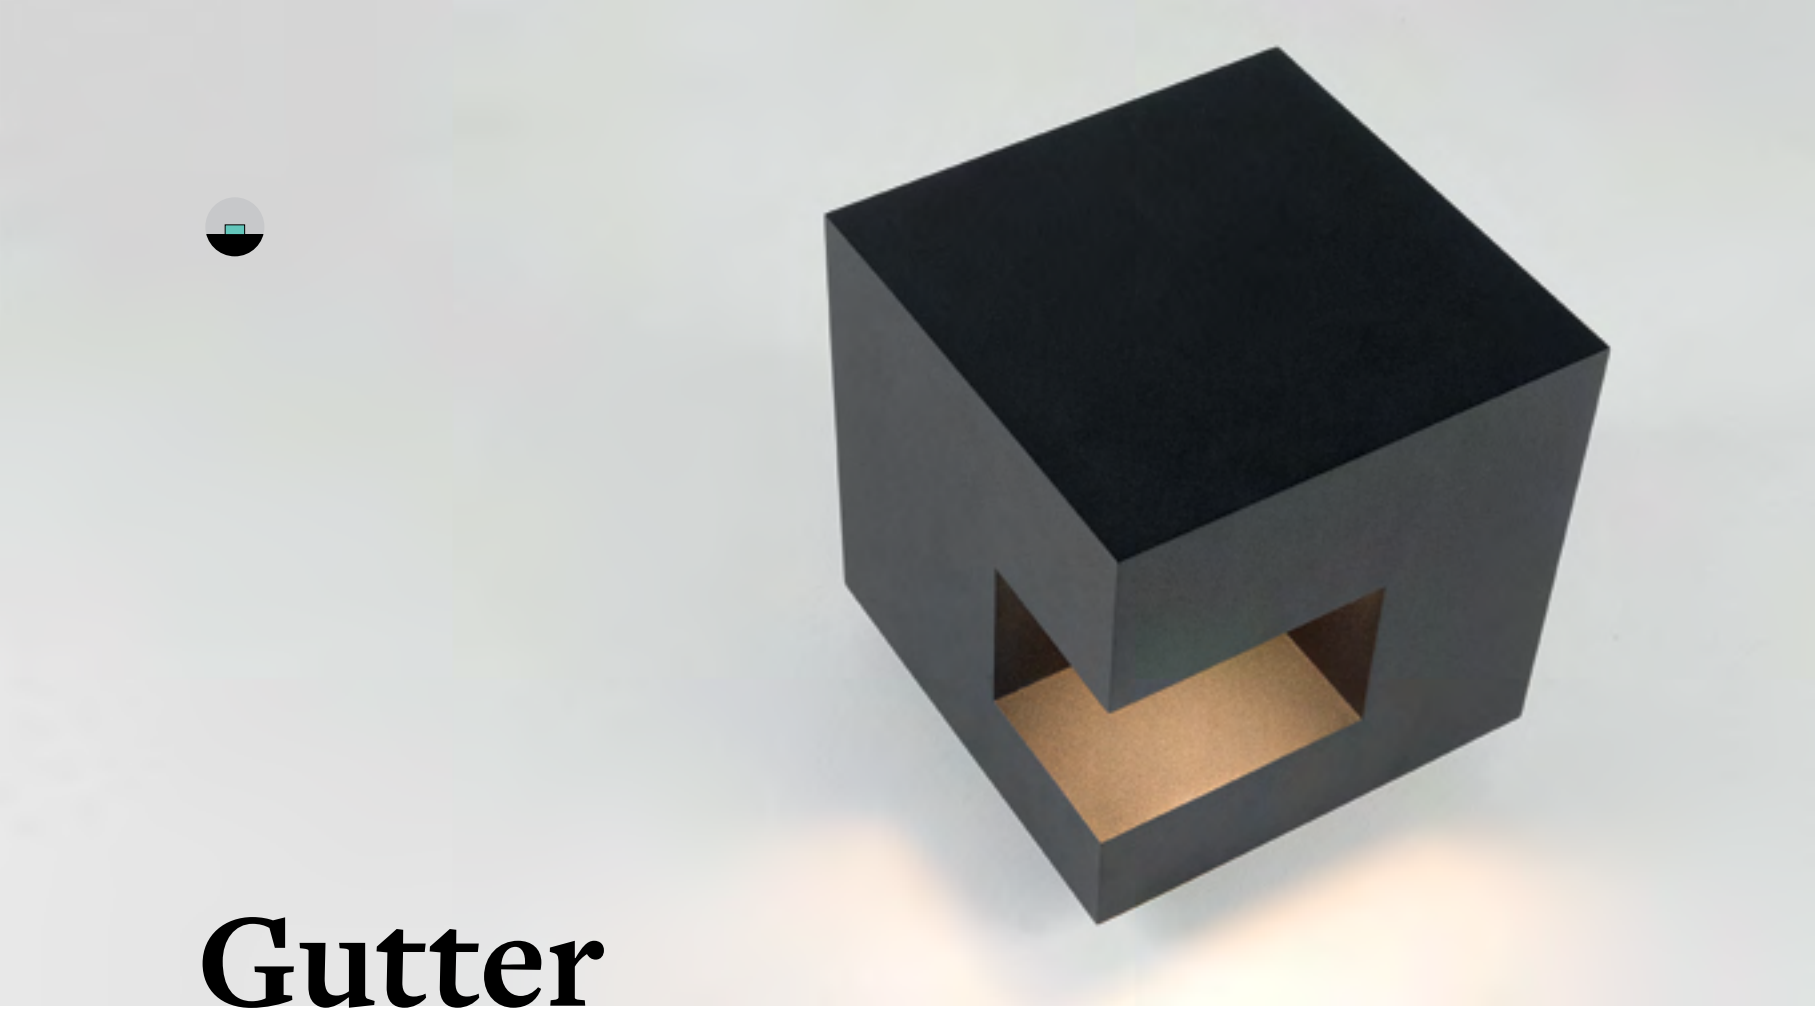

Gutter

Gutter is a faithful follower of cubism and is based on a cube, but has asymmetrical lines to keep things exciting. The play of light is also unusual. The asymmetrical structure allows Gutter to distribute the light diagonally from one corner. The ground stake also allows Gutter to be secured to softer grounds.

SUPERMODULAR.COM/EN/GUTTER

ECO LED

Gutter IP55 LED GI

230V | R,C | IP55 | GWT 960° | 5.50KG



TRAILING EDGE DIMMABLE	2700K / CRI80
black struc	11191032

1X LED ARRAY 230V INCL. | 4.5W

INSTALLATION

11189002	EARTHPIN H350 WITH SQUARE PLATE 150X150

GUTTER
SHOWROOM KUSCH+CO, ST-LAMBRECHTS-WOLUWE (BE)
MARKEY & SCHELSTRAETE

Hipy

With its IP67 rating and LED light source, Hipy is the perfect outdoor ground spot. Since the light beam does not generate any heat, you can safely walk over it barefoot, like a true hippy. Hipy is available in round and square variants. Besides the traditional Hipy, we also offer an asymmetrical version, which makes an ideal facade spotlight. Last but not least, Hipy is also available with sunglasses, i.e. an anti-glare grid. Hipy now comes with updated LED, featuring some slight visual differences: our Hipy 70 model is fitted with a full-size reflector and Hipy 110 features a smaller, central reflector.

SUPERMODULAR.COM/EN/HIPY

ECO LED GE

Hipy 70 IP67 LED GE





1X LED ARRAY INCL. 3.1W

	3000K / CRI90+
	40°
alu	**12374305**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(40° alu)

	350mA
3000K / 40°	**262lm 3.1W**

DRIVER	SEE DRIVER MATRIX

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
12379630	RENOVATION CONBOX Ø73 H151
12379830	CONBOX 145X75X123

ECO LED GE

Hipy 70 anti glare IP67 LED GE





1X LED ARRAY INCL. 3.1W

	3000K / CRI90+
	25°
alu	**12374205**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° alu)

	350mA
3000K / 25°	**130lm 3.1W**

DRIVER	SEE DRIVER MATRIX

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
12379630	RENOVATION CONBOX Ø73 H151
12379830	CONBOX 145X75X123

Hipy

ECO LED GE

Hipy square 70x70 IP67 LED GE





1X LED ARRAY INCL. 3.1W

	3000K / CRI90+
	40°
alu	12374105

LUMINAIRE OUTPUT & POWER CONSUMPTION
(40° alu)

	350mA
3000K / 40°	**262lm 3.1W**

DRIVER	SEE DRIVER MATRIX

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
12379730	RENOVATION CONBOX 75X73X151
12379930	CONBOX 145X75X95

ECO LED GE

Hipy square 70x70 anti glare IP67 LED GE





1X LED ARRAY INCL. 3.1W

	3000K / CRI90+
	25°
alu	12374005

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° alu)

	350mA
3000K / 25°	**130lm 3.1W**

DRIVER	SEE DRIVER MATRIX

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
12379730	RENOVATION CONBOX 75X73X151
12379930	CONBOX 145X75X95

ECO LED GE

Hipy 110 IP67 LED GE





1X LED ARRAY INCL. 9.2W

	3000K / CRI90+
	40°
alu	12345405

LUMINAIRE OUTPUT & POWER CONSUMPTION
(40° alu)

	350mA	**500mA**
3000K / 40°	408lm 6.2W	**547lm 9.2W**

DRIVER	SEE DRIVER MATRIX
CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR
INSTALLATION	
12349830	CONBOX Ø114 H165

ECO LED GE

Hipy 110 anti glare IP67 LED GE





1X LED ARRAY INCL. 9.2W

	3000K / CRI90+
	25°
alu	12345005

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° alu)

	350mA	**500mA**
3000K / 40°	227lm 6.2W	**304lm 9.2W**

DRIVER	SEE DRIVER MATRIX
CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR
INSTALLATION	
12349830	CONBOX Ø114 H165

ECO LED GE

Hipy 110 asy IP67 LED GE





1X LED ARRAY INCL. 9.2W

	3000K / CRI90+
	40°
alu	12345205

LUMINAIRE OUTPUT & POWER CONSUMPTION
(40° alu)

	350mA	**500mA**
3000K / 40°	258lm 6.2W	**346lm 9.2W**

DRIVER	SEE DRIVER MATRIX
CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR
INSTALLATION	
12349830	CONBOX Ø114 H165

Hipy

ECO LED GE

Hipy square 110x110 IP67 LED GE





1X LED ARRAY INCL. 9.2W

	3000K / CRI90+
	40°
alu	12346405

LUMINAIRE OUTPUT & POWER CONSUMPTION
(40° alu)

	350mA	500mA
3000K / 40°	408lm 6.2W	**547lm 9.2W**

DRIVER	SEE DRIVER MATRIX

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
12349930	CONBOX 115X115X150X251

ECO LED GE

Hipy square 110x110 anti glare IP67 LED GE





1X LED ARRAY INCL. 9.2W

	3000K / CRI90+
	25°
alu	12346005

LUMINAIRE OUTPUT & POWER CONSUMPTION
(25° alu)

	350mA	500mA
3000K / 25°	227lm 6.2W	**304lm 9.2W**

DRIVER	SEE DRIVER MATRIX

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
12349930	CONBOX 115X115X150X251

ECO LED GE

Hipy square 110x110 asy IP67 LED GE





1X LED ARRAY INCL. 9.2W

	3000K / CRI90+
	40°
alu	12346205

LUMINAIRE OUTPUT & POWER CONSUMPTION
(40° alu)

	350mA	500mA
3000K / 40°	258lm 6.2W	**346lm 9.2W**

DRIVER	SEE DRIVER MATRIX

CONNECTED	*WHEN CONNECTED TO 1-10V DRIVER
13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000847	PHILIPS HUE SENSOR

INSTALLATION	
12349930	CONBOX 115X115X150X251

HIPY 110X110 ANTIGLARE

Hipy

HIPY 110 ANTIGLARE

HIPY 110 ASY

HIPY
KORTRIJK (BE)

Hit-me

The Hit-me light makes it rain nails in the garden. This fluorescent outdoor lighting with its distinctive shape will add a surreal touch to any outdoor environment. The aluminium ground stake can be used to easily secure it in softer grounds.

SUPERMODULAR.COM/EN/HIT-ME

ECO FLUORESCENT

Hit-me IP55 TL5 GI



230V | IP55 | GWT 960° | 4.15KG

alu struc	10940119

1X T16 | G5 | 21W

! GROUND-TUBE FOR FIXATION IN SOIL INCLUDED

HIT-ME, KABAZ
KORTRIJK (BE)

Julien round

Julien round puts your garden features in the picture and is perfect for the task at hand. The round version is less prominent than its square family member. Julien with a ground stake is suitable for soft ground and Julien round foot with its fixed mounting plate is ideal as a wall fixture.

SUPERMODULAR.COM/EN/JULIEN-ROUND

ECO LED GI

Julien round foot IP54 LED GI





230V | IP54 | GWT 960° | 1.30KG

	3000K / CRI90+
	25°
black struc	**10731208**
khaki	**10731222**

N/AX HIGH POWER LED INCL. 4W

ECO LED GE

Julien round IP54 LED GE



350mA | IP54 | GWT 960° | 2.50KG

	3000K / CRI90+
	25°
black struc	**10731308**
khaki	**10731322**

DRIVER SEE DRIVER MATRIX

N/AX HIGH POWER LED INCL. 4W

Julien round

JULIEN ROUND

JULIEN ROUND
PRIVATE RESIDENCE, OEKENE (BE)

Julien square

Every garden has a feature that deserves to be in the spotlight. So why not rely on glamorous lighting to do so? Julien is perfect for the task at hand with an IP rate of 54, its adjustable length and tilting head. Julien with a ground stake is suited for softer grounds and Julien foot, with its fixed mounting plate, can be mounted on a wall or hard surfaces.

SUPERMODULAR.COM/EN/JULIEN-SQUARE

ECO LED GI

Julien square foot IP54 LED GI

230V | IP54 | GWT 960° | 1.30KG





	3000K / CRI90+
	25°
black struc	**10732208**
khaki	**10732222**

N/AX HIGH POWER LED INCL. 4W

ECO LED GE

Julien square IP54 LED GE

III | 350mA | IP54 | GWT 960° | 2.50KG



	3000K / CRI90+
	25°
black struc	**10732308**
khaki	**10732322**

DRIVER SEE DRIVER MATRIX

N/AX HIGH POWER LED INCL. 4W

Julien square

JULIEN SQUARE FOOT

JULIEN SQUARE FOOT

Julien square

JULIEN SQUARE

Kabaz

Kabaz has one sole purpose: to make your garden a wonderful place to hang out. Available as standard in white matte polycarbonate for a sleek lounge look. Add a Maroc plate for an oriental look or louvres for a sexy touch. The useful handle and five-metre cable allow you to place Kabaz (which means 'handbag' in West-Flemish) wherever you like. Also available for wall mounting.

SUPERMODULAR.COM/EN/KABAZ

ECO COMPACT FLUORESCENT

Kabaz wall IP44 E27



1X TC-TSE | E27 | MAX. 23W

Friends of hue | 230V | IP44 | GWT 960° | 8.40KG

black struc	**11130132**
desert	**11130133**
khaki	**11130122**
white struc	**11130109**

CONNECTED	
70000611	PHILIPS HUE WARM WHITE E27 BULB 9.5W
70000620	PHILIPS HUE TUNABLE WHITE E27 BULB 9.5W
70000612	PHILIPS HUE RGBW E27 BULB 9W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

ACCESSORIES	
11130409	KABAZ MAROC PLATE WHSTR
11130422	KABAZ MAROC PLATE KHAKI
11130432	KABAZ MAROC PLATE BLSTR
11130433	KABAZ MAROC PLATE DESERT
11130509	KABAZ LOUVRE PLATE WHSTR
11130522	KABAZ LOUVRE PLATE KHAKI
11130532	KABAZ LOUVRE PLATE BLSTR
11130533	KABAZ LOUVRE PLATE DESERT

ECO LED

Kabaz wall IP44 LED



1X LED E27 INCL. | E27 | 12W

230V | R.L | IP44 | GWT 960° | 8.60KG

LEADING EDGE DIMMABLE	2700K / CRI80
black struc	**11130732**
desert	**11130733**
khaki	**11130722**
white struc	**11130709**

ACCESSORIES	
11130409	KABAZ MAROC PLATE WHSTR
11130422	KABAZ MAROC PLATE KHAKI
11130432	KABAZ MAROC PLATE BLSTR
11130433	KABAZ MAROC PLATE DESERT
11130509	KABAZ LOUVRE PLATE WHSTR
11130522	KABAZ LOUVRE PLATE KHAKI
11130532	KABAZ LOUVRE PLATE BLSTR
11130533	KABAZ LOUVRE PLATE DESERT

Kabaz

ECO COMPACT FLUORESCENT

Kabaz floor IP44 E27



1X TC-TSE | E27 | MAX. 23W

! CABLE (5M) INCLUDED

Friends of hue | 230V | IP44 | GWT 960° | 6.60KG

black struc	**11130232**
desert	**11130233**
khaki	**11130222**
white struc	**11130209**

CONNECTED	
70000611	PHILIPS HUE WARM WHITE E27 BULB 9.5W
70000620	PHILIPS HUE TUNABLE WHITE E27 BULB 9.5W
70000612	PHILIPS HUE RGBW E27 BULB 9W
70000616	PHILIPS HUE BRIDGE EU
70000617	PHILIPS HUE BRIDGE UK
70000614	PHILIPS HUE DIMMER SWITCH
70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR

ACCESSORIES	
11130409	KABAZ MAROC PLATE WHSTR
11130422	KABAZ MAROC PLATE KHAKI
11130432	KABAZ MAROC PLATE BLSTR
11130433	KABAZ MAROC PLATE DESERT
11130509	KABAZ LOUVRE PLATE WHSTR
11130522	KABAZ LOUVRE PLATE KHAKI
11130532	KABAZ LOUVRE PLATE BLSTR
11130533	KABAZ LOUVRE PLATE DESERT

ECO LED

Kabaz floor IP44 LED



1X LED E27 INCL. | E27 | 12W

! CABLE (5M) INCLUDED

230V | R.L | IP44 | GWT 960° | 6.80KG

LEADING EDGE DIMMABLE	2700K / CRI80
black struc	**11130832**
desert	**11130833**
khaki	**11130822**
white struc	**11130809**

ACCESSORIES	
11130409	KABAZ MAROC PLATE WHSTR
11130422	KABAZ MAROC PLATE KHAKI
11130432	KABAZ MAROC PLATE BLSTR
11130433	KABAZ MAROC PLATE DESERT
11130509	KABAZ LOUVRE PLATE WHSTR
11130522	KABAZ LOUVRE PLATE KHAKI
11130532	KABAZ LOUVRE PLATE BLSTR
11130533	KABAZ LOUVRE PLATE DESERT

KABAZ
PRIVATE RESIDENCE, OOIGEM (BE)
D/M VERCRUYSSE INTERIEURARCHITECTEN

see also:

p. 128

p. 128

p. 410

Lotis tubed

Lotis tubed (IP44) is designated to use in bathrooms or in outdoor spaces. The ceiling mounted version contains an extra protection glass to prevent moist entering the fixture. The spotlight allows you to play with colour: go for a contrast between black, white and gold or choose a more uniform look instead.

SUPERMODULAR.COM/EN/LOTIS-TUBED

ECO LED

Lotis tubed surface IP44 LED retrofit

230V | R.L | IP44 | GWT 960° | 0.60KG





1X LED GU10 INCL. 5.4W

LEADING EDGE DIMMABLE	2700K / CRI90
	25°
black struc (gold interior)	**11450332**
black struc (white struc interior)	**11450337**
white struc (black interior)	**11450329**
white struc (gold interior)	**11450389**
white struc (white struc interior)	**11450309**

Lowie

Lowie is the noble member of a highly versatile outdoor family (IP54). Together with Lowieze, they will turn your garden into a theatre performance, putting specific areas under the spotlight. Lowie (for wall mounting) is a perfect example of form blending with function. The cylindrical light units can rotate fully around the body, which is also a cylinder, and can therefore be used as uplighters or downlighters independently of each other. Available with one or two light units.

SUPERMODULAR.COM/EN/LOWIE

ECO LED GI

Lowie IP54 1x LED GI

230V | IP54 | GWT 960° | 1.20KG





	3000K / CRI90+
	40°
black struc	**12670308**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(lumen value per lamp unit)

3000K / 40°	**208lm 5W**

1X HIGH POWER LED INCL. 4W

ECO LED GI

Lowie IP54 2x LED GI

230V | IP54 | GWT 960° | 1.60KG





	3000K / CRI90+
	40°
black struc	**12670408**

LUMINAIRE OUTPUT & POWER CONSUMPTION
(lumen value per lamp unit)

3000K / 40°	**208lm 9W**

2X HIGH POWER LED INCL. 4W

Lowieze

Lowieze is a highly versatile outdoor luminaire which comes in two heights. The lower is perfect for lighting a pathway. The higher version is more suitable for highlighting garden features. Form blends in perfectly with function. The cylindrical light units can rotate fully around the body, which is also a cylinder, and can therefore be used as uplighters or downlighters independently of each other. Available with one or two light units.

SUPERMODULAR.COM/EN/LOWIEZE

ECO LED GI

Lowieze low IP54 1x LED GI

230V | IP54 | GWT 960° | 1.70KG



	3000K / CRI90+
	40°
black struc	12671308

LUMINAIRE OUTPUT & POWER CONSUMPTION
(lumen value per lamp unit)

3000K / 40°	**208lm 5W**

INSTALLATION

11189802	EARTHPIN H350

1X HIGH POWER LED INCL. 4W

ECO LED GI

Lowieze low IP54 2x LED GI

230V | IP54 | GWT 960° | 2.08KG



	3000K / CRI90+
	40°
black struc	12671408

LUMINAIRE OUTPUT & POWER CONSUMPTION
(lumen value per lamp unit)

3000K / 40°	**208lm 9W**

INSTALLATION

11189802	EARTHPIN H350

2X HIGH POWER LED INCL. 4W

ECO LED GI

Lowieze high IP54 1x LED GI

230V | IP54 | GWT 960° | 1.90KG





	3000K / CRI90+
	40°
black struc	12672308

LUMINAIRE OUTPUT & POWER CONSUMPTION
(lumen value per lamp unit)

3000K / 40°	**208lm 5W**

INSTALLATION

11189802	EARTHPIN H350

1X HIGH POWER LED INCL. 4W

ECO LED GI

Lowieze high IP54 2x LED GI

230V | IP54 | GWT 960° | 2.30KG



	3000K / CRI90+
	40°
black struc	12672408

LUMINAIRE OUTPUT & POWER CONSUMPTION
(lumen value per lamp unit)

3000K / 40°	**208lm 9W**

INSTALLATION

11189802	EARTHPIN H350

2X HIGH POWER LED INCL. 4W

Lowieze

LOWIEZE
PRIVATE RESIDENCE, OEKENE (BE)

LOWIEZE

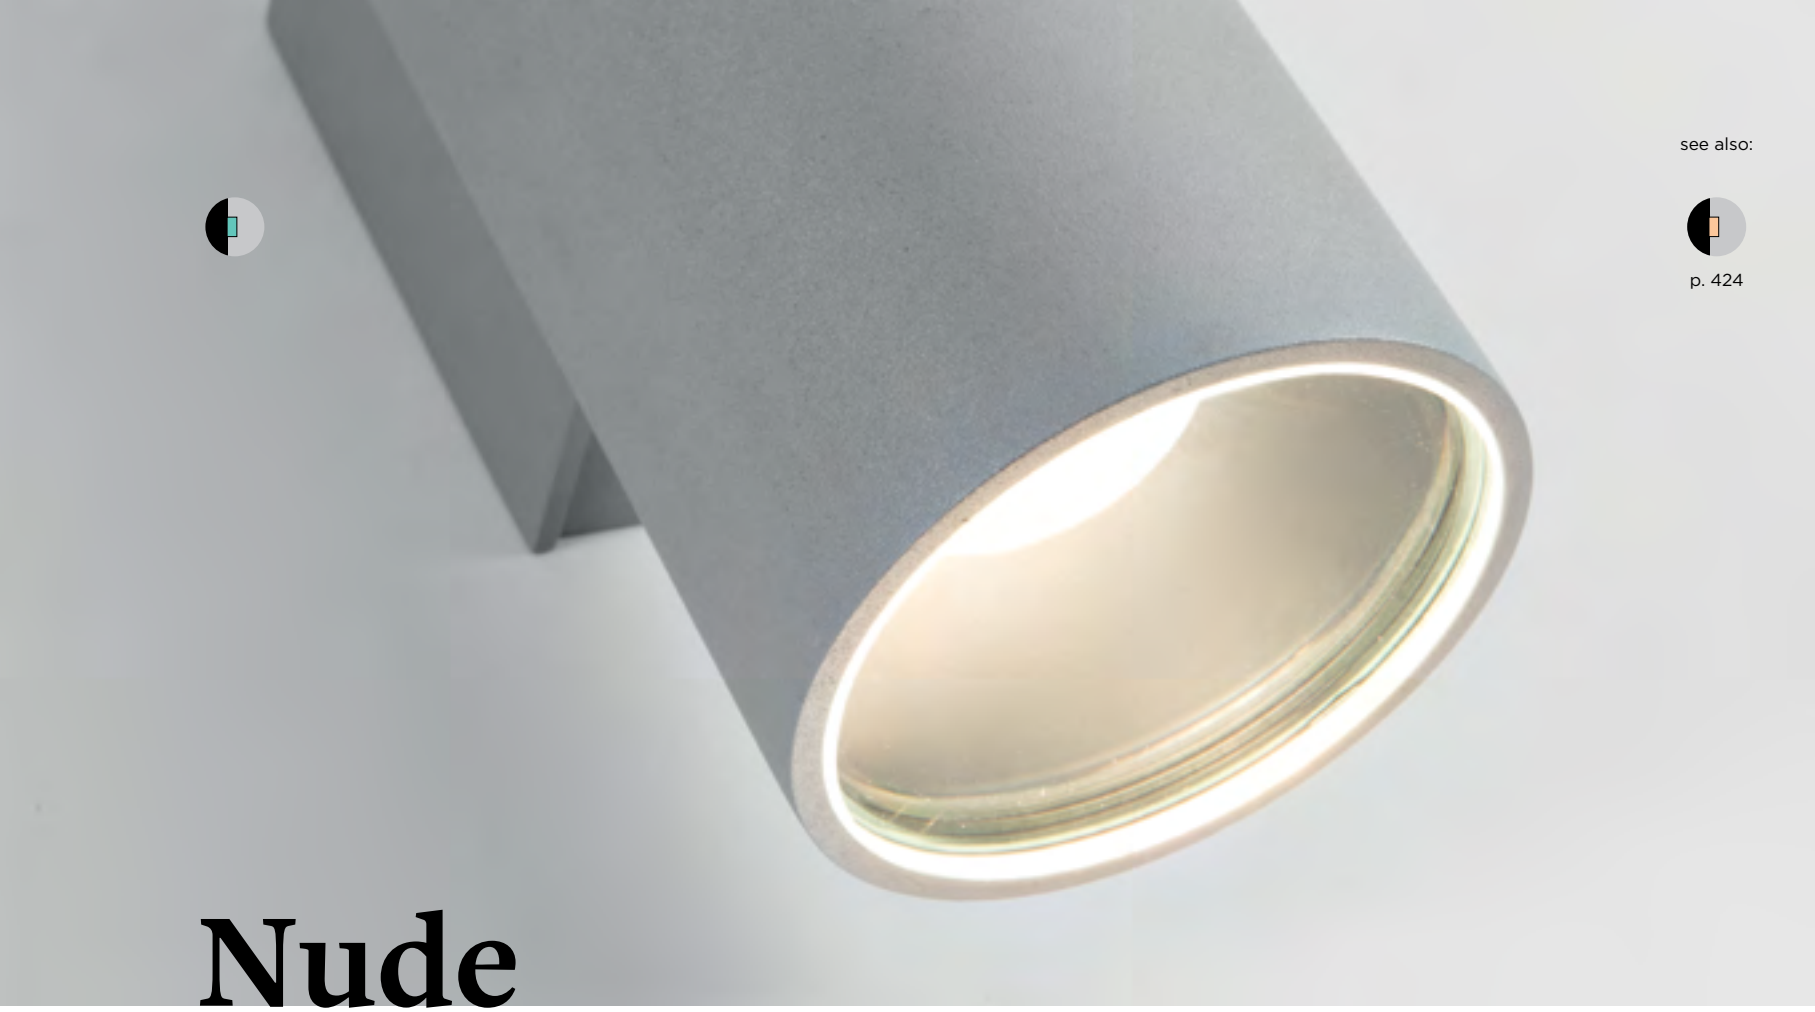

see also:

p. 424

Nude

Nude, IP55 version can be wall mounted at the entrance of a residence, highlighting the wall, at the entrance to a shop or on the terrace of your favourite bar. Both downlight and up- and downlight versions are available. A choice of colours: black, white or alu structure.

design in cooperation with joël claisse

SUPERMODULAR.COM/EN/NUDE

ECO LED GI

Nude wall IP55 1x LED GI



1X LED ARRAY INCL. 6.2W

230V IP55 GWT 960° 1.49KG

	3000K / CRI90+
	40°
alu struc	10923024
black struc	10923032
white struc	10923009

LUMINAIRE OUTPUT & POWER CONSUMPTION
(40° white struc)

3000K / 40°	321lm 8W

ECO LED GI

Nude wall IP55 2x LED GI



2X LED ARRAY INCL. 6.2W

230V IP55 GWT 960° 1.77KG

	3000K / CRI90+
	40°
alu struc	10923124
black struc	10923132
white struc	10923109

LUMINAIRE OUTPUT & POWER CONSUMPTION
(40° white struc)

3000K / 40°	642lm 13.1W

Nude

NUDE

NUDE
WATCHES OF SWITZERLAND, LUZERN (CH)
MÜLLER ARCHITEKTEN

Portfolio

Portfolio is an exterior fixture with the looks of an abstract lighting book. Inspired by standard paper sizes and streamlined sheets of paper, Portfolio shines an inspirational architectural light in any external environment.

design in cooperation with luc binst

SUPERMODULAR.COM/EN/PORTFOLIO

ECO LED

Portfolio 0.1 IP54 LED

230V | R,C | IP54 | GWT 960° | 2.97KG



TRAILING EDGE DIMMABLE	2700K / CRI80+
black struc	12830032
white struc	12830009

INSTALLATION

11189802	EARTHPIN H350

2X LED ARRAY 230V INCL. | 4.5W

ECO LED

Portfolio 0.2 IP54 LED

230V | R,C | IP54 | GWT 960° | 4.27KG



TRAILING EDGE DIMMABLE	2700K / CRI80+
black struc	12831132
white struc	12831109

INSTALLATION

11189802	EARTHPIN H350

2X LED ARRAY 230V INCL. | 4.5W

Portfolio

PORTFOLIO
PROJECTATELIER, KASTERLEE (BE)

PORTFOLIO

Skifv

Just like people, gnomes have also changed their architectural tastes in recent years. If you choose Skifv for your garden or outdoor project, you might well attract some unusual creatures. This LED fixture is available in a black or white structure and in two heights. Mount Skifv on the wall or use it on a hard substrate.

SUPERMODULAR.COM/EN/SKIFV

ECO LED

Skifv high IP54 LED GI



6X HIGH POWER LED INCL. 1W

230V | IP54 | GWT 960° | 2.50KG

	3000K / CRI90+
black struc	11210632
white struc	11210609

INSTALLATION

11189802	EARTHPIN H350

ECO LED

Skifv low IP54 LED GI



6X HIGH POWER LED INCL. 1W

230V | IP54 | GWT 960° | 2.50KG

	3000K / CRI90+
black struc	11210532
white struc	11210509

INSTALLATION

11189802	EARTHPIN H350

SKIFV
PRIVATE RESIDENCE, BRETAGNE (FR)
STUDIO REGIS DALLIER

see also:
p. 442

Sulfer

Sulfer is a minimalist square-shaped fixture. The cast aluminium luminaire brings a modern accent to walls, whether in- or outside (IP54) homes, hotels, restaurants, etc.

SUPERMODULAR.COM/EN/SULFER

ECO LED GI

Sulfer LED IP54 GI





2X LED MODULE INCL. 3W

230V IP54 GWT 960°

	3000K / CRI90+
black struc	**13270232**
white struc	**13270209**

OPTICAL	
13271209	SMALL BEAM APERTURE PLATES IP54 WHITE STRUC
13271232	SMALL BEAM APERTURE PLATES IP54 BLACK STRUC
13271309	MEDIUM BEAM APERTURE PLATES IP54 WHITE STRUC
13271332	MEDIUM BEAM APERTURE PLATES IP54 BLACK STRUC

Sulfer

SULFER
PRIVATE RESIDENCE, AMSTERDAM (NL)

Profiles

532 *Baseline*
534 *Drupl70*
544 *Freeway*
546 *H2A*
548 *H55*
554 *Halfpipe*
556 *MO6*
560 *MP78*
566 *SLD50*
578 *SLD75*
584 *SL75*
586 *SL100*
590 *SL149*
594 *SL micro*
598 *SL mini naked*
602 *SL mini poly in*
606 *SL mini poly out*
608 *SL nano poly out*
612 *(Small) 2Flat2C*

Profiles

Wall

Baseline
532



H2A
546

H55
548

SLD50
566

SL micro
594



SL nano poly out
608

(small) 2Flat2C
612

Surface



Drupl
534



MO6
556



MP78
560

SLD50
566

SLD75
578

SL75
584

SL100
586

SL149
590

SL micro
594

SL mini naked
598

SL mini poly in
602

Sl mini poly out
606

SL nano poly out
608

Profiles

Suspended



Drupl
534

H55
548



Halfpipe
554



MO6
556



MP78
560

SLD50
566

SLD75
578

SL75
584

SL100
586

SL149
590

SL micro
594

SL mini naked
598

SL mini poly in
602

Sl mini poly out
606

SL nano poly out
608

(small) 2Flat2C
612

Recessed

Freeway
544

SLD50
566

SLD75
578

SL75
584

SL100
586

SL149
590

SL micro
594

SL mini naked
598

SL mini poly in
602

Sl mini poly out
606

Baseline

Indirect lighting lines enhances the space and emphasize the architecture. Baseline is a cove lighting system offering a very subtile lighting experience created by integrating fluorescent modules or highly efficient LED strips.

SUPERMODULAR.COM/EN/BASELINE

LINEAR CUSTOM MADE | LIGHTING UNITS

Baseline Fortimo LED Line 3850lm/m	ECO LED
Baseline LED-strip /m mounted	ECO LED
Baseline Fortimo LED Line High Flux 6750lm/m	ECO LED
Baseline TL5 HE/HO continuous line down	ECO FLUORESCENT

LINEAR CUSTOM MADE

MOUNTING





with flange

100% CUSTOM MADE

CHOOSE REQUIRED MOUNTING, PROFILE LENGTH, COLOUR OF YOUR CHOICE, PREFERRED DIMMING, ...

NEED MORE INFO OR QUOTATION REQUEST?

CONTACT **PROFILES@SUPERMODULAR.COM**
OR CONSULT PDF VERSION OF CATALOGUE ON WEBSITE

Drupl70

Sunlight shining through raindrops creates eye-catching scenes, somehow mimicked by Drupl 70. The new-generation Drupl lighting solution is designed specifically for the office market: a great-looking, high-performance solution that is functional and easy to install. It features unique lenses, as an optical component combined with LED, which guarantee a very low UGR, perfectly in line with the requirements of EN12464-1 for offices.

SUPERMODULAR.COM/EN/DRUPL70

LINEAR CUSTOM MADE | LIGHTING UNITS

Drupl70 Fortimo LED Line 3850lm/m	ECO LED
Drupl70 Fortimo LED Line 2900lm/m	ECO LED
Drupl70 Fortimo LED Line 1925lm/m	ECO LED

LINEAR CUSTOM MADE

MOUNTING

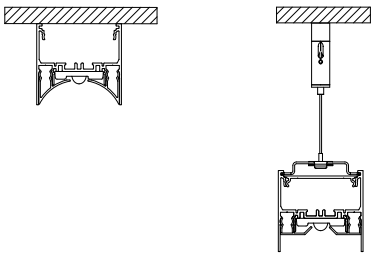



CURVED COVER



SHARP COVER



STRAIGHT COVER

100% CUSTOM MADE

CHOOSE REQUIRED MOUNTING, PROFILE LENGTH, COLOUR OF YOUR CHOICE, PREFERRED DIMMING, ...

PROFILE CONFIGURATOR

CONFIGURE YOUR CONTINUOUS LED PROFILES IN FIVE EASY STEPS WITH THE PROFILE CONFIGURATOR ON **MY.SUPERMODULAR.COM**

NEED MORE INFO OR QUOTATION REQUEST?

CONTACT **PROFILES@SUPERMODULAR.COM**
OR CONSULT PDF VERSION OF CATALOGUE ON WEBSITE

Drupl70

DRUPL 70 / BASE WHITE STRUCTURE /
STRAIGHT COVER WHITE STRUCTURE / ENDPLATE LOW

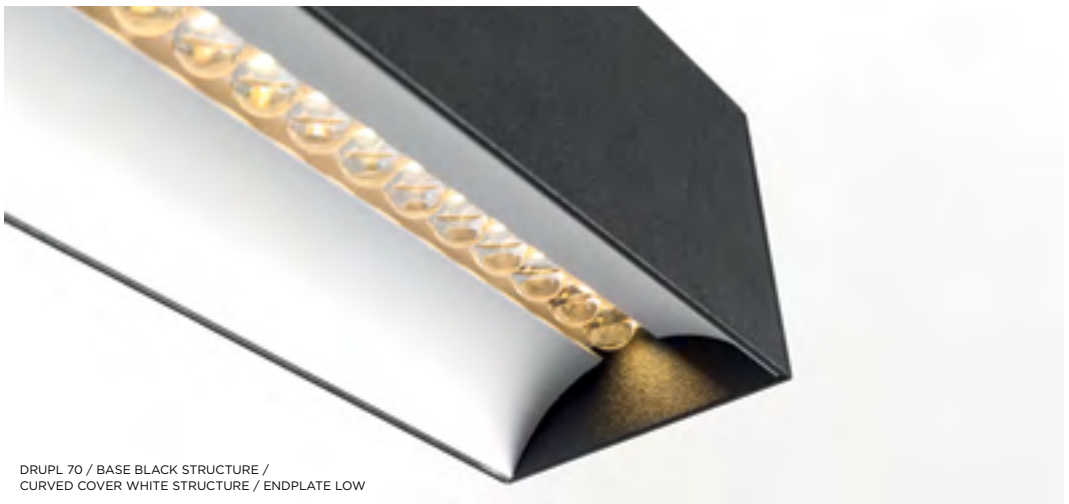

DRUPL 70 / BASE BLACK STRUCTURE /
CURVED COVER WHITE STRUCTURE / ENDPLATE LOW

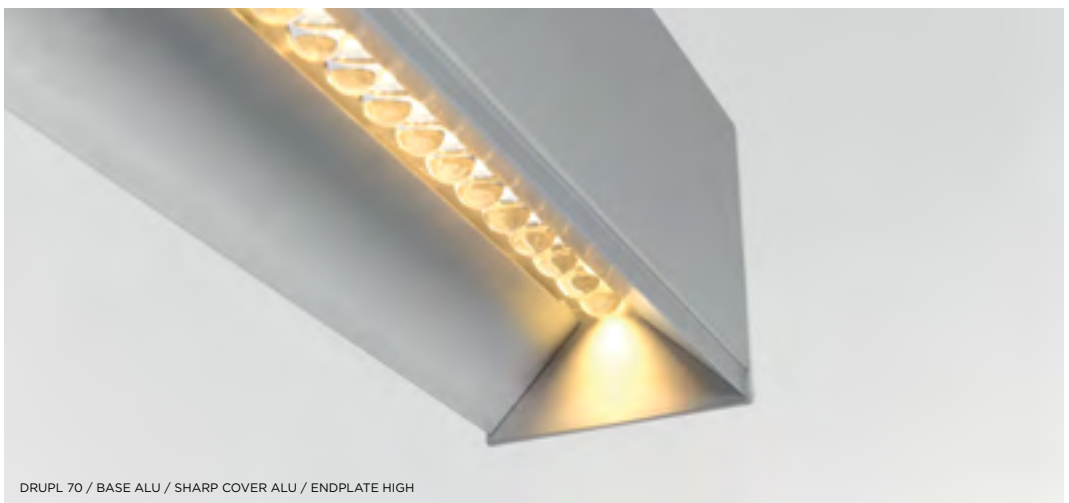

DRUPL 70 / BASE ALU / SHARP COVER ALU / ENDPLATE HIGH

DRUPL 70
HOWEST, KORTRIJK (BE)
ARCHITECT ELS DENAEGHEL

Drupl70

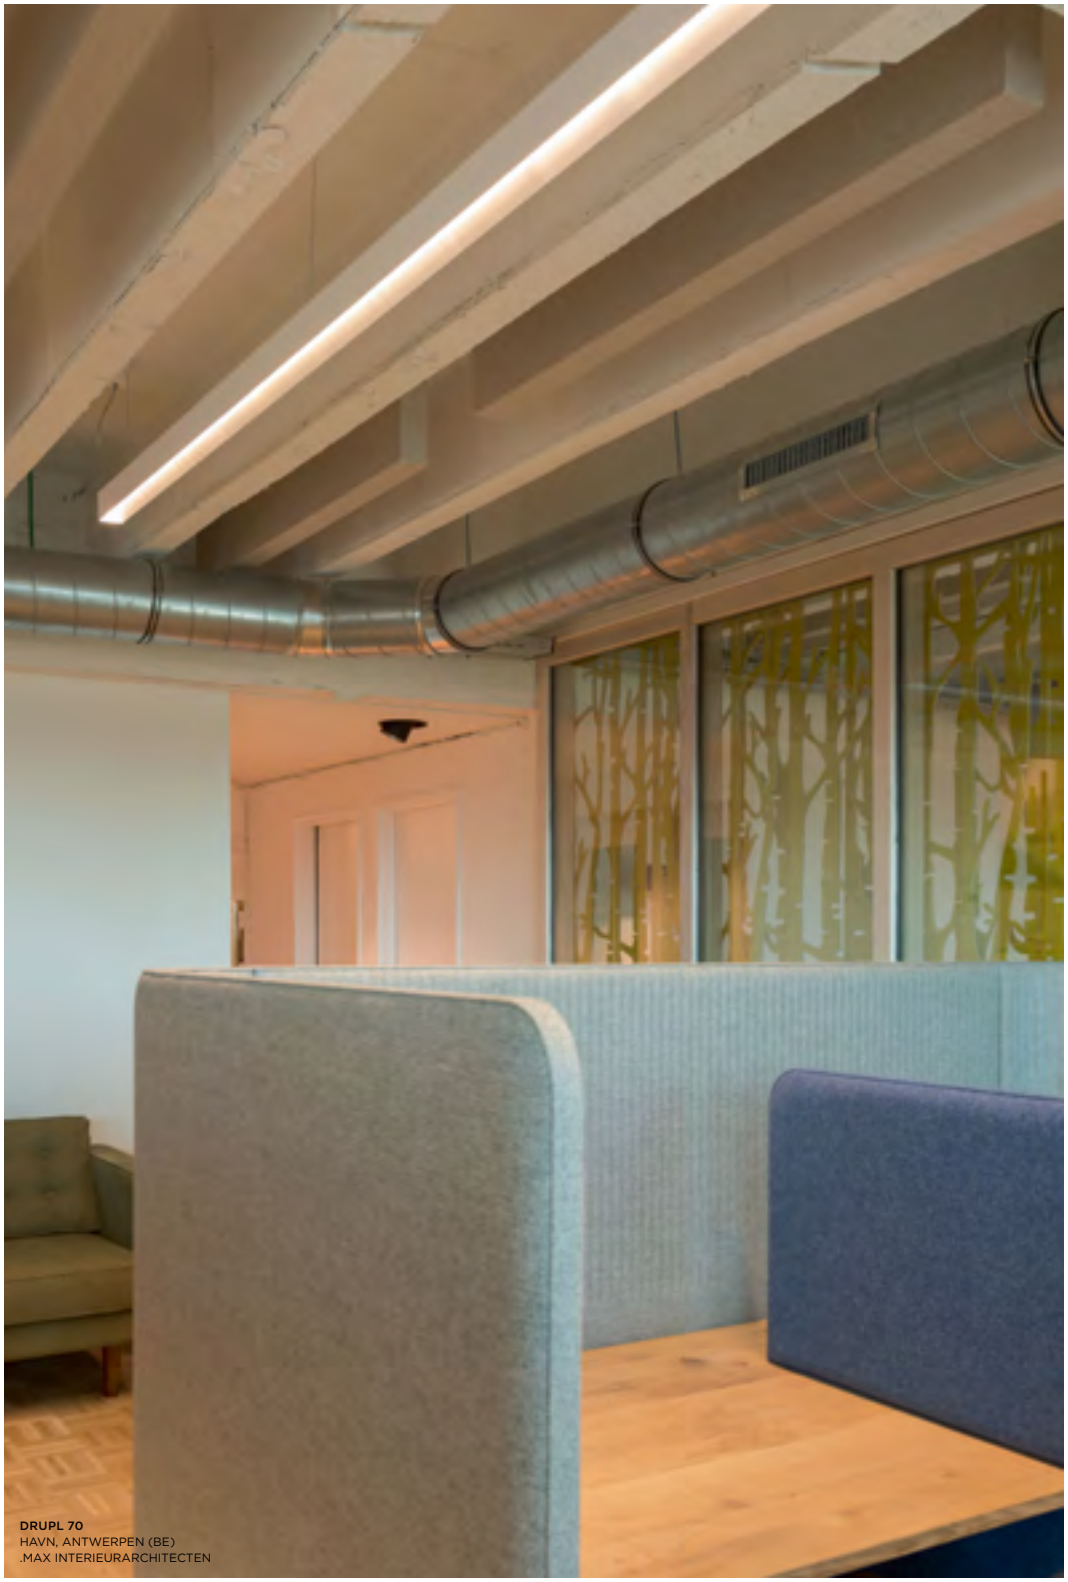

DRUPL 70
HAVN, ANTWERPEN (BE)
.MAX INTERIEURARCHITECTEN

DRUPL 70
HET NIEUWE INSTITUUT, ROTTERDAM (NL)
ARCHITECTEN VAN HNI

Drupl70

DRUPL 70
APOTHEEK, DEERLIJK (BE)
WILLEM BENOIT INTERIEUR

DRUPL 70
APOTHEEK, DEERLIJK (BE)
WILLEM BENOIT INTERIEUR

Drupl70

DRUPL 70
EU-TOP, AMSTERDAM (NL)
EDWARD VAN VLIET

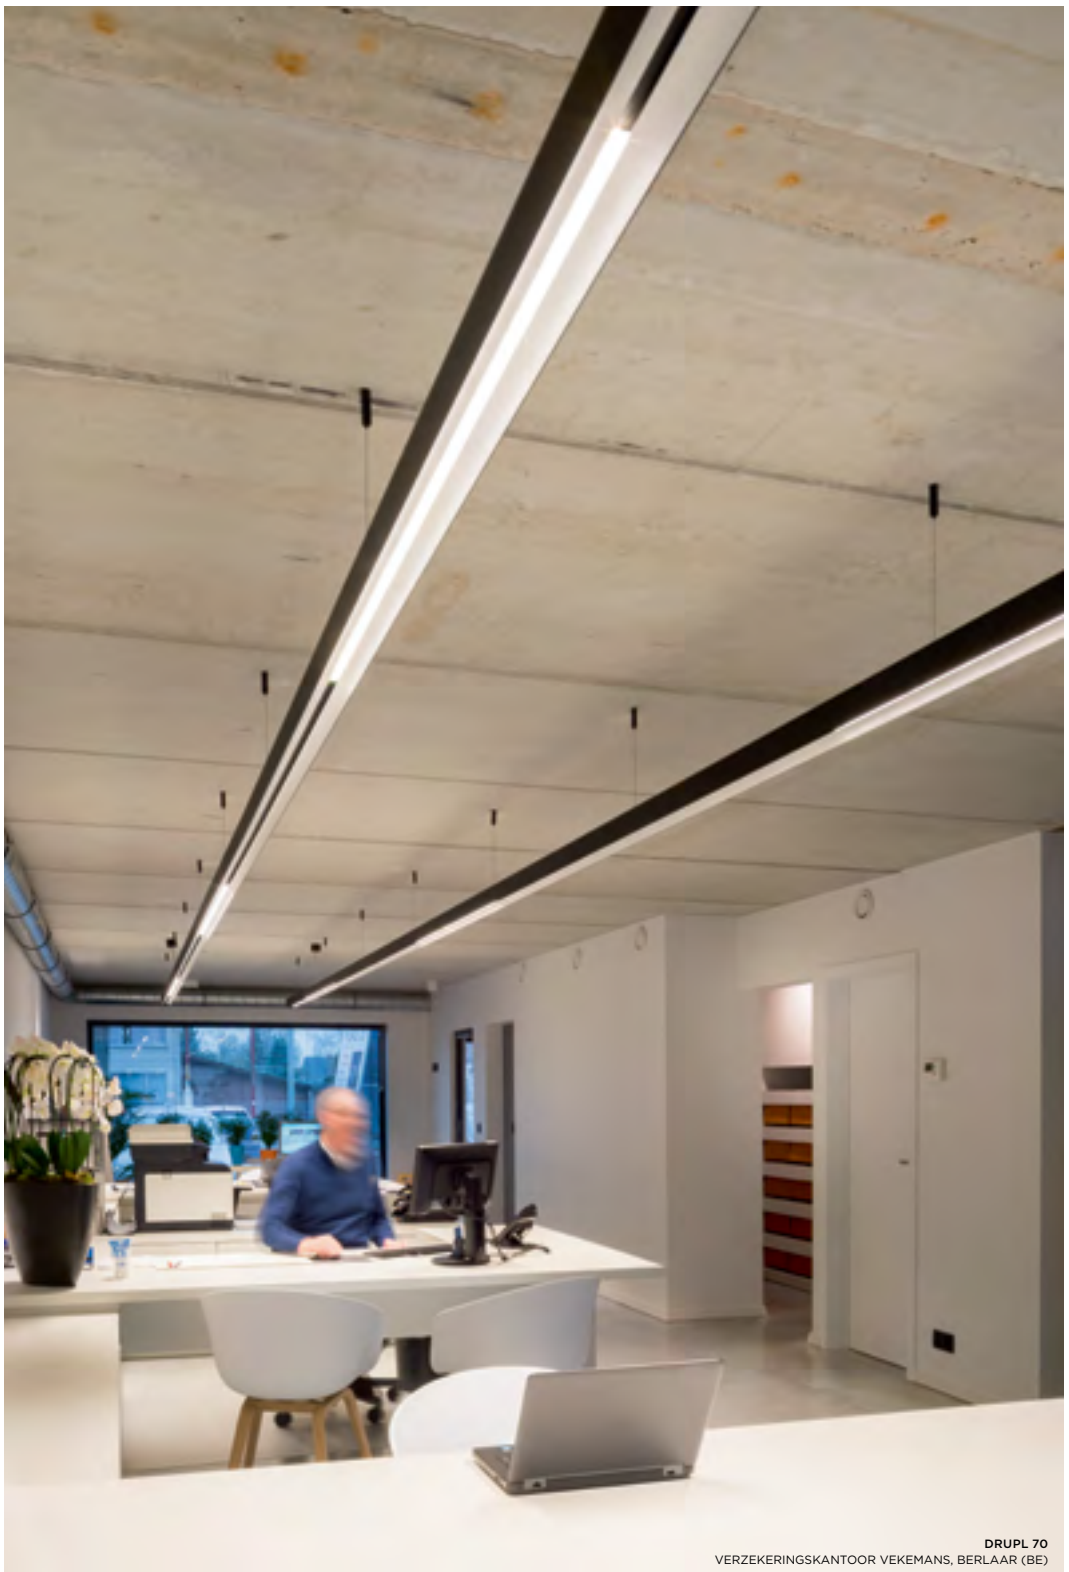

DRUPL 70
VERZEKERINGSKANTOOR VEKEMANS, BERLAAR (BE)

Freeway

FREEWAY
NORWEGIAN EMBASSY, DEN HAAG (NL)
D+Z ARCHITECTEN+PROJECTMANAGERS

You could call this strip light the recessed version of our SL149. Together with SL149, Freeway is therefore the widest profile within the SL family. You can accommodate all kinds of lighting in the extremely flexible Freeway. The lines can also be crossed if required, creating an impressive architectural highway on the ceiling.

SUPERMODULAR.COM/EN/FREEWAY

LINEAR CUSTOM MADE | LIGHTING UNITS

Freeway LED 1100lm	ECO LED
Freeway LED 2000lm	ECO LED
Freeway degree LED	ECO LED
Freeway TL5 HE/HO poly down	ECO FLUORESCENT
Freeway TL5 HE/HO BAP down	ECO FLUORESCENT

LINEAR CUSTOM MADE

MOUNTING

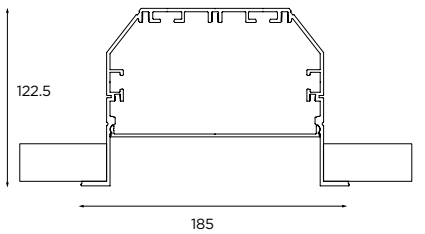

100% CUSTOM MADE

CHOOSE REQUIRED MOUNTING, PROFILE LENGTH, COLOUR OF YOUR CHOICE, PREFERRED DIMMING, ...

NEED MORE INFO OR QUOTATION REQUEST?

CONTACT **PROFILES@SUPERMODULAR.COM**
OR CONSULT PDF VERSION OF CATALOGUE ON WEBSITE

H2A

H2A
AZ SINT-JAN, BRUGGE (BE)
AMELIE HUYBRECHTS

H2A is a daring architeural lighting concept that was initially developed by reputed hospital planners in collaboration with the Modular design team.
H2A's clean, minimalist and individualistic design is perfectly complemented by the required technological characteristics which light must comply with in modern healthcare.

SUPERMODULAR.COM/EN/H2A

LINEAR CUSTOM MADE | LIGHTING UNITS

H2A Fortimo LED-strip poly down2000lm/m	ECO LED
H2A Fortimo LED Line 3850lm/m up	ECO LED
H2A Fortimo LED Line High Flux 6750lm/m up	ECO LED
H2A Asy Fortimo LED Line High Flux 6750lm/m up	ECO LED
H2A LED high power unit	ECO LED

H2A TL5 HE/HO continuous line up	ECO FLUORESCENT
H2A TL5 HE/HO poly down	ECO FLUORESCENT
H2A TL5 HE/HO up	ECO FLUORESCENT
H2A TL5 HE/HO up asym. reflector	ECO FLUORESCENT

LINEAR CUSTOM MADE

MOUNTING



100% CUSTOM MADE

CHOOSE REQUIRED MOUNTING, PROFILE LENGTH, COLOUR OF YOUR CHOICE, PREFERRED DIMMING, ...

NEED MORE INFO OR QUOTATION REQUEST?

CONTACT **PROFILES@SUPERMODULAR.COM**
OR CONSULT PDF VERSION OF CATALOGUE ON WEBSITE

H55

H55: a simple profile that can cast its light either upwards or downwards, and is available either as a pendant or wall-mounted. In addition to the linear tailored solution, H55 is also offered as a ready-made solution in order to meet the rising demand for versatile architectural LED lighting lines.

SUPERMODULAR.COM/EN/H55

LINEAR CUSTOM MADE | LIGHTING UNITS

H55 Fortimo LED Line 3850lm/m GI - down	ECO LED
H55 LED-strip 24V GE - up	ECO LED

LINEAR CUSTOM MADE

MOUNTING





100% CUSTOM MADE

CHOOSE REQUIRED MOUNTING, PROFILE LENGTH, COLOUR OF YOUR CHOICE, PREFERRED DIMMING, ...

PROFILE CONFIGURATOR

CONFIGURE YOUR CONTINUOUS LED PROFILES IN FIVE EASY STEPS WITH THE PROFILE CONFIGURATOR ON **MY.SUPERMODULAR.COM**

NEED MORE INFO OR QUOTATION REQUEST?

CONTACT **PROFILES@SUPERMODULAR.COM**
OR CONSULT PDF VERSION OF CATALOGUE ON WEBSITE

H55

H55
OPTI-Q, MENEN (BE)
FIVE AM

H55
TANDARTSEN ELST (NL)
JEROEN VAN DIJK BNI

H55

H55
CITIBANK, HELSINKI
DESIGN OFFICE KOKO 3 LTD

H55
KORTRIJK (BE)

Halfpipe

Why should lighting profiles always be rectangular? Halfpipe follows the path less travelled and is a semi-round profile which can accommodate all kinds of lighting modules. The most attractive solutions are matching round shapes such as round spotlights, a Bolster or a diffused light shaft.

SUPERMODULAR.COM/EN/HALFPIPE

LINEAR CUSTOM MADE | LIGHTING UNITS

Halfpipe TL5 HE/HO fuse down — ECO FLUORESCENT

Halfpipe TL5 HE/HO fuse 1/2 out down — ECO FLUORESCENT

Halfpipe CDMR-111 Bolster — ECO DISCHARGE

LINEAR CUSTOM MADE

MOUNTING

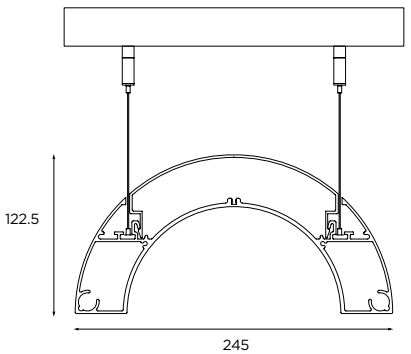

100% CUSTOM MADE

CHOOSE REQUIRED MOUNTING, PROFILE LENGTH, COLOUR OF YOUR CHOICE, PREFERRED DIMMING, ...

NEED MORE INFO OR QUOTATION REQUEST?

CONTACT **PROFILES@SUPERMODULAR.COM**
OR CONSULT PDF VERSION OF CATALOGUE ON WEBSITE

MO6

Just like Moses parted the sea, our MO6 fitting (figuratively) splits the ceiling in two in order to create a sleek architectural effect with a minimum of work. The universal lighting profile combines various appealing design aspects: a wide base plate, an asymmetrical groove, gently rounded corners, directional lamp rings and contrasting colours. MO6 is custom made and every profile is unique.

design in cooperation with couvreur-devos

SUPERMODULAR.COM/EN/MO6

LINEAR CUSTOM MADE | LIGHTING UNITS

MO6 LED — ECO LED

MO6 TL5 HE/HO poly down — ECO FLUORESCENT

MO6 MR16 — HALOGEN 12V

MO6 AR111 — HALOGEN 12V

LINEAR CUSTOM MADE

MOUNTING

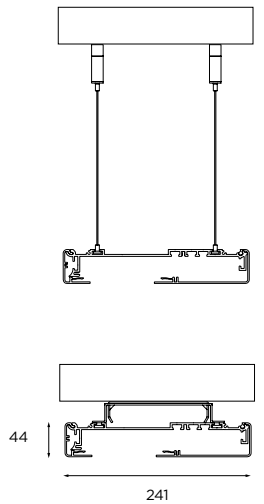

100% CUSTOM MADE

CHOOSE REQUIRED MOUNTING, PROFILE LENGTH, COLOUR OF YOUR CHOICE, PREFERRED DIMMING, ...

NEED MORE INFO OR QUOTATION REQUEST?

CONTACT **PROFILES@SUPERMODULAR.COM**
OR CONSULT PDF VERSION OF CATALOGUE ON WEBSITE

MO6

MO6
PATISSERIE RECOUVREUR, HOUDEMONT (FR) JEAN LUC HEMMER ARCHITECTE

MO6
TEGRO & KREA, MECHELEN (BE)
TEGRO & KREA ARCHITECTEN

MP78

MP78 makes the most of the design options offered by LEDs and is one of the thinnest profiles on the market. In combination with LED lines, LED spotlights or the new directional LED spotlight Rektor, the MP78 is your ideal ally for any project in which you wish to provide both basic and accent lighting with a single fixture.

SUPERMODULAR.COM/EN/MP78

LINEAR CUSTOM MADE | LIGHTING UNITS

MP78 LED	ECO LED
MP78 Rektor LED down	ECO LED
MP78 Fortimo LED Line 3850lm/m	ECO LED

MP78 WITH LED-LINE

MP78 WITH REKTOR

100% CUSTOM MADE

CHOOSE REQUIRED MOUNTING, PROFILE LENGTH, COLOUR OF YOUR CHOICE, PREFERRED DIMMING, ...

NEED MORE INFO OR QUOTATION REQUEST?

CONTACT **PROFILES@SUPERMODULAR.COM**
OR CONSULT PDF VERSION OF CATALOGUE ON WEBSITE

LINEAR CUSTOM MADE

MOUNTING

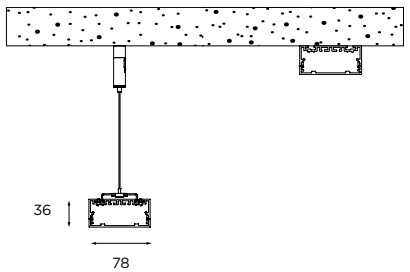

MP78

MP78
PRIVATE RESIDENCE (NL)
X+L

MP78
MANUFACTUUR, MERELBEKE (NL)
GROUP O ARCHICTECTEN

MP78

MP78
HAVN, ANTWERPEN (BE)
.MAX INTERIEURARCHITECTEN

MP78
INGENIUM, BRUGGE (BE)
ARCHITECTEN GROEP III

SLD50

Our popular SLD family of LED profiles just got bigger, welcoming the SLD50: an extremely thin (50 mm wide) profile that integrates Modular's brand-new Eyeball – a small yet highly powerful, adjustable spot that is 360° rotable and 30° adjustable in both directions.

Its sleek design makes SLD50 a perfect solution for office lighting, as well as for private homes and hospitality environments. It also displays CCT and CRI consistency across the different LED technologies (downlight, uplight and spotlight).

SUPERMODULAR.COM/EN/SLD50

LINEAR CUSTOM MADE | LIGHTING UNITS

SLD50 Fortimo LED Line	ECO LED
SLD50 Fortimo LED Line preset at 75% light output	ECO LED
SLD50 Fortimo LED Line preset at 50% light output	ECO LED
SLD50 Fortimo LED Line GI + lens 50°	ECO LED
SLD50 Eyeball LED GE	ECO LED
SLD50 LED-strip /m mounted uplight	ECO LED

LINEAR CUSTOM MADE

MOUNTING

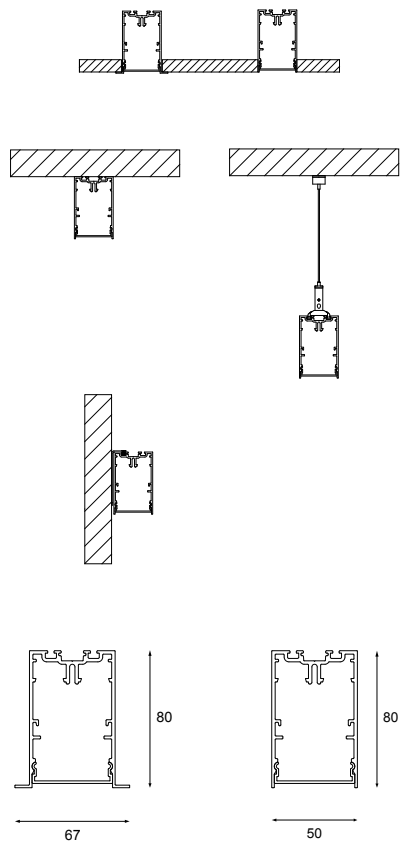

100% CUSTOM MADE

CHOOSE REQUIRED MOUNTING, PROFILE LENGTH, COLOUR OF YOUR CHOICE, PREFERRED DIMMING, ...

PROFILE CONFIGURATOR

CONFIGURE YOUR CONTINUOUS LED PROFILES IN FIVE EASY STEPS WITH THE PROFILE CONFIGURATOR ON **MY.SUPERMODULAR.COM**

NEED MORE INFO OR QUOTATION REQUEST?

CONTACT **PROFILES@SUPERMODULAR.COM**
OR CONSULT PDF VERSION OF CATALOGUE ON WEBSITE

SLD50 WITH EYEBALL

SLD50 WALL MOUNTED

SLD50 SUSPENDED

SLD50 POLY OUT SURFACE

SLD50

SLD50 POLY OUT

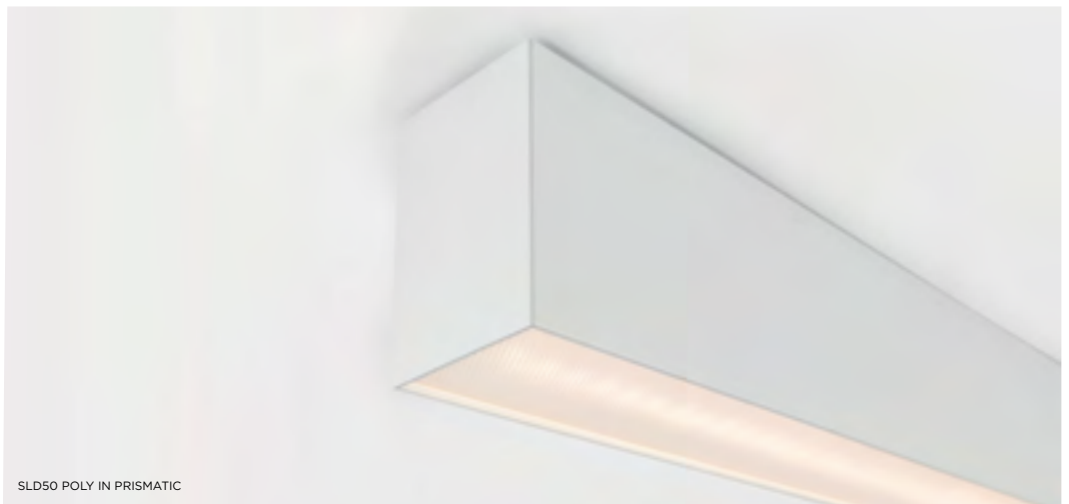

SLD50 POLY IN PRISMATIC

SLD50 RECESSED

SLD50
POLE CULTUREL, BAUD (FR)
STUDIO 02

SLD50
KORTRIJK (BE)

SLD50

SLD50
TOUR INCITY / CAISSE D'EPARGNE RHONE ALPES, LYON (FR)
DOP ARCHITECTURE

SLD50
PRIVATGYMNASIUM, SCHWETZINGEN (DE)
BERND KIRCHBRÜCHER, RAUMLINQ GMBH

SLD50, LOTIS TUBED
MEDIATHEQUE, MONTERBLANC (FR)
STUDIO 02

SLD75

A LED dedicated version of our famous SL75 lighting cove, SLD75 is a completely customizable solution, guaranteeing the perfect size for your setting. With a low UGR, the LED module, combined with different lenses – prismatic polycarbonate diffuser or PMMA diffuser –, brings you the ideal solution for office lighting. SLD75 fitted with standard poly lenses is perfect for general lighting and even comes as standard with pre-set dimming to provide the right amount of light in the right place.

SUPERMODULAR.COM/EN/SLD75

LINEAR CUSTOM MADE | LIGHTING UNITS

SLD75 Fortimo LED Line 3850lm/m	ECO LED
SLD75 Fortimo LED Line 2900lm/m	ECO LED
SLD75 Fortimo LED Line 1925lm/m	ECO LED
SLD75 Fortimo LED Line 3850lm/m GI + lens 50°	ECO LED
SLD75 Fortimo LED Line 3850lm/m GI + lens 80°	ECO LED
SLD75 office compliant Fortimo LED Line GI + lens 50°	ECO LED
SLD75 office compliant Fortimo LED Line GI + lens 80°	ECO LED
SLD75 LED-strip 24V GE - up	ECO LED

LINEAR CUSTOM MADE

MOUNTING

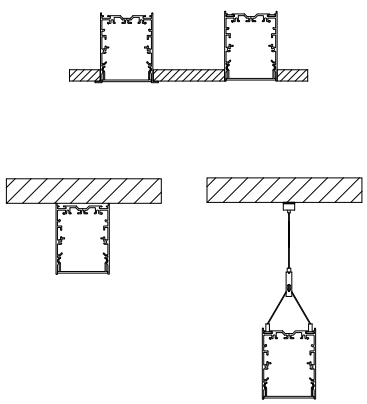





100% CUSTOM MADE

CHOOSE REQUIRED MOUNTING, PROFILE LENGTH, COLOUR OF YOUR CHOICE, PREFERRED DIMMING, ...

PROFILE CONFIGURATOR

CONFIGURE YOUR CONTINUOUS LED PROFILES IN FIVE EASY STEPS WITH THE PROFILE CONFIGURATOR ON **MY.SUPERMODULAR.COM**

NEED MORE INFO OR QUOTATION REQUEST?

CONTACT **PROFILES@SUPERMODULAR.COM**
OR CONSULT PDF VERSION OF CATALOGUE ON WEBSITE

SLD75

SLD75
JONSVOLLKVARTALET, SPAREBANKEN VEST, BERGEN (NO)

SLD75
PHILIPS, HAMBURG (DE)
SBP DESIGN - KIM MARC BOBSIN

SLD75

SLD75
LE METTIS, METZ (FR)
DENU ET PARADON

SLD75
CINEMA, STENAY (FR)
CHRISTOPHE PRESLE

SLD75
SALLE POLYVALENTE, PLUMERGAT (FR)
STUDIO 02

SL75

The ultimate functional lighting tool with superior efficiency and light output results. SL75 includes 'ready-made' (see ceiling section) as well as 'custom made' solutions which guarantees you the exact sizes to fit into your setting. Can be mounted recessed, surface or suspended. In recessed applications, the light experience predominates the fixtures.

SUPERMODULAR.COM/EN/SL75

LINEAR CUSTOM MADE | LIGHTING UNITS

SL75 TL5 HE/HO continuous line down	ECO FLUORESCENT
SL75 TL5 HE/HO BAP continuous	ECO FLUORESCENT

LINEAR CUSTOM MADE

MOUNTING

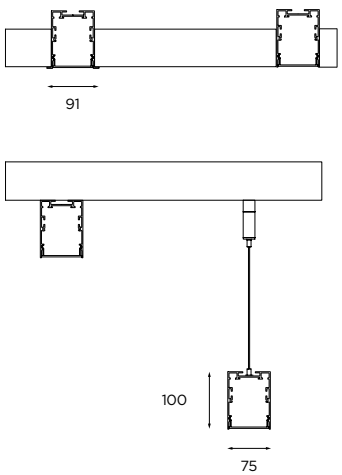

100% CUSTOM MADE

CHOOSE REQUIRED MOUNTING, PROFILE LENGTH, COLOUR OF YOUR CHOICE, PREFERRED DIMMING, ...

NEED MORE INFO OR QUOTATION REQUEST?

CONTACT **PROFILES@SUPERMODULAR.COM**
OR CONSULT PDF VERSION OF CATALOGUE ON WEBSITE

SL100

Light lines perfectly blend with the environment and generate a leverage of the architecture. SL100 can be mounted fully recessed, semi-recessed, surface or suspended. With a large offering of lighting units, SL100 can be used as accent or general lighting and this in commercial as well as residential settings. Can also be combined with a continuous BAP, an efficient anti-glare grid which is mainly used in the office sector. For the diffuser, you can choose between polycarbonate or the more efficient PMMA.

SUPERMODULAR.COM/EN/SL100

LINEAR CUSTOM MADE | LIGHTING UNITS

SL100 Fortimo LED Line 3850lm/m	ECO LED
SL100 Smart cake 82 LED	ECO LED
SL100 Smart kup 82 LED	ECO LED
SL100 Smart lotis 82 LED	ECO LED
SL100 degree LED	ECO LED

SL100 TL5 HE/HO continuous line down	ECO FLUORESCENT
SL100 TL5 HE/HO BAP continuous	ECO FLUORESCENT
SL100 TL5 HE/HO poly down	ECO FLUORESCENT
SL100 TL5 HE/HO BAP down	ECO FLUORESCENT

LINEAR CUSTOM MADE

MOUNTING

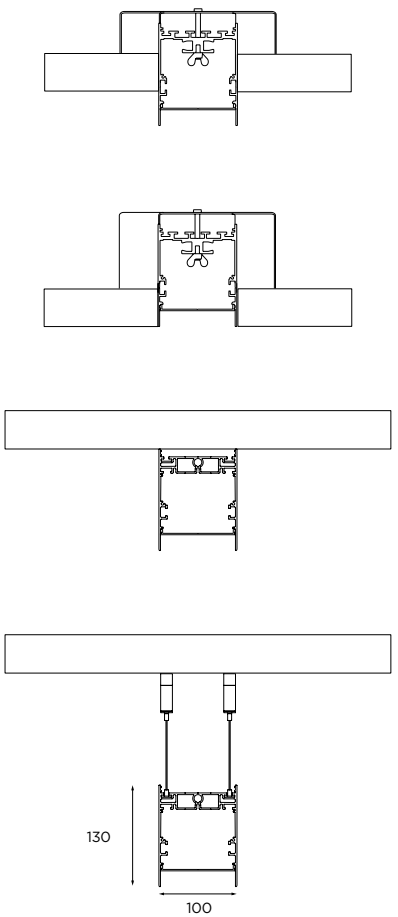

100% CUSTOM MADE

CHOOSE REQUIRED MOUNTING, PROFILE LENGTH, COLOUR OF YOUR CHOICE, PREFERRED DIMMING, ...

NEED MORE INFO OR QUOTATION REQUEST?

CONTACT **PROFILES@SUPERMODULAR.COM**
OR CONSULT PDF VERSION OF CATALOGUE ON WEBSITE

SL100
COAATIEMU HQ, MURCIA (ES)
L+A ARQUITECTOS / FRANCISCO CASCALES LD

SL149

SL149
RR DESIGN, KNOKKE (BE)
ANN GRYP

At 149 mm, SL149 is our widest profile from the SL range. The numerous lighting units which are available make it possible to integrate directional spotlights in the housing as well as continuous light lines. SL149 can be fully recessed, semi-recessed, surface mounted or suspended. For the cover you can opt for standard or superior, for the diffuser you can choose between polycarbonate or the more efficient PMMA.

SUPERMODULAR.COM/EN/SL149

LINEAR CUSTOM MADE | LIGHTING UNITS

SL140 LED 1100lm	ECO LED
SL140 LED 1200lm	ECO LED
SL149 degree LED	ECO LED
SL149 unit for M-LED 111	ECO LED
SL149 TL5 HE/HO continuous line down	ECO FLUORESCENT
SL149 TL5 HE/HO poly down	ECO FLUORESCENT
SL149 TL5 HE/HO BAP down	ECO FLUORESCENT

LINEAR CUSTOM MADE

MOUNTING

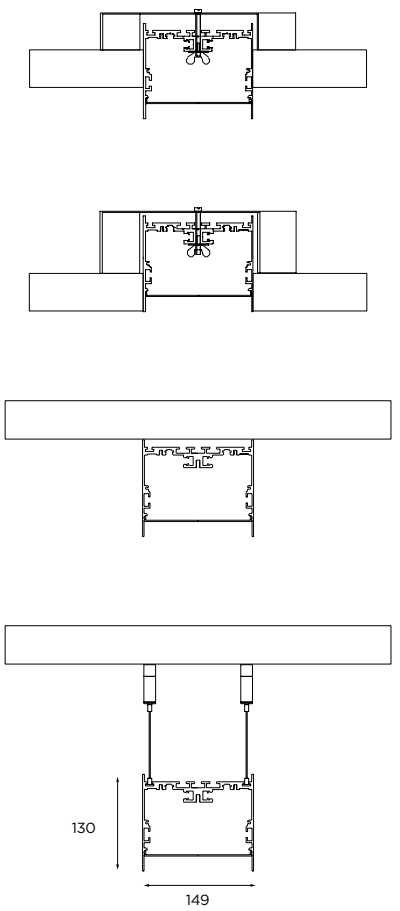

100% CUSTOM MADE

CHOOSE REQUIRED MOUNTING, PROFILE LENGTH, COLOUR OF YOUR CHOICE, PREFERRED DIMMING, ...

NEED MORE INFO OR QUOTATION REQUEST?

CONTACT **PROFILES@SUPERMODULAR.COM**
OR CONSULT PDF VERSION OF CATALOGUE ON WEBSITE

SL149

SL149
POLE CULTUREL, BAUD (FR)
STUDIO 02

SL149
BVN OFFICE, SYDNEY (AU)
BVN ARCHITECTURE

SL micro

Light lines make fantastic architectural features. Our SL family offers a wide variety of widths of which SL micro is the second narrowest. Available in ceiling-mounted, suspended and recessed versions. An IP44 version allows you to extend your light lines into the outdoor space or the bathroom.

SUPERMODULAR.COM/EN/SL-MICRO

LINEAR CUSTOM MADE | LIGHTING UNITS

SL micro Fortimo LED-strip 2000lm/m	ECO LED
SL micro LED-strip /m mounted	ECO LED

LINEAR CUSTOM MADE

MOUNTING

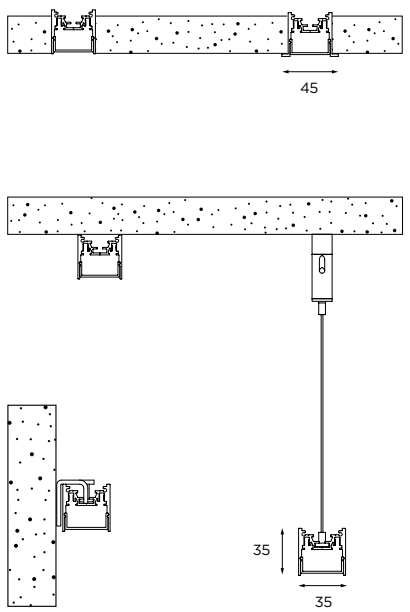

100% CUSTOM MADE

CHOOSE REQUIRED MOUNTING, PROFILE LENGTH, COLOUR OF YOUR CHOICE, PREFERRED DIMMING, ...

PROFILE CONFIGURATOR

CONFIGURE YOUR CONTINUOUS LED PROFILES IN FIVE EASY STEPS WITH THE PROFILE CONFIGURATOR ON **MY.SUPERMODULAR.COM**

NEED MORE INFO OR QUOTATION REQUEST?

CONTACT **PROFILES@SUPERMODULAR.COM**
OR CONSULT PDF VERSION OF CATALOGUE ON WEBSITE

SL micro

SL MICRO
SIGNAL IDUNA, KARLSRUHE (DE)
SASSAN PHILIPP HASCHEMI & ASSOCIATES

SL MICRO
SIGNAL IDUNA, KARLSRUHE (DE)
SASSAN PHILIPP HASCHEMI & ASSOCIATES

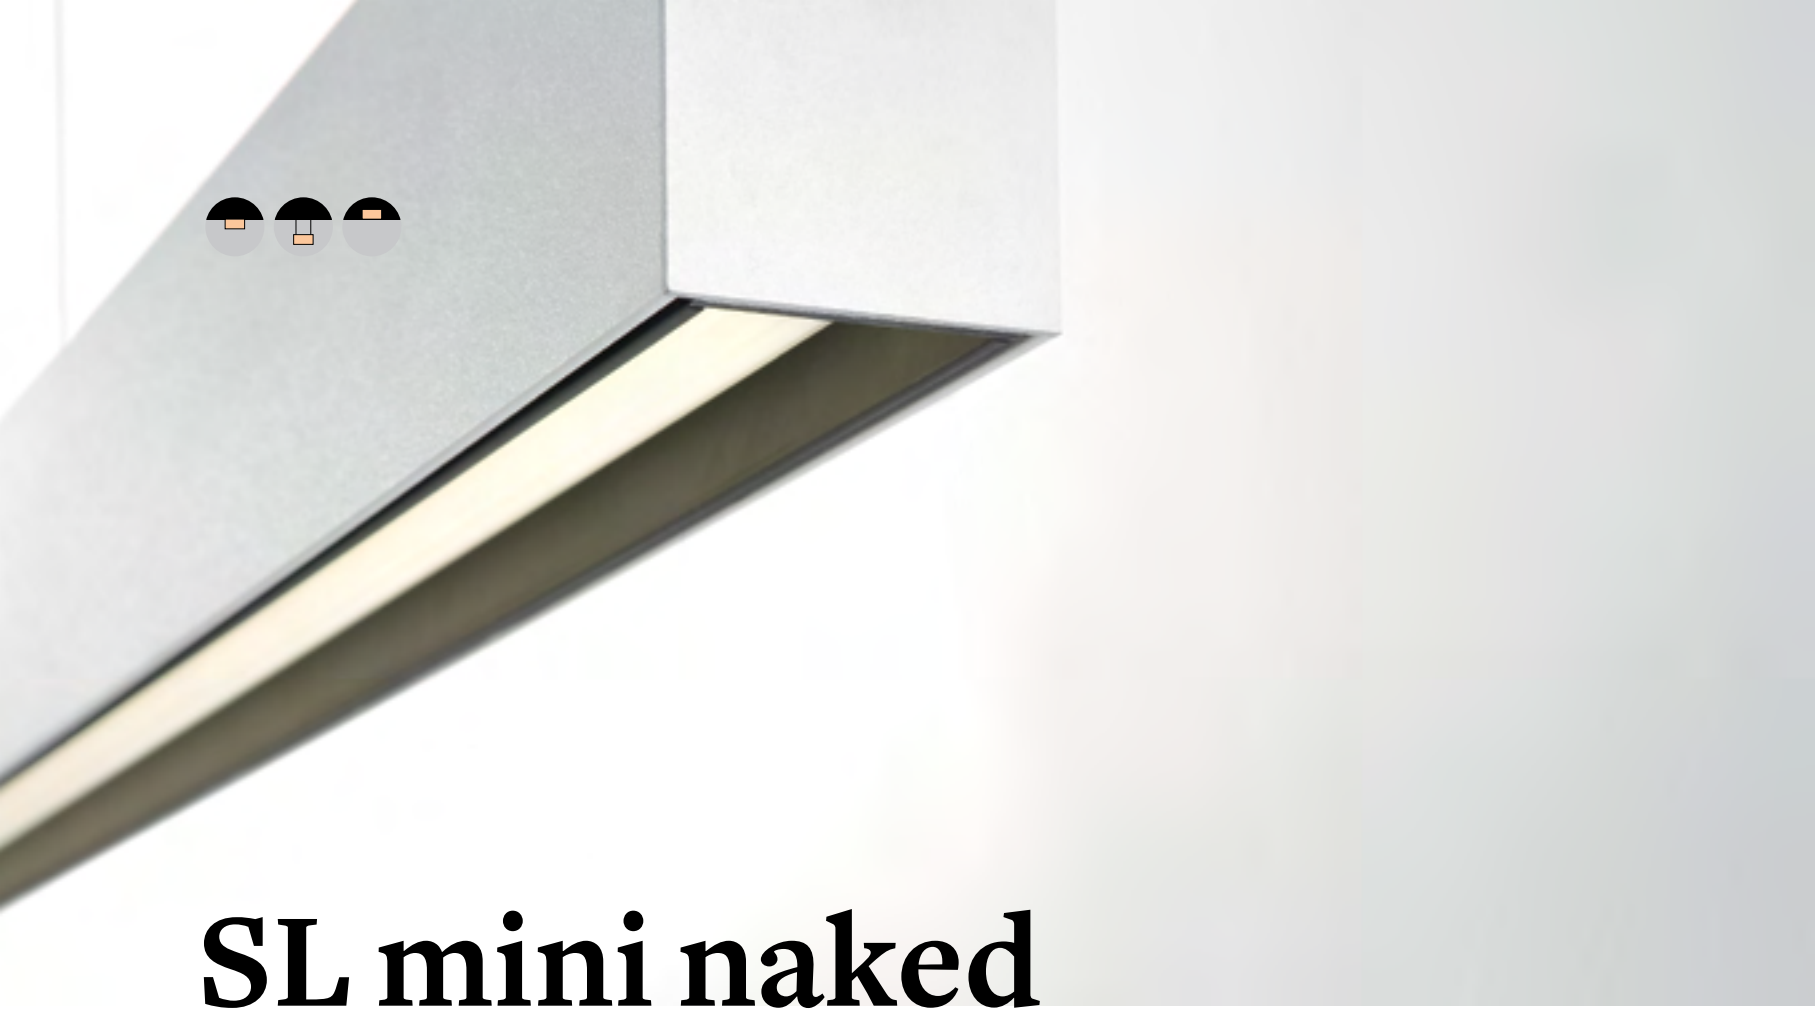

SL mini naked

SL mini naked differs from the rest of the SL mini family. The name says it all. The light sources, SLS lamp and/or LED spotlights are visible in a colored U-shaped inner casing. SL mini naked is well appreciated for its sleekness, its elegance in the space. Be creative with colors, lengths, light sources and positioning. SL mini naked is available in fixed lengths or by customization.

SUPERMODULAR.COM/EN/SL-MINI-NAKED

LINEAR CUSTOM MADE | LIGHTING UNITS

SL mini naked LED high power unit — ECO LED

SL mini naked TL5 SLS naked down — ECO FLUORESCENT

LINEAR CUSTOM MADE

MOUNTING

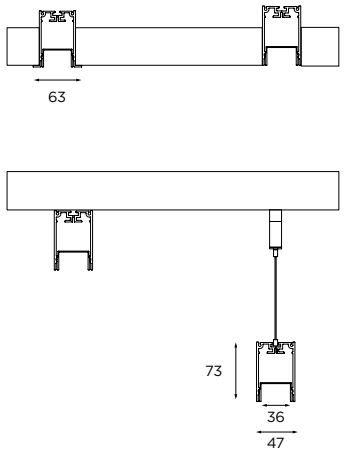

100% CUSTOM MADE

CHOOSE REQUIRED MOUNTING, PROFILE LENGTH, COLOUR OF YOUR CHOICE, PREFERRED DIMMING, ...

NEED MORE INFO OR QUOTATION REQUEST?

CONTACT **PROFILES@SUPERMODULAR.COM**
OR CONSULT PDF VERSION OF CATALOGUE ON WEBSITE

SL mini naked

SL MINI NAKED
URBAN LODGE HOTEL, AMSTERDAM (NL)
HILARY LANCASTER

SL MINI NAKED
PRIVATE RESIDENCE, ROTTERDAM (NL)
LINDA LAGRAND INTERIOR DESIGN

SL mini poly in

SL mini is the perfect lighting solution to be creative in the architecture. Create angles, place them playful in the room or draw a straight line of light. SL mini poly in has different mounting possibilities and comes with fluorescent lighting units.

SUPERMODULAR.COM/EN/SL-MINI-POLY-IN

LINEAR CUSTOM MADE | LIGHTING UNITS

SL mini poly in TL5 HE/HO continuous line down	ECO FLUORESCENT
SL mini poly in TL5 SLS continuous line down	ECO FLUORESCENT

LINEAR CUSTOM MADE

MOUNTING

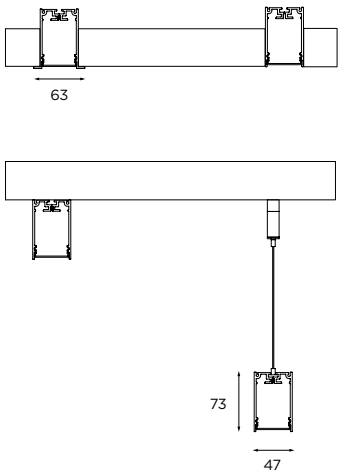

100% CUSTOM MADE

CHOOSE REQUIRED MOUNTING, PROFILE LENGTH, COLOUR OF YOUR CHOICE, PREFERRED DIMMING, ...

NEED MORE INFO OR QUOTATION REQUEST?

CONTACT **PROFILES@SUPERMODULAR.COM**
OR CONSULT PDF VERSION OF CATALOGUE ON WEBSITE

SL mini poly in

SL MINI POLY IN
KONINKLIJKE HOCKEY CLUB, LEUVEN (BE)
ARCHITEAM

SL MINI POLY IN
NISSAN, ROTTERDAM (NL)

SL mini poly out

The subtle border of the poly connecting with the U-shaped housing generates light output not only downwards but also on both sides. The light is very subtle thanks to the side poly. SL mini poly out is available with fluorescent lighting units.

SUPERMODULAR.COM/EN/SL-MINI-POLY-OUT

LINEAR CUSTOM MADE | LIGHTING UNITS

SL mini poly out TL5 HE/HO continuous line down	ECO FLUORESCENT
SL mini poly out TL5 SLS continuous line down	ECO FLUORESCENT

LINEAR CUSTOM MADE

MOUNTING

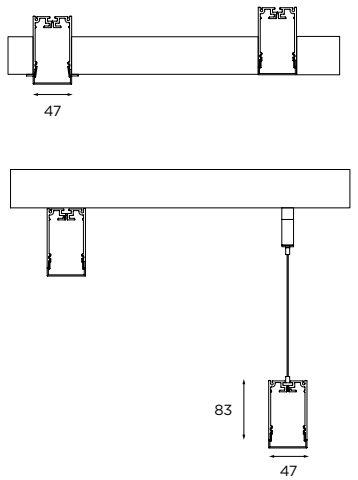

100% CUSTOM MADE

CHOOSE REQUIRED MOUNTING, PROFILE LENGTH, COLOUR OF YOUR CHOICE, PREFERRED DIMMING, ...

NEED MORE INFO OR QUOTATION REQUEST?

CONTACT **PROFILES@SUPERMODULAR.COM**
OR CONSULT PDF VERSION OF CATALOGUE ON WEBSITE

SL nano poly out

Light lines make fantastic architectural features. At just 26.5 mm wide, SL nano is our narrowest U-profile. SL nano poly out, available with a PMMA diffuser on the outside, nonetheless guarantees a light-filling effect in any room. Only available with LEDs. Suitable for surface mounting on the wall or ceiling; also works well as a suspended fitting.

SUPERMODULAR.COM/EN/SL-NANO-POLY-OUT

LINEAR CUSTOM MADE | LIGHTING UNITS

SL nano poly out LED-strip /m mounted ECO LED

LINEAR CUSTOM MADE

MOUNTING



100% CUSTOM MADE

CHOOSE REQUIRED MOUNTING, PROFILE LENGTH, COLOUR OF YOUR CHOICE, PREFERRED DIMMING, ...

PROFILE CONFIGURATOR

CONFIGURE YOUR CONTINUOUS LED PROFILES IN FIVE EASY STEPS WITH THE PROFILE CONFIGURATOR ON **MY.SUPERMODULAR.COM**

NEED MORE INFO OR QUOTATION REQUEST?

CONTACT **PROFILES@SUPERMODULAR.COM**
OR CONSULT PDF VERSION OF CATALOGUE ON WEBSITE

SL NANO POLY OUT
GEYER, PERTH (AU)

SL NANO POLY OUT
PRIVATE RSIDENCE (FR)

2Flat2C

2FLAT2C
BNP PARIBAS, AMSTERDAM (NL)
MARTIJN VELDMAN

With a height of just 34.5 mm, (small) 2Flat2C really lives up to its name. Nonetheless, this suspended, sleek profile is extremely versatile: the design allows you to combine functional and accent lighting. For example, you can integrate (directional) spotlights into the fitting or opt for fluorescent lights and a diffuser. It is also an elegant solution to bring extra cabling into a room without drilling holes in the ceiling.

SUPERMODULAR.COM/EN/2FLAT2C

LINEAR CUSTOM MADE | LIGHTING UNITS

2Flat2C Smart cake 82 LED	ECO LED
2Flat2C Smart kup 82 LED	ECO LED
2Flat2C Smart lotis 82 LED	ECO LED
2Flat2C degree LED	ECO LED
2Flat2C unit for M-LED 111	ECO LED

2Flat2C TL5 HE/HO poly down	ECO FLUORESCENT
2Flat2C TL5 HE/HO poly up/down	ECO FLUORESCENT
2Flat2C TL5 HE/HO BAP down	ECO FLUORESCENT
2Flat2C TL5 HE/HO BAP up/down	ECO FLUORESCENT
2Flat2C TL5 HE/HO uplight	ECO FLUORESCENT

LINEAR CUSTOM MADE

2Flat2C | MOUNTING

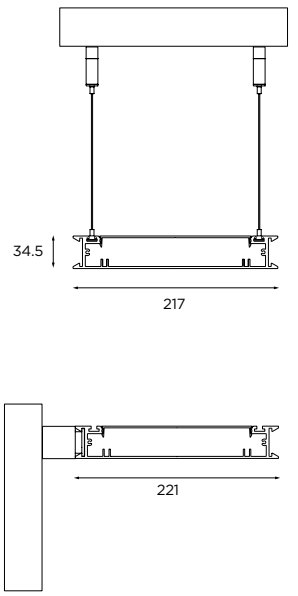

small 2Flat2C Smart cake 82 LED	ECO LED
small 2Flat2C Smart kup 82 LED	ECO LED
small 2Flat2C Smart lotis 82 LED	ECO LED
small 2Flat2C degree LED	ECO LED

small 2Flat2C TL5 HE/HO poly down	ECO FLUORESCENT
small 2Flat2C TL5 HE/HO poly up/down	ECO FLUORESCENT
small 2Flat2C TL5 HE/HO BAP down	ECO FLUORESCENT
small 2Flat2C TL5 HE/HO BAP up/down	ECO FLUORESCENT
small 2Flat2C TL5 HE/HO uplight	ECO FLUORESCENT

small 2Flat2C | MOUNTING

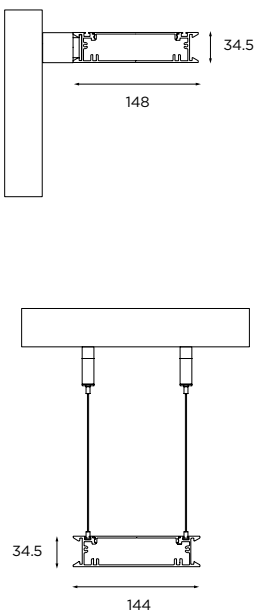

100% CUSTOM MADE

CHOOSE REQUIRED MOUNTING, PROFILE LENGTH, COLOUR OF YOUR CHOICE, PREFERRED DIMMING, ...

NEED MORE INFO OR QUOTATION REQUEST?

CONTACT **PROFILES@SUPERMODULAR.COM**
OR CONSULT PDF VERSION OF CATALOGUE ON WEBSITE

2FLAT2C
EU-TOP, AMSTERDAM (NL)
EDWARD VAN VLIET

small 2Flat2C

SMALL 2FLAT2C
SANCHES MULITERNO ABOGADOS, ALBACETE (ES)
PERGA & FRANCISCO CASCALES LIGHTING DESIGN

GOODIES

ELECTRICAL
DRIVER MATRIX 618 – 633
BACK UP UNIT 634
WIRING DIAGRAMS 635 – 637

CONNECTED
PRODUCT SPECIFICATIONS 638 – 639

INSTALLATION
CONBOX / GYPKIT / RECESSED FRAME (RING) 640 – 643
TRACKS 644 – 645

INSTALL TIPS 646 – 659

INDEX
PRODUCT NAME 660 – 661
ARTICLE NUMBER 662 – 668

MY MODULAR 670
CREDITS 671
AROUND THE WORLD 673

ELECTRICAL | DRIVER MATRIX

constant current - not dimmable (number of products allowed per driver)

	 IP 20	 IP 20
Reference	**12403730**	**12400730**
Dimensions (LxWxH)	115x34x19	115x34x19
Input	220-240V 50/60Hz	220-240V 50/60Hz
Ambient temperature	-25°C to +45°C	-25°C to +50°C
Power factor (max)	0.54	0.54
Dimming	-	-
Max drivers on MCB 16A type B	27	27
Output	**350mA** / 15W 1-43V DC	**500mA** / 12W 1-24V DC
Chapeau 206 LED GE	1	
Duell recessed 1x LED GE	2	1
Duell recessed 2x LED GE	1	
Hipy 110 IP67 LED GE	2 ⚠	1 ⚠
Hipy 70 IP67 LED GE	4 ⚠	
Julien IP54 LED GE	4	
K72 IP54 LED GE	2	1
K77 adjustable LED GE	2	1
Kurk IP40 LED GE	2	1
Kurk surface IP40 LED GE	2	1
Lotis 82 (concrete) LED GE	2	1
Lotis 86 IP55 LED GE	2	1
Lotis 97 (concrete) adjustable LED GE	2	1
Lotis square (IP55) LED GE	2	1
Marcel 1x LED GE	1	
Marcel 2x LED GE	½ *	
Marcel 3x LED GE	⅓ **	
Marty LED GE	15	
Mini multiple 1x LED GE	2	1
Mini multiple 2x LED GE	1	
Mini multiple 3x LED GE		
Mini multiple 4x LED GE		
M-LED 50 GE	2	1
M-LED 70 GE	2	1
M-LED 111 GE	1	
Médard ceiling recessed LED GE	1	
Nomad 111 2x LED GE		
Nomad 111 4x LED GE		
Nomad 70 2x LED GE	1	
Nomad 70 4x LED GE		
Rektor recessed LED GE	1	
Scotty 270 adjustable LED GE	1	
Scotty 270 LED GE	1	
Slide IP54 LED GE	2	1
Smart cake / kup / lotis / asy lotis 48 (IP54) LED GE	15	8
Smart cake / kup / lotis 82 (IP54) LED GE	2	1
Smart cake / kup / lotis 115 adjustable LED GE	2	1
Smart cake / kup / lotis 115 (diffuse) (IP54) LED GE	1	
Smart cake / kup / lotis 160 (diffuse) (IP54) LED GE		
Stove LED GE	1	
(Asy) Wink 115 LED GE	1	

⚠ driver does not fit through cutout hole of fixture * requires 2 drivers ** requires 3 drivers

	 CE IP 20				
Reference	**12403430**				
Dimensions (LxWxH)	124x79x22				
Input	220-240V 50/60Hz				
Ambient temperature	-25°C to +45°C				
Power factor (max)	0.95				
Dimming	-				
Max drivers on MCB 16A type B	15				
Output	**350mA** / 25W 1-74V DC	**500mA** / 35W 1-72V DC	**700mA** / 50W 1-71V DC	**900mA** / 50W 1-55V DC	**1050mA** / 50W 1-48V DC
DIP-switch setting					
Chapeau 206 LED GE	2	2			
Duell recessed 1x LED GE	3	3			
Duell recessed 2x LED GE	1	1			
Hipy 110 IP67 LED GE	3 ⚠	3 ⚠	3 ⚠		
Hipy 70 IP67 LED GE	7 ⚠				
Julien IP54 LED GE	7				
K72 IP54 LED GE	4 ⚠	3 ⚠			
K77 adjustable LED GE	4 ⚠	3 ⚠			
Kurk IP40 LED GE	3	3	3		
Kurk surface IP40 LED GE	3	3	3		
Lotis 82 (concrete) LED GE	3 ⚠	3 ⚠			
Lotis 86 IP55 LED GE	3 ⚠	3 ⚠			
Lotis 97 (concrete) adjustable LED GE	3	3			
Lotis square (IP55) LED GE	3 ⚠	3 ⚠			
Marcel 1x LED GE	2	2	2		
Marcel 2x LED GE	1	1	1		
Marcel 3x LED GE	½ *	½ *	½ *		
Marty LED GE	26 ⚠				
Mini multiple 1x LED GE	3	3			
Mini multiple 2x LED GE	1	1			
Mini multiple 3x LED GE	1	1			
Mini multiple 4x LED GE					
M-LED 50 GE	4	3			
M-LED 70 GE	4	3			
M-LED 111 GE	2	2	2	1	
Médard ceiling recessed LED GE	2 ⚠	2 ⚠			
Nomad 111 2x LED GE	1	1	1		
Nomad 111 4x LED GE	½ *	½ *	½ *		
Nomad 70 2x LED GE	1	1			
Nomad 70 4x LED GE	½ *	½ *			
Rektor recessed LED GE	2 ⚠	2 ⚠			
Scotty 270 adjustable LED GE	1				
Scotty 270 LED GE	1	1			
Slide IP54 LED GE	4	3			
Smart cake / kup / lotis / asy lotis 48 (IP54) LED GE	26 ⚠	25 ⚠			
Smart cake / kup / lotis 82 (IP54) LED GE	3 ⚠	3 ⚠			
Smart cake / kup / lotis 115 adjustable LED GE	3	3			
Smart cake / kup / lotis 115 (diffuse) (IP54) LED GE	2	2	2	1	
Smart cake / kup / lotis 160 (diffuse) (IP54) LED GE		2	2	1	1
Stove LED GE	2	2			
(Asy) Wink 115 LED GE	2	2	2	1	

⚠ driver does not fit through cutout hole of fixture * requires 2 drivers ** requires 3 drivers

	 CE 1-10V PUSH IP 20		
Reference	**12403830**		
Dimensions (LxWxH)	111x52x22		
Input	220-240V 50/60Hz		
Ambient temperature	-25°C to +50°C		
Power factor (max)	0.95		
Dimming	1-10V/PUSH DIM		
Max drivers on MCB 16A type B	50		
Output	**350mA** / 15W 1-43V DC	**500mA** / 20W 1-43V DC	**700mA** / 20W 1-36V DC
DIP-switch setting			
Chapeau 206 LED GE	1	1	
Duell recessed 1x LED GE	2	1	
Duell recessed 2x LED GE	1		
Hipy 110 IP67 LED GE	2 ⚠	1 ⚠	1 ⚠
Hipy 70 IP67 LED GE	4 ⚠		
Julien IP54 LED GE	4		
K72 IP54 LED GE	2	2	
K77 adjustable LED GE	2	2	
Kurk IP40 LED GE	2	1	1
Kurk surface IP40 LED GE	2	1	1
Lotis 82 (concrete) LED GE	2	1	
Lotis 86 IP55 LED GE	2	1	
Lotis 97 (concrete) adjustable LED GE	2	1	
Lotis square (IP55) LED GE	2	1	
Marcel 1x LED GE	1	1	
Marcel 2x LED GE	½ *	½ *	
Marcel 3x LED GE	⅓ **	⅓ **	
Marty LED GE	15 ⚠		
Mini multiple 1x LED GE	2	1	
Mini multiple 2x LED GE	1		
Mini multiple 3x LED GE			
Mini multiple 4x LED GE			
M-LED 50 GE	2	2	
M-LED 70 GE	2	2	
M-LED 111 GE	1	1	
Médard ceiling recessed LED GE	1	1	
Nomad 111 2x LED GE			
Nomad 111 4x LED GE			
Nomad 70 2x LED GE	1		
Nomad 70 4x LED GE	½ *		
Rektor recessed LED GE	1	1	
Scotty 270 adjustable LED GE			
Scotty 270 LED GE			
Slide IP54 LED GE	2	2	
Smart cake / kup / lotis / asy lotis 48 (IP54) LED GE	15 ⚠	14 ⚠	
Smart cake / kup / lotis 82 (IP54) LED GE	2	1	
Smart cake / kup / lotis 115 adjustable LED GE	2	1	
Smart cake / kup / lotis 115 (diffuse) (IP54) LED GE	1	1	
Smart cake / kup / lotis 160 (diffuse) (IP54) LED GE		1	
Stove LED GE	1	1	
(Asy) Wink 115 LED GE	1	1	

⚠ driver does not fit through cutout hole of fixture * requires 2 drivers ** requires 3 drivers

	 IP 20		
Reference	**12403930**		
Dimensions (LxWxH)	111x52x22		
Input	220-240V 50/60Hz		
Ambient temperature	-25°C to +50°C		
Power factor (max)	0.92		
Dimming	DALI		
Max drivers on MCB 16A type B	50		
Output	**350mA** / 15W 1-43V DC	**500mA** / 20W 1-40V DC	**700mA** / 20W 1-28V DC
DIP-switch setting			
Chapeau 206 LED GE	1	1	
Duell recessed 1x LED GE	2	1	
Duell recessed 2x LED GE	1		
Hipy 110 IP67 LED GE	2 ⚠	1 ⚠	1 ⚠
Hipy 70 IP67 LED GE	4 ⚠		
Julien IP54 LED GE	4		
K72 IP54 LED GE	2	2	
K77 adjustable LED GE	2	2	
Kurk IP40 LED GE	2	1	1
Kurk surface IP40 LED GE	2	1	1
Lotis 82 (concrete) LED GE	2	1	
Lotis 86 IP55 LED GE	2	1	
Lotis 97 (concrete) adjustable LED GE	2	1	
Lotis square (IP55) LED GE	2	1	
Marcel 1x LED GE	1	1	
Marcel 2x LED GE	½ *	½ *	
Marcel 3x LED GE	⅓ **	⅓ **	
Marty LED GE	15 ⚠		
Mini multiple 1x LED GE	2	1	
Mini multiple 2x LED GE	1		
Mini multiple 3x LED GE			
Mini multiple 4x LED GE			
M-LED 50 GE	2	2	
M-LED 70 GE	2	2	
M-LED 111 GE	1	1	
Médard ceiling recessed LED GE	1	1	
Nomad 111 2x LED GE			
Nomad 111 4x LED GE			
Nomad 70 2x LED GE	1		
Nomad 70 4x LED GE	½ *		
Rektor recessed LED GE	1	1	
Scotty 270 adjustable LED GE			
Scotty 270 LED GE			
Slide IP54 LED GE	2	2	
Smart cake / kup / lotis / asy lotis 48 (IP54) LED GE	15 ⚠	14 ⚠	
Smart cake / kup / lotis 82 (IP54) LED GE	2	1	
Smart cake / kup / lotis 115 adjustable LED GE	2	1	
Smart cake / kup / lotis 115 (diffuse) (IP54) LED GE	1	1	
Smart cake / kup / lotis 160 (diffuse) (IP54) LED GE		1	
Stove LED GE	1	1	
(Asy) Wink 115 LED GE	1	1	

⚠ driver does not fit through cutout hole of fixture * requires 2 drivers ** requires 3 drivers

ELECTRICAL | DRIVER MATRIX

multi current - dimmable (number of products allowed per driver)

	 ⧈ CE 1-10V PUSH (SYNC) IP 20		
Reference	**12403630**		
Dimensions (LxWxH)	103x67x21		
Input	220-240V 50/60Hz		
Ambient temperature	-25°C to +50°C		
Power factor (max)	0.98		
Dimming	1-10V/PUSH DIM (push dim: optional sync cable 12400100)		
Max drivers on MCB 16A type B	15		
Output	**350mA** / 15W 1-43V DC	**500mA** / 22W 1-43V DC	**700mA** / 25W 1-36V DC
DIP-switch setting			
Chapeau 206 LED GE	1	1	
Duell recessed 1x LED GE	2	2	
Duell recessed 2x LED GE	1	1	
Hipy 110 IP67 LED GE	2 ⚠	2 ⚠	1 ⚠
Hipy 70 IP67 LED GE	4 ⚠		
Julien IP54 LED GE	4		
K72 IP54 LED GE	2 ⚠	2 ⚠	
K77 adjustable LED GE	2	2	
Kurk IP40 LED GE	2	2	1
Kurk surface IP40 LED GE	2	2	1
Lotis 82 (concrete) LED GE	2	2	
Lotis 86 IP55 LED GE	2	2	
Lotis 97 (concrete) adjustable LED GE	2	2	
Lotis square (IP55) LED GE	2	2	
Marcel 1x LED GE	1	1	1
Marcel 2x LED GE	½ *	½ *	½ *
Marcel 3x LED GE	⅓ **	⅓ **	⅓ **
Marty LED GE	15 ⚠		
Mini multiple 1x LED GE	2	2	
Mini multiple 2x LED GE	1	1	
Mini multiple 3x LED GE			
Mini multiple 4x LED GE			
M-LED 50 GE	2	2	
M-LED 70 GE	2	2	
M-LED 111 GE	1	1	1
Médard ceiling recessed LED GE	1 ⚠	1 ⚠	
Nomad 111 2x LED GE			
Nomad 111 4x LED GE			
Nomad 70 2x LED GE	1	1	
Nomad 70 4x LED GE	½ *	½ *	
Rektor recessed LED GE	1 ⚠	1 ⚠	
Scotty 270 adjustable LED GE	1		
Scotty 270 LED GE	1	1	
Slide IP54 LED GE	2	2	
Smart cake / kup / lotis / asy lotis 48 (IP54) LED GE	15 ⚠	15 ⚠	
Smart cake / kup / lotis 82 (IP54) LED GE	2	2	
Smart cake / kup / lotis 115 adjustable LED GE	2	2	
Smart cake / kup / lotis 115 (diffuse) (IP54) LED GE	1	1	1
Smart cake / kup / lotis 160 (diffuse) (IP54) LED GE		1	1
Stove LED GE	1	1	
(Asy) Wink 115 LED GE	1	1	1

⚠ driver does not fit through cutout hole of fixture * requires 2 drivers ** requires 3 drivers

	 IP 20		
Reference	**12403230**		
Dimensions (LxWxH)	103x67x21		
Input	220-240V 50/60Hz		
Ambient temperature	-25°C to +50°C		
Power factor (max)	0.98		
Dimming	DALI		
Max drivers on MCB 16A type B	50		
Output	**350mA** / 15W 1-47V DC	**500mA** / 24W 1-47V DC	**700mA** / 32W 1-46V DC
DIP-switch setting			
Chapeau 206 LED GE	1	1	
Duell recessed 1x LED GE	2	2	
Duell recessed 2x LED GE	1	1	
Hipy 110 IP67 LED GE	2 ⚠	2 ⚠	2 ⚠
Hipy 70 IP67 LED GE	4 ⚠		
Julien IP54 LED GE	4		
K72 IP54 LED GE	2 ⚠	2 ⚠	
K77 adjustable LED GE	2	2	
Kurk IP40 LED GE	2	2	2
Kurk surface IP40 LED GE	2	2	2
Lotis 82 (concrete) LED GE	2	2	
Lotis 86 IP55 LED GE	2	2	
Lotis 97 (concrete) adjustable LED GE	2	2	
Lotis square (IP55) LED GE	2	2	
Marcel 1x LED GE	1	1	1
Marcel 2x LED GE	½ *	½ *	½ *
Marcel 3x LED GE	⅓ **	⅓ **	⅓ **
Marty LED GE	15 ⚠		
Mini multiple 1x LED GE	2	2	
Mini multiple 2x LED GE	1	1	
Mini multiple 3x LED GE			
Mini multiple 4x LED GE			
M-LED 50 GE	2	2	
M-LED 70 GE	2	2	
M-LED 111 GE	1	1	1
Médard ceiling recessed LED GE	1 ⚠	1 ⚠	
Nomad 111 2x LED GE			
Nomad 111 4x LED GE			
Nomad 70 2x LED GE	1	1	
Nomad 70 4x LED GE	½ *	½ *	
Rektor recessed LED GE	1 ⚠	1 ⚠	
Scotty 270 adjustable LED GE	1		
Scotty 270 LED GE	1	1	
Slide IP54 LED GE	2	2	
Smart cake / kup / lotis / asy lotis 48 (IP54) LED GE	15 ⚠	17 ⚠	
Smart cake / kup / lotis 82 (IP54) LED GE	2	2	
Smart cake / kup / lotis 115 adjustable LED GE	2	2	
Smart cake / kup / lotis 115 (diffuse) (IP54) LED GE	1	1	1
Smart cake / kup / lotis 160 (diffuse) (IP54) LED GE		1	1
Stove LED GE	1	1	
(Asy) Wink 115 LED GE	1	1	1

⚠ driver does not fit through cutout hole of fixture * requires 2 drivers ** requires 3 drivers

	 CE 1-10V PUSH (SYNC) PR IP 20				
Reference	**12403530**				
Dimensions (LxWxH)	124x79x22				
Input	220-240V 50/60Hz				
Ambient temperature	-25°C to +45°C				
Power factor (max)	0.95				
Dimming	1-10V/PUSH DIM (push dim: optional sync cable 12400100)				
Max drivers on MCB 16A type B	15				
Output	**350mA** / 25W 1-74V DC	**500mA** / 35W 1-72V DC	**700mA** / 50W 1-71V DC	**900mA** / 50W 1-55V DC	**1050mA** / 50W 1-48V DC
DIP-switch setting					
Chapeau 206 LED GE	2	2			
Duell recessed 1x LED GE	3	3			
Duell recessed 2x LED GE	1	1			
Hipy 110 IP67 LED GE	3 ⚠	3 ⚠	3 ⚠		
Hipy 70 IP67 LED GE	7 ⚠				
Julien IP54 LED GE	7				
K72 IP54 LED GE	4 ⚠	3 ⚠			
K77 adjustable LED GE	4 ⚠	3 ⚠			
Kurk IP40 LED GE	3	3	3		
Kurk surface IP40 LED GE	3	3	3		
Lotis 82 (concrete) LED GE	3 ⚠	3 ⚠			
Lotis 86 IP55 LED GE	3 ⚠	3 ⚠			
Lotis 97 (concrete) adjustable LED GE	3	3			
Lotis square (IP55) LED GE	3 ⚠	3 ⚠			
Marcel 1x LED GE	2	2	2		
Marcel 2x LED GE	1	1	1		
Marcel 3x LED GE	½ *	½ *	½ *		
Marty LED GE	26 ⚠				
Mini multiple 1x LED GE	3	3			
Mini multiple 2x LED GE	1	1			
Mini multiple 3x LED GE	1	1			
Mini multiple 4x LED GE					
M-LED 50 GE	4	3			
M-LED 70 GE	4	3			
M-LED 111 GE	2	2	2	1	
Médard ceiling recessed LED GE	2 ⚠	2 ⚠			
Nomad 111 2x LED GE	1	1	1		
Nomad 111 4x LED GE	½ *	½ *	½ *		
Nomad 70 2x LED GE	1	1			
Nomad 70 4x LED GE	½ *	½ *			
Rektor recessed LED GE	2 ⚠	2 ⚠			
Scotty 270 adjustable LED GE	1				
Scotty 270 LED GE	1	1			
Slide IP54 LED GE	4	3			
Smart cake / kup / lotis / asy lotis 48 (IP54) LED GE	26 ⚠	25 ⚠			
Smart cake / kup / lotis 82 (IP54) LED GE	3 ⚠	3 ⚠			
Smart cake / kup / lotis 115 adjustable LED GE	3	3			
Smart cake / kup / lotis 115 (diffuse) (IP54) LED GE	2	2	2	1	
Smart cake / kup / lotis 160 (diffuse) (IP54) LED GE		2	2	1	1
Stove LED GE	2	2			
(Asy) Wink 115 LED GE	2	2	2	1	

⚠ driver does not fit through cutout hole of fixture * requires 2 drivers ** requires 3 drivers

	 CE DALI 1-10V PUSH (SYNC) PR IP 20				
Reference	**12400530**				
Dimensions (LxWxH)	124x79x22				
Input	220-240V 50/60Hz				
Ambient temperature	-25°C to +45°C				
Power factor (max)	0.95				
Dimming	DALI/1-10V/PUSH DIM (push dim: optional sync cable 12400100)				
Max drivers on MCB 16A type B	15				
Output	**350mA** / 25W 1-74V DC	**500mA** / 35W 1-72V DC	**700mA** / 50W 1-71V DC	**900mA** / 50W 1-55V DC	**1050mA** / 50W 1-48V DC
DIP-switch setting					
Chapeau 206 LED GE	2	2			
Duell recessed 1x LED GE	3	3			
Duell recessed 2x LED GE	1	1			
Hipy 110 IP67 LED GE	3 ⚠	3 ⚠	3 ⚠		
Hipy 70 IP67 LED GE	7 ⚠				
Julien IP54 LED GE	7				
K72 IP54 LED GE	4 ⚠	3 ⚠			
K77 adjustable LED GE	4 ⚠	3 ⚠			
Kurk IP40 LED GE	3	3	3		
Kurk surface IP40 LED GE	3	3	3		
Lotis 82 (concrete) LED GE	3 ⚠	3 ⚠			
Lotis 86 IP55 LED GE	3 ⚠	3 ⚠			
Lotis 97 (concrete) adjustable LED GE	3	3			
Lotis square (IP55) LED GE	3 ⚠	3 ⚠			
Marcel 1x LED GE	2	2	2		
Marcel 2x LED GE	1	1	1		
Marcel 3x LED GE	½ *	½ *	½ *		
Marty LED GE	26 ⚠				
Mini multiple 1x LED GE	3	3			
Mini multiple 2x LED GE	1	1			
Mini multiple 3x LED GE	1	1			
Mini multiple 4x LED GE					
M-LED 50 GE	4	3			
M-LED 70 GE	4	3			
M-LED 111 GE	2	2	2	1	
Médard ceiling recessed LED GE	2 ⚠	2 ⚠			
Nomad 111 2x LED GE	1	1	1		
Nomad 111 4x LED GE	½ *	½ *	½ *		
Nomad 70 2x LED GE	1	1			
Nomad 70 4x LED GE	½ *	½ *			
Rektor recessed LED GE	2 ⚠	2 ⚠			
Scotty 270 adjustable LED GE	1				
Scotty 270 LED GE	1	1			
Slide IP54 LED GE	2	2			
Smart cake / kup / lotis / asy lotis 48 (IP54) LED GE	26 ⚠	25 ⚠			
Smart cake / kup / lotis 82 (IP54) LED GE	3 ⚠	3 ⚠			
Smart cake / kup / lotis 115 adjustable LED GE	3	3			
Smart cake / kup / lotis 115 (diffuse) (IP54) LED GE	2	2	2	1	
Smart cake / kup / lotis 160 (diffuse) (IP54) LED GE		2	2	1	1
Stove LED GE	2	2			
(Asy) Wink 115 LED GE	2	2	2	1	

⚠ driver does not fit through cutout hole of fixture * requires 2 drivers ** requires 3 drivers

	 1-10V PUSH (SYNC) IP 20		
Reference	**12404530**		
Dimensions (LxWxH)	124x79x22		
Input	220-240V 50/60Hz		
Ambient temperature	-25°C to +50°C		
Power factor (max)	0.95		
Dimming	DALI/1-10V/PUSH DIM (push dim: optional sync cable 12400100)		
Max drivers on MCB 16A type B	15		
Output	**350mA** / 40W 1-112V DC	**500mA** / 50W 1-100V DC	**700mA** / 50W 1-70V DC
DIP-switch setting			

Chapeau 206 LED GE	3	3	
Duell recessed 1x LED GE	5	4	
Duell recessed 2x LED GE	2	2	
Hipy 110 IP67 LED GE	5 ⚠	4 ⚠	3 ⚠
Hipy 70 IP67 LED GE	11 ⚠		
Julien IP54 LED GE	11		
K72 IP54 LED GE	6 ⚠	5 ⚠	
K77 adjustable LED GE	6 ⚠	5 ⚠	
Kurk IP40 LED GE	5	4	3
Kurk surface IP40 LED GE	5	4	3
Lotis 82 (concrete) LED GE	5 ⚠	4 ⚠	
Lotis 86 IP55 LED GE	5 ⚠	4 ⚠	
Lotis 97 (concrete) adjustable LED GE	5	4	
Lotis square (IP55) LED GE	5 ⚠	4 ⚠	
Marcel 1x LED GE	3	2	1
Marcel 2x LED GE	1	1	½ *
Marcel 3x LED GE	1	½ *	⅓ **
Marty LED GE	41 ⚠		
Mini multiple 1x LED GE	5	4	
Mini multiple 2x LED GE	2	2	
Mini multiple 3x LED GE	1	1	
Mini multiple 4x LED GE	1	1	
M-LED 50 GE	6 ⚠	5 ⚠	
M-LED 70 GE	6 ⚠	5 ⚠	
M-LED 111 GE	3	3	2
Médard ceiling recessed LED GE	3 ⚠	3 ⚠	
Nomad 111 2x LED GE	1	1	1
Nomad 111 4x LED GE	½ *	½ *	½ *
Nomad 70 2x LED GE	2	2	
Nomad 70 4x LED GE	1	1	
Rektor recessed LED GE	3 ⚠	3 ⚠	
Scotty 270 adjustable LED GE	2		
Scotty 270 LED GE	2	2	
Slide IP54 LED GE	6	5	
Smart cake / kup / lotis / asy lotis 48 (IP54) LED GE	41 ⚠	36 ⚠	
Smart cake / kup / lotis 82 (IP54) LED GE	5 ⚠	4 ⚠	
Smart cake / kup / lotis 115 adjustable LED GE	5	4	
Smart cake / kup / lotis 115 (diffuse) (IP54) LED GE	3	3	2
Smart cake / kup / lotis 160 (diffuse) (IP54) LED GE		3	2
Stove LED GE	3	3	
(Asy) Wink 115 LED GE	3	3	2

⚠ driver does not fit through cutout hole of fixture * requires 2 drivers ** requires 3 drivers

	 ⧈ CE DALI 1-10V PUSH (SYNC) IP 20		
Reference	**12404030**		
Dimensions (LxWxH)	129x76x30		
Input	220-240V 50/60Hz		
Ambient temperature	-25°C to +50°C		
Power factor (max)	0.95		
Dimming	DALI/1-10V/PUSH DIM (push dim: optional sync cable 12400100)		
Max drivers on MCB 16A type B	15		
Output	**1050mA** / 45W 1-44V DC	**1400mA** / 55W 1-39V DC	**1600mA** / 55W 1-35V DC
DIP-switch setting			

Chapeau 206 LED GE			
Duell recessed 1x LED GE			
Duell recessed 2x LED GE			
Hipy 110 IP67 LED GE			
Hipy 70 IP67 LED GE			
Julien IP54 LED GE			
K72 IP54 LED GE			
K77 adjustable LED GE			
Kurk IP40 LED GE			
Kurk surface IP40 LED GE			
Lotis 82 (concrete) LED GE			
Lotis 86 IP55 LED GE			
Lotis 97 (concrete) adjustable LED GE			
Lotis square (IP55) LED GE			
Marcel 1x LED GE			
Marcel 2x LED GE			
Marcel 3x LED GE			
Marty LED GE			
Mini multiple 1x LED GE			
Mini multiple 2x LED GE			
Mini multiple 3x LED GE			
Mini multiple 4x LED GE			
M-LED 50 GE			
M-LED 70 GE			
M-LED 111 GE			
Médard ceiling recessed LED GE			
Nomad 111 2x LED GE			
Nomad 111 4x LED GE			
Nomad 70 2x LED GE			
Nomad 70 4x LED GE			
Rektor recessed LED GE			
Scotty 270 adjustable LED GE			
Scotty 270 LED GE			
Slide IP54 LED GE			
Smart cake / kup / lotis / asy lotis 48 (IP54) LED GE			
Smart cake / kup / lotis 82 (IP54) LED GE			
Smart cake / kup / lotis 115 adjustable LED GE			
Smart cake / kup / lotis 115 (diffuse) (IP54) LED GE			
Smart cake / kup / lotis 160 (diffuse) (IP54) LED GE	1	1	1
Stove LED GE			
(Asy) Wink 115 LED GE			

⚠ driver does not fit through cutout hole of fixture * requires 2 drivers ** requires 3 drivers

ELECTRICAL | DRIVER MATRIX

multi current - dimmable (number of products allowed per driver)

	 IP 20	 IP 20
Reference	**12404830**	**12404930**
Dimensions (LxWxH)	102x38x21	102x38x21
Input	220-240V 50/60Hz	220-240V 50/60Hz
Ambient temperature	-25°C to +45°C	-25°C to +45°C
Power factor (max)	0.96	0.96
Dimming	TRAILING EDGE/LEADING EDGE	TRAILING EDGE/LEADING EDGE
Max drivers on MCB 16A type B	50	50
Output	**350mA** / 4-10W 12-28V DC	**500mA** / 5-10W 10-20V DC
Chapeau 206 LED GE		
Duell recessed 1x LED GE	1	1
Duell recessed 2x LED GE	½ *	
Hipy 110 IP67 LED GE	1 ⚠	1 ⚠
Hipy 70 IP67 LED GE	2-3 ⚠	
Julien IP54 LED GE	2 ⚠	
K72 IP54 LED GE	1	1
K77 adjustable LED GE	1	1
Kurk IP40 LED GE	1	
Kurk surface IP40 LED GE	1	
Lotis 82 (concrete) LED GE	1	1
Lotis 86 IP55 LED GE	1	1
Lotis 97 (concrete) adjustable LED GE	1	1
Lotis square (IP55) LED GE	1	1
Marcel 1x LED GE		
Marcel 2x LED GE		
Marcel 3x LED GE		
Marty LED GE	5-10	
Mini multiple 1x LED GE	1	
Mini multiple 2x LED GE		
Mini multiple 3x LED GE		
Mini multiple 4x LED GE		
M-LED 50 GE	1	1
M-LED 50 **warm dim** GE	1	
M-LED 70 GE	1	1
M-LED 70 **warm dim** GE	1	
M-LED 111 GE		
Médard ceiling recessed LED GE		
Nomad 111 2x LED GE		
Nomad 111 4x LED GE		
Nomad 70 2x LED GE		
Nomad 70 4x LED GE		
Rektor recessed LED GE		
Scotty 270 adjustable LED GE		
Scotty 270 LED GE		
Slide IP54 LED GE	1	1
Smart cake / kup / lotis / asy lotis 48 (IP54) LED GE	5-10	4-7
Smart cake / kup / lotis 82 (IP54) LED GE	1	1
Smart cake / kup / lotis 82 **warm dim** LED GE	1	
Smart cake / kup / lotis 115 adjustable LED GE		
Smart cake / kup / lotis 115 (diffuse) (IP54) LED GE		
Smart cake / kup / lotis 115 adjustable **warm dim** LED GE		
Smart cake / kup / lotis 160 (diffuse) (IP54) LED GE		
Stove LED GE		
(Asy) Wink 115 LED GE		

⚠ driver does not fit through cutout hole of fixture

⚠ no more, no less - only this exact amount of luminaires allowed

* requires 2 drivers ** requires 3 drivers

	 IP 20	 IP 20
Reference	**12404230**	**12404330**
Dimensions (LxWxH)	111x52x22	111x52x22
Input	220-240V 50/60Hz	220-240V 50/60Hz
Ambient temperature	-25°C to +50°C	-25°C to +45°C
Power factor (max)	0.95	0.95
Dimming	TRAILING EDGE/LEADING EDGE	TRAILING EDGE/LEADING EDGE
Max drivers on MCB 16A type B	50	50
Output	**350mA** / 8-18W 25-51V DC	**500mA** / 8-20W 16-40V DC

Chapeau 206 LED GE	1	1
Duell recessed 1x LED GE	2 !	2 !
Duell recessed 2x LED GE	1	1
Hipy 110 IP67 LED GE	2 ⚠ !	2 ⚠
Hipy 70 IP67 LED GE	3-5 ⚠	
Julien IP54 LED GE	3-5	
K72 IP54 LED GE	2 !	2 !
K77 adjustable LED GE	2 !	2 !
Kurk IP40 LED GE	2 !	1
Kurk surface IP40 LED GE	2 !	1
Lotis 82 (concrete) LED GE	2 !	2 !
Lotis 86 IP55 LED GE	2 !	2 !
Lotis 97 (concrete) adjustable LED GE	2 !	2 !
Lotis square (IP55) LED GE	2 !	2 !
Marcel 1x LED GE		1
Marcel 2x LED GE		½ *
Marcel 3x LED GE		⅓ **
Marty LED GE	10-18 ⚠	
Mini multiple 1x LED GE	2 !	1
Mini multiple 2x LED GE	1	
Mini multiple 3x LED GE		
Mini multiple 4x LED GE		
M-LED 50 GE	2 !	2 !
M-LED 50 **warm dim** GE	2 !	
M-LED 70 GE	2 !	2 !
M-LED 70 **warm dim** GE	2 !	
M-LED 111 GE	1	1
Médard ceiling recessed LED GE	1	1
Nomad 111 2x LED GE		
Nomad 111 4x LED GE		
Nomad 70 2x LED GE	1	
Nomad 70 4x LED GE	½ *	
Rektor recessed LED GE	1	1
Scotty 270 adjustable LED GE	1	
Scotty 270 LED GE	1	
Slide IP54 LED GE	2 !	2 !
Smart cake / kup / lotis / asy lotis 48 (IP54) LED GE	10-18 ⚠	6-14 ⚠
Smart cake / kup / lotis 82 (IP54) LED GE	2 !	2 !
Smart cake / kup / lotis 82 **warm dim** LED GE	1	
Smart cake / kup / lotis 115 adjustable LED GE	2 !	2 !
Smart cake / kup / lotis 115 (diffuse) (IP54) LED GE	1	1
Smart cake / kup / lotis 115 adjustable **warm dim** LED GE	1	
Smart cake / kup / lotis 160 (diffuse) (IP54) LED GE		1
Stove LED GE	1	1
(Asy) Wink 115 LED GE	1	1

⚠ driver does not fit through cutout hole of fixture
! no more, no less - only this exact amount of luminaires allowed

* requires 2 drivers ** requires 3 drivers

	 IP 20		
Reference	**12400330**		
Dimensions (LxWxH)	166x46x34		
Input	220-240V 50/60Hz		
Ambient temperature	-25°C to +45°C		
Power factor (max)	0.97		
Dimming	TRAILING EDGE/LEADING EDGE		
Max drivers on MCB 16A type B	50		
Output	**350mA** / 17W 1-47V DC	**500mA** / 24W 1-47V DC	**700mA** / 32W 1-46V DC
DIP-switch setting			
Chapeau 206 LED GE	1	1	
Duell recessed 1x LED GE	2	2	
Duell recessed 2x LED GE	1	1	
Hipy 110 IP67 LED GE	2 ⚠	2 ⚠	2 ⚠
Hipy 70 IP67 LED GE	4 ⚠		
Julien IP54 LED GE	4		
K72 IP54 LED GE	2	2	
K77 adjustable LED GE	2	2	
Kurk IP40 LED GE	2	2	2
Kurk surface IP40 LED GE	2	2	2
Lotis 82 (concrete) LED GE	2	2	
Lotis 86 IP55 LED GE	2	2	
Lotis 97 (concrete) adjustable LED GE	2	2	
Lotis square (IP55) LED GE	2	2	
Marcel 1x LED GE	1	1	1
Marcel 2x LED GE	½ *	½ *	½ *
Marcel 3x LED GE	⅓ **	⅓ **	⅓ **
Marty LED GE	16 ⚠		
Mini multiple 1x LED GE	2	2	
Mini multiple 2x LED GE	1	1	
Mini multiple 3x LED GE			
Mini multiple 4x LED GE			
M-LED 50 GE	2	2	
M-LED 70 GE	2	2	
M-LED 111 GE	1	1	1
Médard ceiling recessed LED GE	1	1	
Nomad 111 2x LED GE			
Nomad 111 4x LED GE			
Nomad 70 2x LED GE	1	1	
Nomad 70 4x LED GE	½ *	½ *	
Rektor recessed LED GE	1	1	
Scotty 270 adjustable LED GE	1		
Scotty 270 LED GE	1	1	
Slide IP54 LED GE	2	2	
Smart cake / kup / lotis / asy lotis 48 (IP54) LED GE	16 ⚠	16 ⚠	
Smart cake / kup / lotis 82 (IP54) LED GE	2	2	
Smart cake / kup / lotis 115 adjustable LED GE	2	2	
Smart cake / kup / lotis 115 (diffuse) (IP54) LED GE	1	1	1
Smart cake / kup / lotis 160 (diffuse) (IP54) LED GE		1	1
Stove LED GE	1	1	
(Asy) Wink 115 LED GE	1	1	1

⚠ driver does not fit through cutout hole of fixture * requires 2 drivers ** requires 3 drivers

	 1-10V IP 20
Reference	**12404630**
Dimensions (LxWxH)	110x52x23,5
Input	220-240V 50/60Hz
Ambient temperature	-20°C to +50°C
Power factor (max)	0.98
Dimming	1-10V
Max drivers on MCB 16A type B	136
Output	**340mA** / 20W 6-42V DC
DIP-switch setting	

M-LED 50 **warm dim** GE	2
M-LED 70 **warm dim** GE	2
Smart cake / kup / lotis 82 (IP54) LED **warm dim** GE	1
Smart cake / kup / lotis 115 adjustable LED **warm dim** GE	1

	 CE DALI 1-10V PUSH (SYNC) IP 20				
Reference	**12404730**				
Dimensions (LxWxH)	169x83x35				
Input	220-240V 50/60Hz				
Ambient temperature	-25°C to +45°C				
Power factor (max)	0.98				
Dimming	DALI/1-10V/PUSH DIM (push dim: optional sync cable 12400100)				
Max drivers on MCB 16A type B	30				
Output	**350mA** / 25W 1-71V DC	**500mA** / 35W 1-70V DC	**700mA** / 50W 1-70V DC	**900mA** / 50W 1-55V DC	**1050mA** / 50W 1-48V DC
DIP-switch setting	ON OFF 1 2 3 4 5 6	ON OFF 1 2 3 4 5 6	ON OFF 1 2 3 4 5 6	ON OFF 1 2 3 4 5 6	ON OFF 1 2 3 4 5 6
Chapeau 206 LED GE	2	2			
Duell recessed 1x LED GE	3	3			
Duell recessed 2x LED GE	1	1			
Hipy 110 IP67 LED GE	3	3	3		
Hipy 70 IP67 LED GE	7 ⚠				
Julien IP54 LED GE	7				
K72 IP54 LED GE	3 ⚠	3 ⚠			
K77 adjustable LED GE	3 ⚠	3 ⚠			
Kurk IP40 LED GE	3	3	3		
Kurk surface IP40 LED GE	3	3	3		
Lotis 82 (concrete) LED GE	3 ⚠	3 ⚠			
Lotis 86 IP55 LED GE	3 ⚠	3 ⚠			
Lotis 97 (concrete) adjustable LED GE	3 ⚠	3 ⚠			
Lotis square (IP55) LED GE	3 ⚠	3 ⚠			
Marcel 1x LED GE	2	2	1		
Marcel 2x LED GE	1	1	½ *		
Marcel 3x LED GE	½ *	½ *	⅓ **		
Marty LED GE	26 ⚠				
Mini multiple 1x LED GE	3	3			
Mini multiple 2x LED GE	1	1			
Mini multiple 3x LED GE	1	1			
Mini multiple 4x LED GE					
M-LED 50 GE	3	3			
M-LED 50 **warm dim** GE	3				
M-LED 70 GE	3	3			
M-LED 70 **warm dim** GE	3				
M-LED 111 GE	2	2	2	1	
Médard ceiling recessed LED GE	2 ⚠	2 ⚠			
Nomad 111 2x LED GE	1	1	1		
Nomad 111 4x LED GE					
Nomad 70 2x LED GE	1	1			
Nomad 70 4x LED GE					
Rektor recessed LED GE	2 ⚠	2 ⚠			
Scotty 270 adjustable LED GE	1				
Scotty 270 LED GE	1	1			
Slide IP54 LED GE	3 ⚠	3 ⚠			
Smart cake / kup / lotis / asy lotis 48 (IP54) LED GE	26 ⚠	25 ⚠			
Smart cake / kup / lotis 82 (IP54) LED GE	3 ⚠	3 ⚠			
Smart cake / kup / lotis 82 (IP54) LED **warm dim** GE	2 ⚠				
Smart cake / kup / lotis 115 adjustable LED GE	3	3			
Smart cake / kup / lotis 115 adjustable LED **warm dim** GE	2				
Smart cake / kup / lotis 115 (diffuse) (IP54) LED GE	2	2	2	1	
Smart cake / kup / lotis 160 (diffuse) (IP54) LED GE		2	2	1	1
Stove LED GE	2	2			
(Asy) Wink 115 LED GE	2	2	2	1	

⚠ driver does not fit through cutout hole of fixture * requires 2 drivers ** requires 3 drivers

	 IP 20	 1-10V PUSH (SYNC) IP 20
Reference	**12405030**	**12405130**
Dimensions (LxWxH)	240x60x49	240x60x49
Input	220-240V 50/60Hz	220-240V 50/60Hz
Ambient temperature	-40°C to +45°C	-25°C to +45°C
Power factor (max)	0.97	0.98
Dim		1-10V/PUSH DIM (pushdim: optional sync cable 12400100)
Max drivers on MCB 16A type B	8	8
Output (V) Output (W) Output (I max)	1x 24V 150W 6.25A	3x 24V 120W (max. 100W on one channel) 5A

	 PUSH IP 20
Reference	**12405230**
Dimensions (LxWxH)	295x43x30
Input	220-240V 50/60Hz
Ambient temperature	-40°C to +45°C
Power factor (max)	0.99
Dim	PUSH DIM/DALI/DSI
Max drivers on MCB 16A type B	9
Output (V) Output (W) Output (I max)	24V 100W 4.17A

	 IP 20	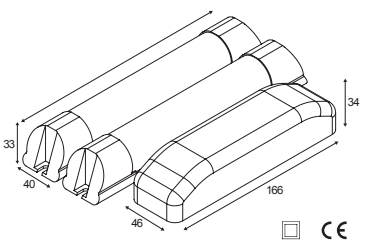 IP 20
Reference	**12400010**	**12400110**
Dimensions (LxWxH)	unit 166x46x34 / battery pack 135x45x23	unit 166x46x34 / 2x battery pack 212x40x33
Input	220-240V 50/60Hz	220-240V 50/60Hz
Ambient temperature	0°C to 50°C	0°C to 50°C
Emergency operating time	1 hour	3 hours
Charge time	24 hours	24 hours
Output	100-400mA 9-58V	100-400mA 9-58V
DIP-switch setting		

	Typical drive current	Emergency light output compared to light output at typical current
Chapeau 206 LED GE	350mA	50%
Duell recessed 1x LED GE	500mA	72%
Duell recessed 2x LED GE	500mA	72% *
Hipy 110 IP67 LED GE	500mA	72% ⚠
Hipy 70 IP67 LED GE	350mA	100% ⚠
Julien IP54 LED GE	350mA	100%
K72 IP54 LED GE	500mA	72%
K77 adjustable LED GE	500mA	72%
Kurk IP40 LED GE	700mA	47%
Kurk surface IP40 GE	700mA	47%
Lotis 82 LED GE	500mA	72%
Lotis 86 IP55 LED	500mA	72%
Lotis 97 adjustable LED GE	500mA	72%
Lotis square (IP55) LED GE	500mA	72%
Mini multiple 1x LED GE	500mA	65%
Mini multiple 2x LED GE	500mA	65% *
Mini multiple 3x LED GE	500mA	65% *
Mini multiple 4x LED GE	500mA	65% *

	Typical drive current	Emergency light output compared to light output at typical current
M-LED 111	500mA	38%
Médard ceiling recessed LED GE	500mA	38%
Nomad 111 2x LED GE	500mA	38% *
Nomad 111 4x LED GE	500mA	38% *
Nomad 70 2x LED GE	500mA	65% *
Nomad 70 4x LED GE	500mA	65% *
Rektor recessed LED GE	500mA	38% ⚠
Scotty 270 adjustable LED GE	350mA	43%
Scotty 270 LED GE	500mA	29%
Slide IP54 LED GE	500mA	72%
Smart cake / kup / lotis 48 LED GE	500mA	75% ⚠ **
Smart cake / kup / lotis 82 LED GE	500mA	72%
Smart cake / kup / lotis 115 adjustable LED GE	500mA	72%
Smart cake / kup / lotis 115 LED 1100-3000lm GE	500mA	38%
Smart cake / kup / lotis 160 (diffuse) (IP54) LED GE	900mA	25%
Stove LED GE	350mA	50%
(Asy) Wink 115 LED GE	500mA	38%

Wiring diagrams

Non-maintained (emergency only)

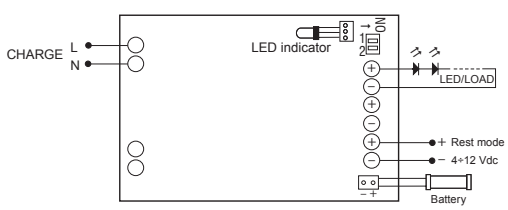

Maintained with external electronic driver

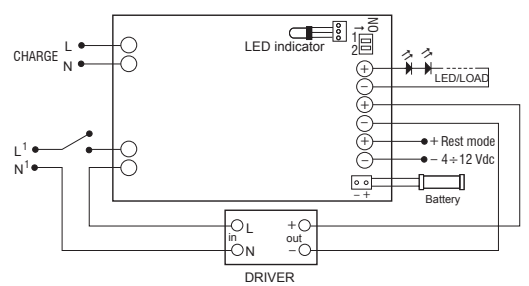

Remarks

- Respect polarity for installation of battery and LED luminaire.
- Keep batteries away from heat source.
- Do not connect any external battery charger!
- In order to check the correct functionality, we recommend a charging time of about 30 hours.
- It is advisable to effect every 3 months at least one discharge and charge cycle in order to assure the maximum efficiency.
- Replace the batteries every 4 years or after 500 charge/discharge cycles.
- Please check wire diagrams before installing.

⚠ driver does not fit through cutout hole of fixture

* when using only one lamp unit per emergency unit
** minimum 4 luminaires in series

MAINS DIMMING

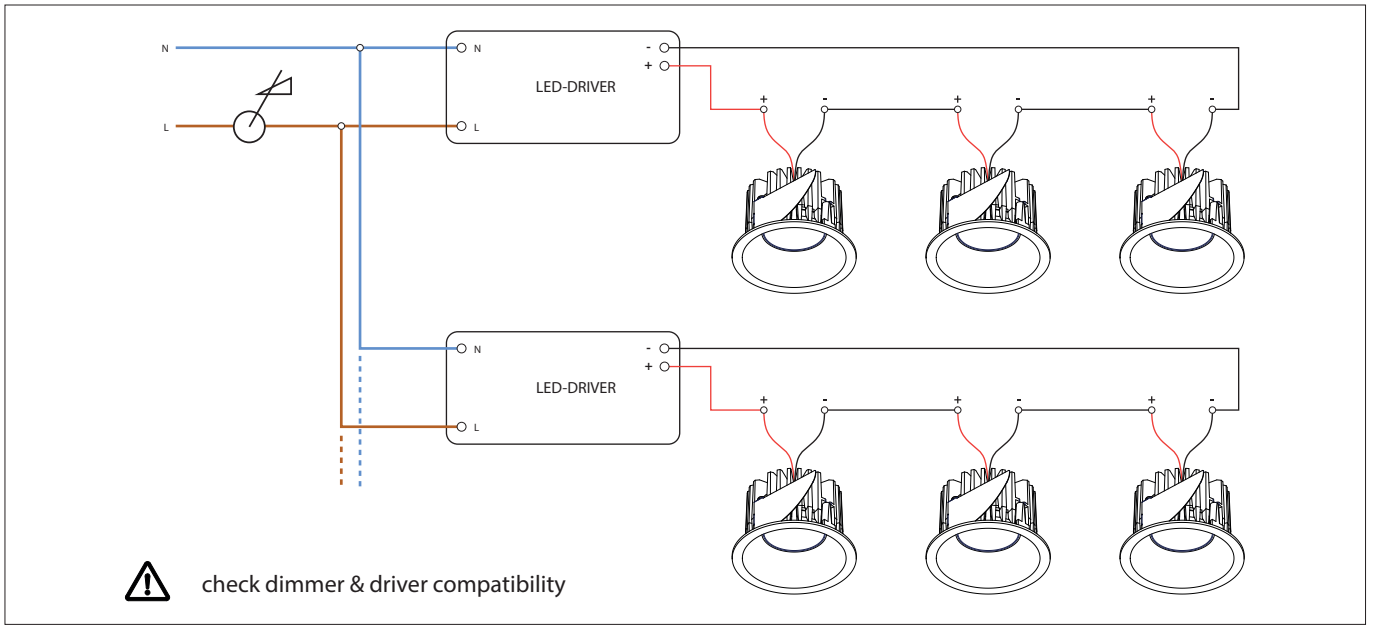

1-10V

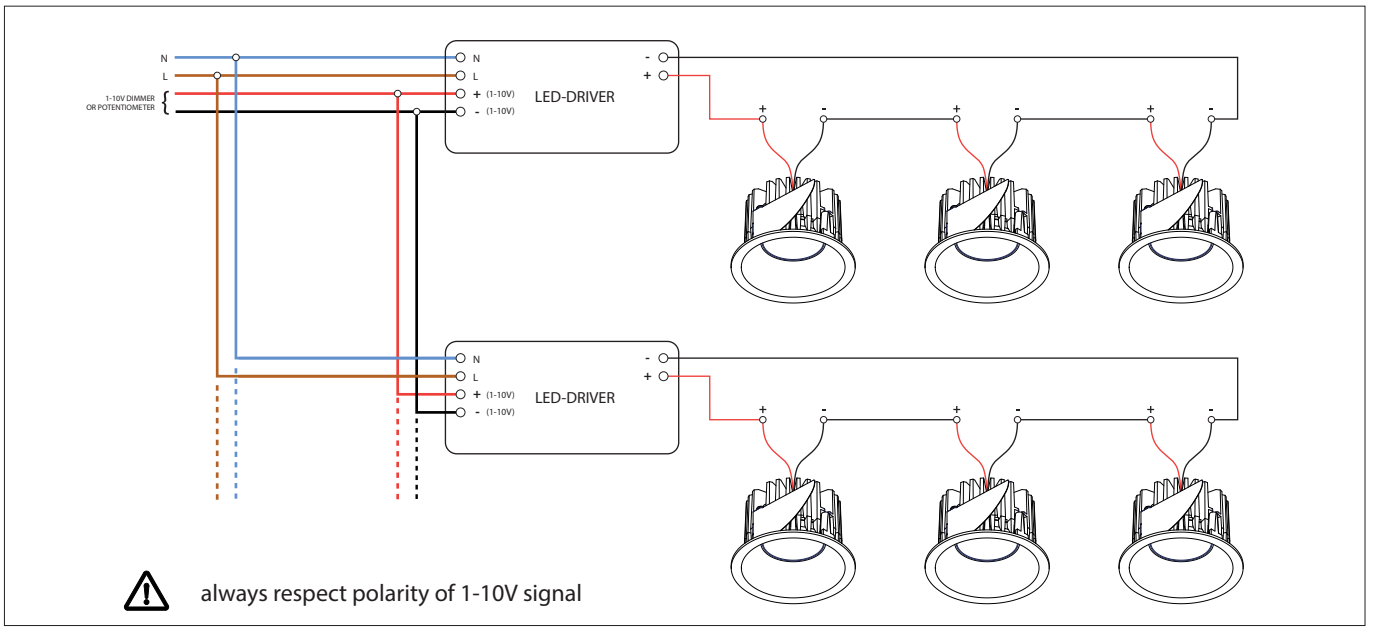

DALI

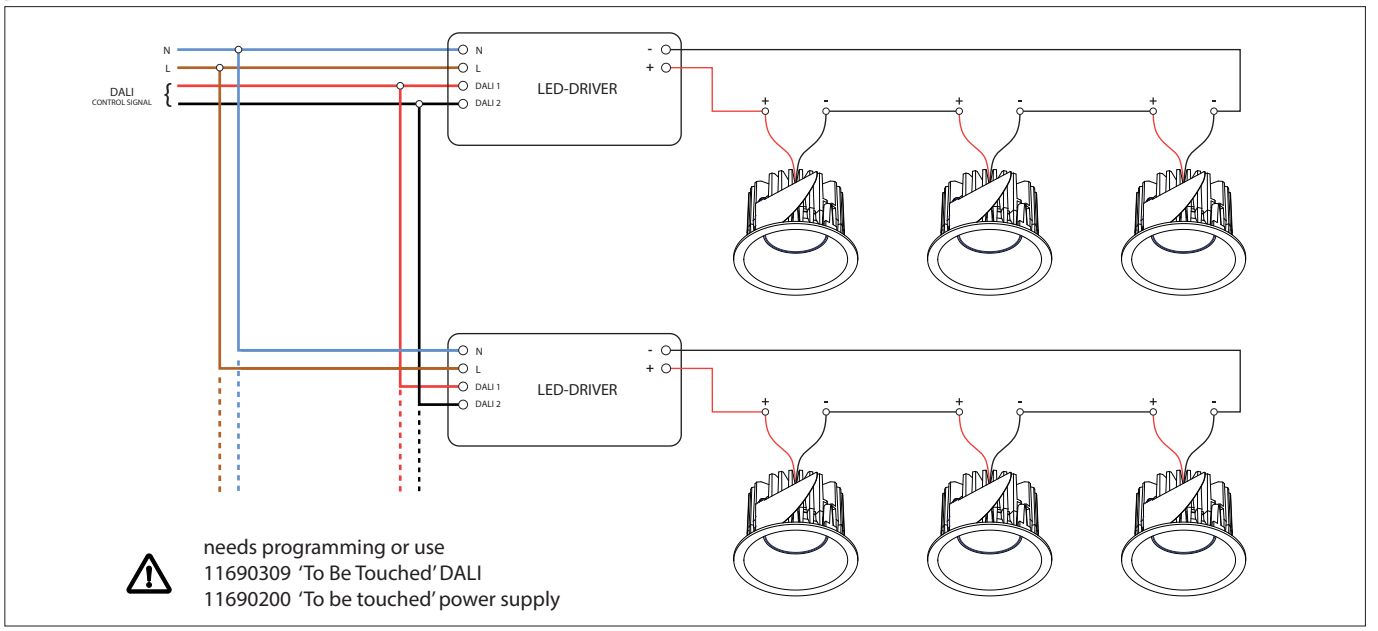

PUSH DIM - SINGLE DIM CHANNEL

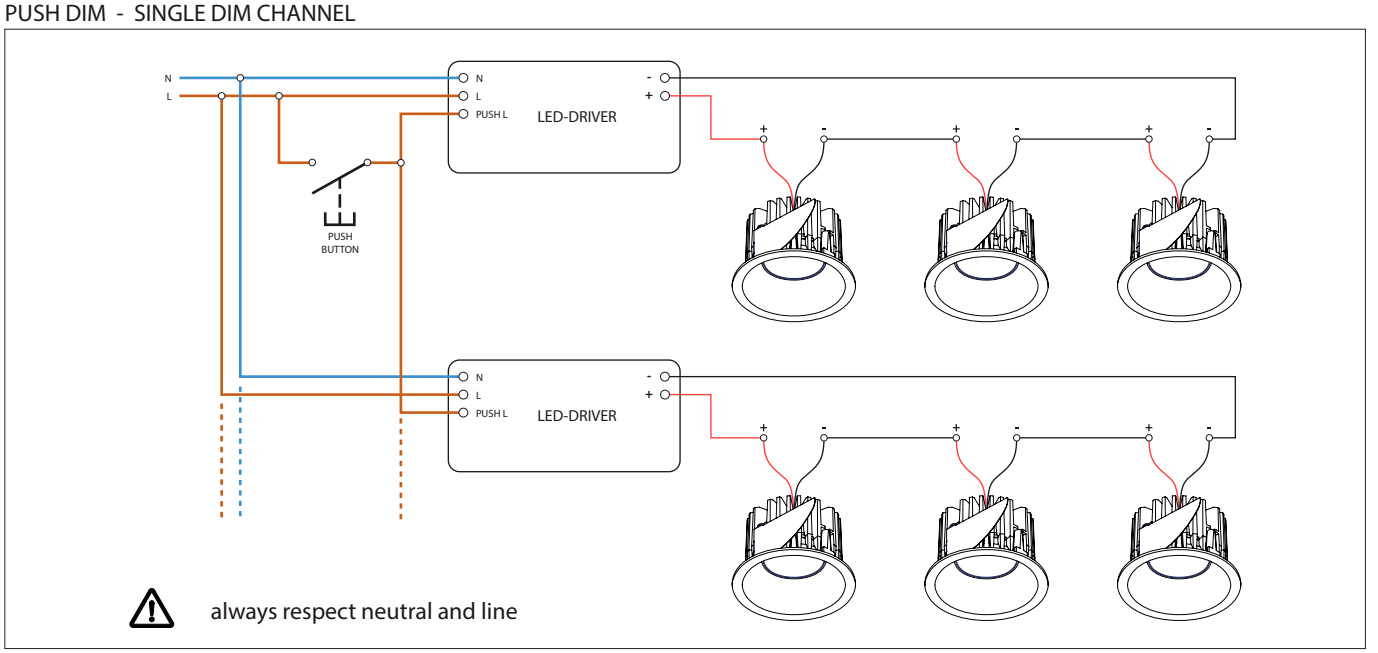

PUSH DIM - DOUBLE DIM CHANNEL

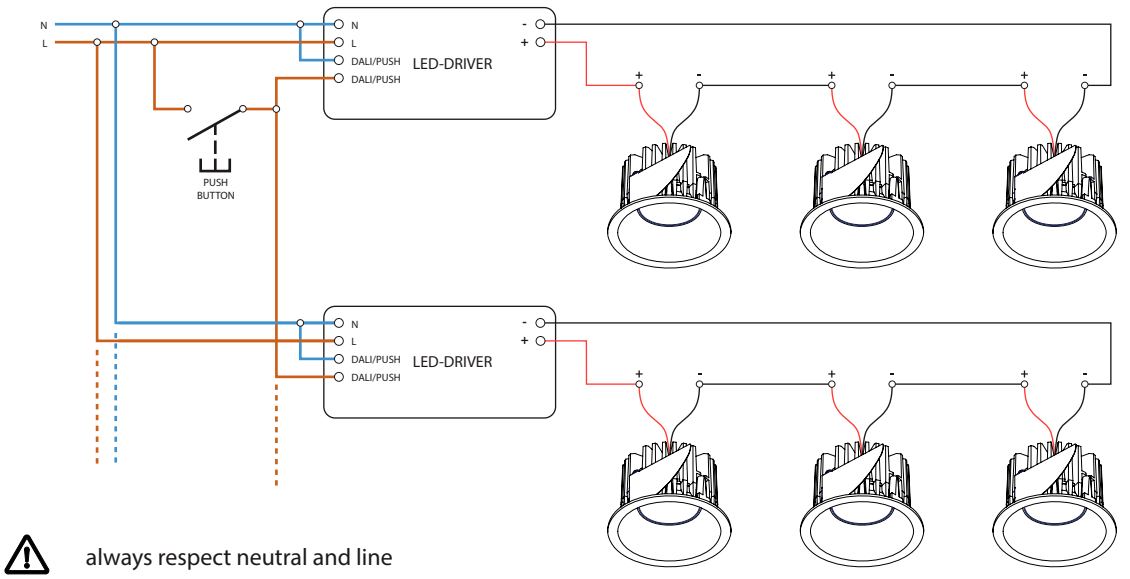

always respect neutral and line

PUSH DIM - MASTER SLAVE WITH SYNCHRONISATION CABLE

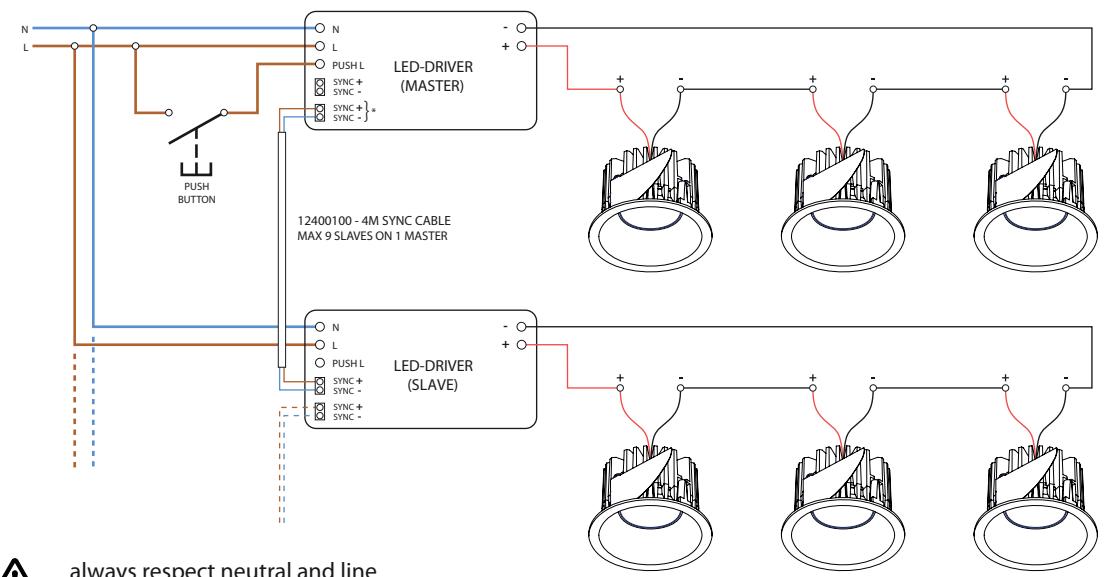

always respect neutral and line
do not connect 'PUSH L' on slave driver
* always use second sync clamp on master as shown on diagram

DEVICES

Description	**Modular connected 1-10v white component**	**Philips Hue bridge - EU**	**Philips Hue bridge - UK**
Article number	13190030	70000616	70000617
Power supply	198-253V AC / 50-60Hz	100–240 V AC / 50–60Hz	100–240 V AC / 50–60Hz
Power consumption	0.3W (stand-by)	3W	3W
IP	20	20	20
Lifetime	50k hours	30k hours	30k hours
Dimensions	127mm x 46mm x 32mm	88 mm x 88 mm x 26 mm	88 mm x 88 mm x 26 mm
Weight	0,09KG		
Range	12m		
Features	• connect up to 10 1-10V drivers (max. 400VA)	• connect up to 50 Modular connected 1-10V white components or bulbs and strips, and max. 12 controls	• connect up to 50 Modular connected 1-10V white components or bulbs and strips, and max. 12 controls

OPTIONAL CONTROLS

Description	**Philips Hue tap switch**	**Philips Hue dimmer switch**	**Philips Hue motion sensor**
Article number	70000615	70000614	70000847
Power supply	kinetic energy provided by your button touch	battery powered	battery powered
IP	20	20	42
Lifetime	50.000 clicks	50.000 clicks	
Dimensions	75mm x 25mm	115mm x 70mm x 14mm (wall plate) 92mm x 35m x 11mm (remote)	55mm x 55mm x 29mm
Range	15-30m (depending on local circumstances)	12m (depending on local circumstances)	5m (100-degree detection angle)
Features	• connect up to 25 tap switches to the bridge • 4 configurable buttons • Wall mountable	• connect up to 12 dimmer switches to the bridge	• connect up to 12 motion sensors to the bridge

BULBS & STRIPS

Description	**Philips Hue warm white E27 bulb**	**Philips Hue tunable white E27 bulb**	**Philips Hue RGBW E27 bulb**
Article number	70000611	70000620	70000612
Socket	E27	E27	E27
CCT (min - max.)	2700k	2200-6500K	2000-6500K
CRI	CRI 80+	CRI 80+	CRI 80+
Power supply	100–240 V AC / 50–60Hz	100–240 V AC / 50–60Hz	100–240 V AC / 50–60Hz
Power consumption	9.5W	9.5W	9W
Output (min - max.)	806lm	400-806lm	342-806lm
Dimmable / not dimmable	Dimmable	Dimmable	Dimmable
RGBW	no	no	yes
IP	20	20	20
Lifetime	25K hours	25K hours	25K hours

Description	**Philips Hue tunable white GU10 bulb**	**Philips Hue RGBW GU10 bulb**	**Philips Hue RGBW LED strip - 2m set**	**Philips Hue RGBW LED strip - 1m extension**
Article number	70000621	70000613	70000618	70000619
Socket	GU10	GU10	n/a	n/a
CCT (min - max.)	2200-6500K	2000-6500K	2200-6500K	2200-6500K
CRI	CRI 80+	CRI 80+	CRI 80+	CRI 80+
Power supply	100–240 V AC / 50–60Hz	100–240 V AC / 50–60Hz	100–240 V AC / 50–60Hz	100–240 V AC / 50–60Hz
Power consumption	5.5W	6.5W	10.25W/m	10.25W/m
Output (min - max.)	129-292lm	145-250lm	300-800lm/m	300-800lm/m
Dimmable / not dimmable	Dimmable	Dimmable	Dimmable	Dimmable
RGBW	no	yes	yes	yes
IP	20	20	20	20
Lifetime	25K hours	25K hours	20K hours	20K hours
Features			• including power adaptor • extendable up to 10 meter	

CONBOX / GYPKIT / RECESSED RING / FLANGE

WINK WITH FLANGE

CONBOX

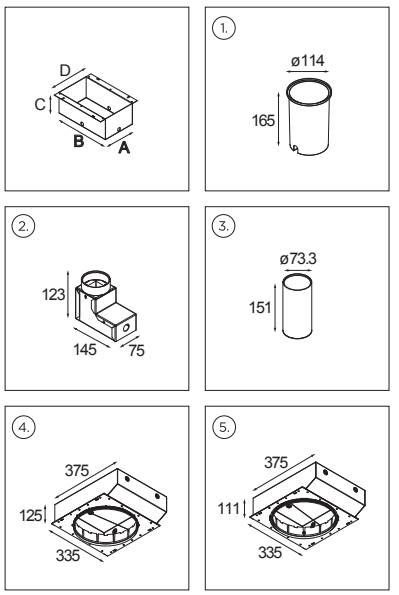

GYPKIT



RECESSED RING



FLANGE



CONBOX / GYPKIT / RECESSED RING / FLANGE

	CONBOX		GYPKIT		RECESSED RING	
	ref.	**dimensions AxBxCxD**	**ref.**	**dimensions AxBxCxD**	**ref.**	**dimensions ø - h**
Asy lotis 82 LED / MR16 / GU10	**10889830**	190x192x130x256	**12290830**	190x190 - ø76		
Asy lotis 97 adjustable LED / MR16 / GU10			**12290330**	190x190 - ø92		
Downut 350 TL5C	**11030330**	440x400x120x438	**11030430**	440x396 - ø352		
Duell 1x LED / MR16 / GU10	**10889830**	190x192x130x256	**12290930**	190x190 - 2x ø76		
Duell 2x LED / MR16 / GU10	**10889830**	190x192x130x256	**12290930**	190x190 - 2x ø76		
Hipy 110 LED	**12349830**	ø114 h 165 (1)				
Hipy 70 LED	**12379830**	75x145x123 (2)				
	12379630 (renovation conbox)	ø73.3 h 151 (3)				
K-0 80 MR16 / GU10	**10889830**	190x192x130x256	**12290130**	190x190 - ø70		
K-1 89 MR16 / GU10	**10889830**	190x192x130x256	**12290230**	190x190 - ø80		
K-2 80 MR16 / GU10	**10889830**	190x192x130x256	**12290130**	190x190 - ø70		
K-3 89 MR16 / GU10	**10889830**	190x192x130x256	**12290230**	190x190 - ø80		
K72 LED	**10490330**	112x172x100x236	**12291330**	170x112 - ø65		
K77 adjustable LED	**10889830**	190x192x130x256	**12290130**	190x190 - ø70		
Lotis 82 LED / MR16 / GU10	**10889830**	190x192x130x256	**12290830**	190x190 - ø76		
Lotis 86 IP55 LED / MR16 / GU10	**10889830**	190x192x130x256	**12290230**	190x190 - ø80		
Lotis 97 adjustable LED / MR16 / GU10	**10889830**	190x192x130x256	**12290330**	190x190 - ø92		
Médard ceiling recessed LED	**10490330**	112x172x100x236	**12291330**	170x112 - ø65		
Rector recessed LED	**10490330**	112x172x100x236	**12291330**	170x112 - ø65		
Scotty 270 adjustable LED	**11799730** (concrete finish)	375x335x125 (4)			**11799430**	ø288 h 125
	11799530 (plaster finish)	375x335x111 (5)				
Scotty 270 LED	**11799730** (concrete finish)	375x335x125 (4)			**11799430**	ø288 h 125
	11799530 (plaster finish)	375x335x111 (5)				
Slide IP54 LED	**10889830**	190x192x130x256	**12290330**	190x190 - ø92		
Smart cake / kup / lotis / asy lotis 48 LED	**10889530**	100x123x80x187	**12290730**	100x120 - ø45		
1x Smart cake / kup / lotis 82 LED / MR16 / GU10	**10889830**	190x192x130x256	**12290130**	190x190 - ø70	**12500230**	ø95 h 100
2x Smart cake / kup / lotis 82 LED / MR16 / GU10	**10889830**	190x192x130x256	**12291030**	190x190 - 2x ø70		
Smart cake / kup / lotis 115 LED / GU10	**10889830**	190x192x130x256	**12290530**	190x190 - ø108	**12810230**	ø127 h 100
Thub metal 215 1x AR111	**11029430**	300x300x185x338	**11029630**	300x338 - ø195		
Thub metal 215 2x AR111	**11029530**	300x445x185x338	**11029130**	445x338 - 2x ø195		

	FLANGE		
	ref.	**colour**	**dimensions ø - h**
Wink / Asy wink 115	**13073009**	white struc	ø133 h 100
	13073032	black struc	ø133 h 100

CONBOX / GYPKIT / RECESSED FRAME

MINI MULTIPLE

CONBOX

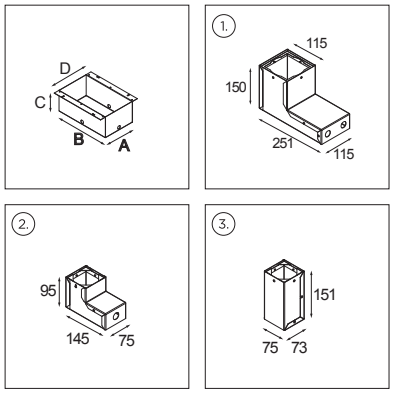

GYPKIT



RECESSED FRAME



CONBOX / GYPKIT / RECESSED FRAME

	CONBOX		GYPKIT		RECESSED FRAME	
	ref.	**dimensions AxBxCxD**	**ref.**	**dimensions AxBxCxD**	**ref.**	**dimensions AxBxCxD**
Flush gate 1x 18W	**10890530**	120x362x150x198				included with fixture
Flush gate 2x 18W	**10890630**	200x362x150x278				included with fixture
Flush gate 2x 36W	**10890730**	200x562x150x278				included with fixture
Flush gate 2x 55W	**10890830**	200x662x150x278				included with fixture
Hipy square 110x110 LED	**12349930**	115x251x150x115 (1)				
Hipy square 70x70 LED	**12379930**	75x145x95 (2)				
	12379730 (renovation conbox)	73x75x151 (3)				
Lotis square IP55 LED	**10889830**	190x192x130x256	**12291230**	190x190x84x84		
Lotis square LED	**10889830**	190x192x130x256	**12291130**	190x190x78x78		
Mini multiple trimless 1x	**10440130**	137x158x130x215			**10460130**	133.5x133.5x106x106
Mini multiple trimless 2x	**10440230**	237x158x130x315			**10460230**	233.5x133.5x206x106
Mini multiple trimless 3x	**10440730**	342x158x130x420			**10460330**	338.5x133.5x311x106
Mini multiple trimless 4x	**10440430**	237x258x130x315			**10460430**	233.5x233.5x206x206
Mini-multiple 1x	**10400130**	122x257x147x186	**10420130**	255x152x110x110		
Mini-multiple 2x	**10400230**	257x222x147x321	**10420230**	240x287x210x110		
Mini-multiple 3x	**10400330**	257x327x147x321	**10420330**	345x287x315x110		
Mini-multiple 4x	**10400430**	357x222x147x421	**10420430**	240x387x210x210		
Multiple 1x	**10390130**	183x312x122x247	**10410130**	310x212x170x170		
Multiple 2x	**10390230**	228x387x122x292	**10410230**	385x257x325x257		
Multiple 3x	**10390330**	228x532x122x292	**10410330**	530x257x470x170		
Multiple 4x	**10390430**	382x387x122x446	**10410430**	385x412x325x325		
Multiple trimless 1x	**10430130**	194x215x120x272			**10450130**	190.5x190.5x163x163
Multiple trimless 2x	**10430230**	349x215x120x427			**10450230**	345.5x190.5x318x163
Multiple trimless 3x	**10430330**	492x215x120x570			**10450330**	488.5x190.5x461x163
Multiple trimless 4x	**10430430**	349x370x120x427			**10450430**	345.5x345.5x318x318

TRACK SURFACE

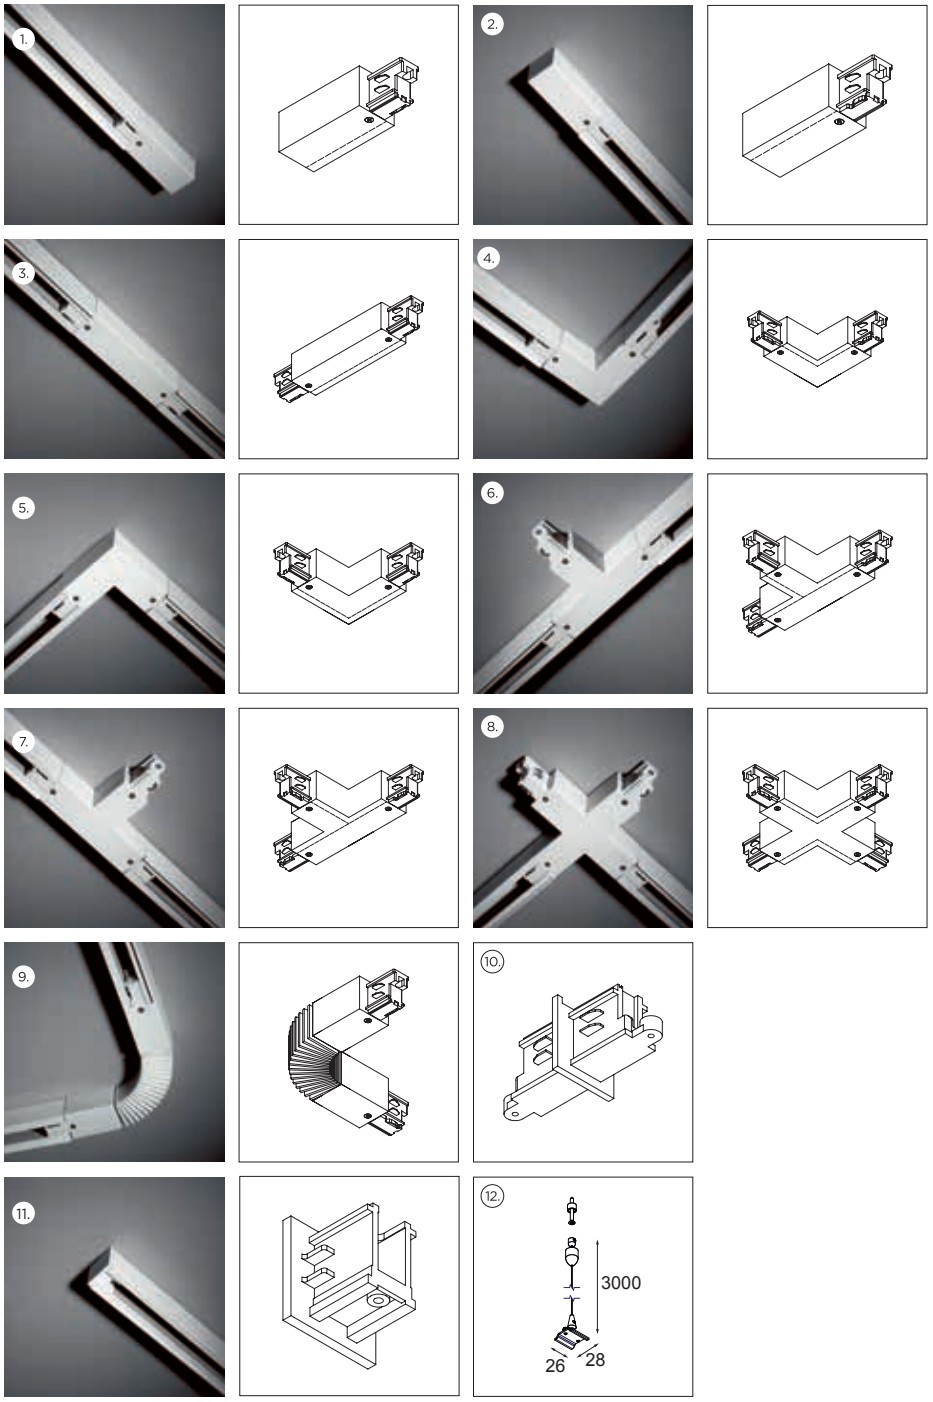

PROFILE	
11242201	PROFILE 1M WHITE SHINY
11242202	PROFILE 1M BLACK
11242205	PROFILE 1M ALU
11240101	PROFILE 2M WHITE SHINY
11240102	PROFILE 2M BLACK
11240105	PROFILE 2M ALU

POWER FEED RIGHT (1)	
11240501	POWER FEED RIGHT WHITE SHINY
11240502	POWER FEED RIGHT BLACK
11240505	POWER FEED RIGHT ALU

POWER FEED LEFT (2)	
11240601	POWER FEED LEFT WHITE SHINY
11240602	POWER FEED LEFT BLACK
11240605	POWER FEED LEFT ALU

CONNECTOR 180° (3)	
11240701	CONNECTOR 180° WHITE SHINY
11240702	CONNECTOR 180° BLACK
11240705	CONNECTOR 180° ALU

CONNECTOR 90° INSIDE (4)	
11240801	CONNECTOR 90° INSIDE WHITE SHINY
11240802	CONNECTOR 90° INSIDE BLACK
11240805	CONNECTOR 90° INSIDE ALU

CONNECTOR 90° OUTSIDE (5)	
11240901	CONNECTOR 90° OUTSIDE WHITE SHINY
11240902	CONNECTOR 90° OUTSIDE BLACK
11240905	CONNECTOR 90° OUTSIDE ALU

CONNECTOR T RIGHT (6)	
11241001	CONNECTOR T RIGHT WHITE SHINY
11241002	CONNECTOR T RIGHT BLACK
11241005	CONNECTOR T RIGHT ALU

CONNECTOR T LEFT (7)	
11241101	CONNECTOR T LEFT WHITE SHINY
11241102	CONNECTOR T LEFT BLACK
11241105	CONNECTOR T LEFT ALU

CONNECTOR X (8)	
11241201	CONNECTOR X WHITE SHINY
11241202	CONNECTOR X BLACK
11241205	CONNECTOR X ALU

CONNECTOR FLEXIBLE (9)	
11241301	CONNECTOR FLEXIBLE WHITE SHINY
11241302	CONNECTOR FLEXIBLE BLACK
11241305	CONNECTOR FLEXIBLE ALU

CONNECTOR INTERNAL (10)	
11241501	CONNECTOR INTERNAL WHITE SHINY
11241502	CONNECTOR INTERNAL BLACK
11241505	CONNECTOR INTERNAL ALU

ENDPLATE (11)	
11241401	ENDPLATE WHITE SHINY
11241402	ENDPLATE BLACK
11241405	ENDPLATE ALU

SUSPENSION KIT (12)	
11241801	SUSPENSION KIT 3M WHITE SHINY
11241802	SUSPENSION KIT 3M BLACK
11241805	SUSPENSION KIT 3M ALU

TRACK RECESSED

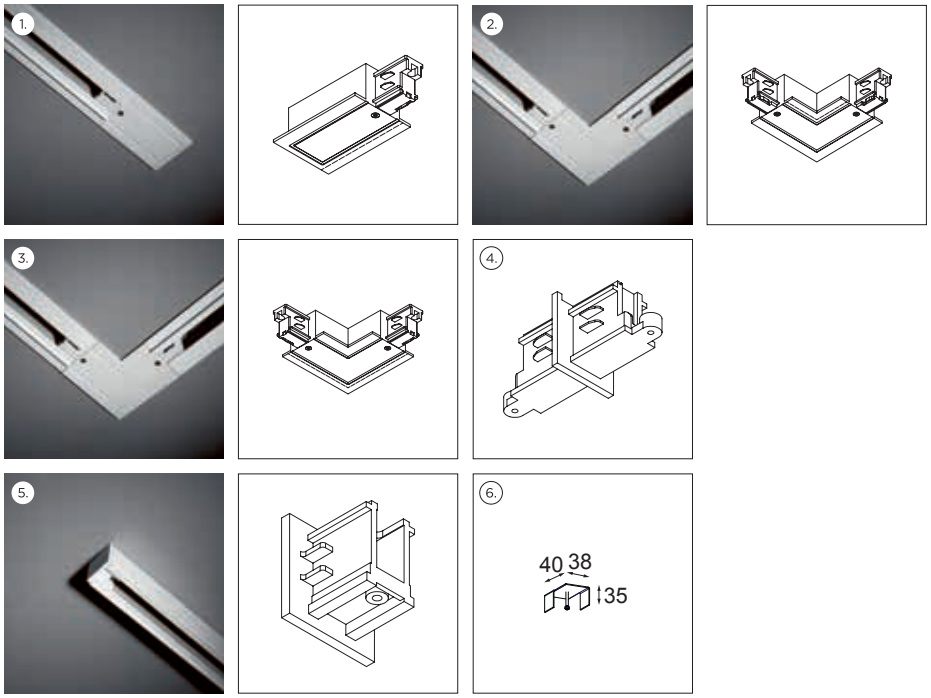

PROFILE	
11242401	PROFILE 1M WHITE SHINY
11242402	PROFILE 1M BLACK
11242405	PROFILE 1M ALU
11240301	PROFILE 2M WHITE SHINY
11240302	PROFILE 2M BLACK
11240305	PROFILE 2M ALU

POWER FEED (1)	
11241601	POWER FEED RIGHT WHITE SHINY
11241602	POWER FEED RIGHT BLACK
11241605	POWER FEED RIGHT ALU
11241701	POWER FEED LEFT WHITE SHINY
11241702	POWER FEED LEFT BLACK
11241705	POWER FEED LEFT ALU

CONNECTOR 90° INSIDE (2)	
11242001	CONNECTOR 90° INSIDE WHITE SHINY
11242002	CONNECTOR 90° INSIDE BLACK
11242005	CONNECTOR 90° INSIDE ALU

CONNECTOR 90° OUTSIDE (3)	
11242101	CONNECTOR 90° OUTSIDE WHITE SHINY
11242102	CONNECTOR 90° OUTSIDE BLACK
11242105	CONNECTOR 90° OUTSIDE ALU

CONNECTOR INTERNAL (4)	
11241501	CONNECTOR INTERNAL WHITE SHINY
11241502	CONNECTOR INTERNAL BLACK
11241505	CONNECTOR INTERNAL ALU

ENDPLATE (5)	
11241401	ENDPLATE WHITE SHINY
11241402	ENDPLATE BLACK
11241405	ENDPLATE ALU

MOUNTING BRACKET (6)	
11241930	MOUNTING BRACKET

CHAPEAU

FALSE CEILING / PLASTER FINISH



1. fix the cable with the strain relief
2. indicate the mounting hole in the ceiling using the supplied cardboard template; mark out two points opposite one another at the level of the notches in the template and connect these with a pencil line
3. cut the marked hole out of the ceiling
4. till the bracket into the hole and make sure the recesses in the bracket foot are aligned to the pencil lines
5. adjust the height of the clamping plates and tighten the screws
6. screw in the clamping plates from the bottom
7. plaster over the screw heads & paint
8. insert the driver into the hole and connect to power; power has to be switched off!
9. connect the driver to the fixture
10. attach the fixture to the ceiling bracket with the supplied screw

CHAPEAU TRIMLESS

FALSE CEILING / PLASTER FINISH



1. fix the cable with the strain relief
2. make a mounting hole in the ceiling according to the measurements provided
3. insert the mounting ring and bracket into the ceiling
4. adjust the clamping plates and tighten the screws
5. screw in the clamping plates from the bottom
6. plaster over the screw heads & paint + plaster between mounting ring and mounting hole
7. clean the innerside of the ring with fine sand paper
8. insert the driver into the access hole and connect to power; power has to be switched off!
9. connect the driver to the fixture
10. attach the fixture to the ceiling bracket with the supplied screw

DUELL RECESSED

FALSE CEILING



1. diameter 76 mm
2. drill hole (not trough)
3. measure second hole center (80mm between centers)
4. drill both holes through
5. cut out to oval form
6. install fixture

MINI MULTIPLE TRIMLESS

WITH CONBOX AND RECESSED FRAME - CONCRETE CEILING / PLASTER FINISH





1. pre installed conbox
2. insert the recessed frame into the conbox
3. adjust the recessed frame to the thickness of the plaster
4. plaster the ceiling & paint
5. connect the driver to the power feed (power switched off)
6. insert the fixture into the recessed frame; make sure that the openings of the fixture match up with the position of the springs in the recessed frame; insert the fixture until you hear a ‘click’

WITH RECESSED FRAME - FALSE CEILING / PLASTER FINISH



1. make a mounting hole in the ceiling according to the measurements provided
2. place the recessed frame into the ceiling
3. adjust the recessed frame until it is flush with the ceiling
4. turn screws through the perforated brackets of the recessed frame
5. plaster the ceiling and the heads of the screws & paint
6. connect the driver to the power feed (power switched off!)
7. insert the fixture into the recessed frame; make sure that the side openings of the fixture match up with the position of the springs in the recessed frame; insert the appliance until you hear a ‘click’

MULTIPLE

FALSE CEILING

1. cut out following the dimensions provided
2. turn the inside buttons counter clockwise to partially unfasten the fixation brackets
3. make electrical connection
4. push fixation brackets against the fixture
5. fasten the fixation brackets by turning the inside buttons clockwise

6 place lamps

WITH CONBOX AND RECESSED FRAME - CONCRETE CEILING / PLASTER FINISH



1 pre-installed Multiple conbox

2 fasten Multiple gypkit in front of the installed Multiple conbox

3 plaster

4 turn the inside buttons counter clockwise to partially unfasten the fixation brackets

5 make electrical connection

6 push fixation brackets against the fixture

7 fasten fixation brackets by turning the inside buttons clockwise

8 place lamps

MULTIPLE

WITH CONBOX AND GYPKIT - STALTON CEILING



1. cut out x&y following the dimensions provided
2. break inside ribs of the stalton ceiling
3. insert & fasten Multiple conbox
4. fasten Multiple gypkit in front of the installed Multiple conbox
5. plaster
6. turn the inside buttons counter clockwise to partially unfasten the fixation brackets
7. make electrical connection
8. push fixation brackets against the fixture
9. fasten the fixation brackets by turning the inside buttons clockwise
10. place lamps

MULTIPLE TRIMLESS

WITH RECESSED FRAME - FALSE CEILING/PLASTER FINISH



1. cut out following the dimensions provided
2. insert recessed frame
3. turn screws from the bottom through the perforated brackets of the recessed frame
4. adjust recessed frame until it is flush with the ceiling
5. plaster & paint

6 electrical connection

7 use the inside buttons to fix the multiple trimless to the recessed frame (left side)

8 use the inside buttons to fix the multiple trimless to the recessed frame (right side)

9 place lamps

WITH CONBOX AND RECESSED FRAME - CONCRETE CEILING / PLASTER FINISH

1 pre-installed Multiple trimless conbox

2 install the recessed frame in the Multiple trimless conbox and adjust according to the thickness of the plaster

3 plaster

4 electrical connection

5 use the inside buttons to fix the Multiple trimless to the recessed frame (left side)

6 use the inside buttons to fix the Multiple trimless to the recessed frame (right side)

7 place lamps

MULTIPLE TRIMLESS

WITH CONBOX AND RECESSED FRAME - STALTON CEILING/PLASTER FINISH

1. break inside ribs of the stalton ceiling
2. insert & fasten Multiple trimless conbox
3. install & adjust recessed frame to the thickness of the plaster
4. plaster
5. make electrical connection
6. use the inside buttons to fix the multiple trimless to the recessed frame (left side)

7 use the inside buttons to fix the multiple trimless to the recessed frame (right side)

8 place lamps

WITHOUT RECESSED FRAME - FALSE CEILING/PLASTER FINISH



1 cut out x&y

2 insert in hole

3 use paste to fix (no screws)

4 adjust height = flush

5 place lamps

SCOTTY

FALSE CEILING



1. make a mounting hole in the ceiling according to the measurements provided
2. you don't need the 4 leaf springs in this type of installation; bend them over to the inside of the luminaire
3. connect the driver to the power supply; afterwards, connect the fixture to the driver; power has to be switched off!
4. put the torsion springs in a vertical position and place the fixture in the hole and let the springs pull the fixture up into the opening of the ceiling

SCOTTY TRIMLESS

WITH CONBOX (RECESSED RING INCL.) - CONCRETE CEILING/CONCRETE FINISH

1. pre installed conbox
2. remove the inner ring
3. loop the safety cable through the 3 holes in the fixture
4. connect the driver to the power supply; afterwards, connect the fixture to the driver; power has to be switched off!
5. click the fixture into the installed ring

SCOTTY TRIMLESS

WITH CONBOX (RECESSED RING INCL.) - CONCRETE CEILING/PLASTER FINISH



1. pre installed conbox
2. adjust the ring to the correct height using the 4 screws
3. finish off the top with a coat of plaster; wipe off excess up to the ring
4. paint the top
5. remove the inner ring
6. clean the innerside of the ring with fine sand paper
7. loop the safety cable through the 3 holes in the fixture
8. connect the driver to the power supply; afterwards connect the fixture to the driver; power has to be switched off!
9. click the fixture into the installed ring

WITH RECESSED RING - FALSE CEILING/PLASTER FINISH



1. make a mounting hole in the ceiling according to the measurements provided
2. insert the ring through the hole
3. adjust the height of the ring by loosening/ tightening the clamping plates
4. screw in the clamping plates from the bottom
5. plaster the ceiling
6. remove the inner ring
7. clean the innerside of the ring with fine sand paper
8. loop the safety cable through the 3 holes in the fixture
9. connect the driver to the power supply; afterwards connect the fixture to the driver; power has to be switched off!
10. click the fixture into the installed ring

SLIDE IP54 LED RG

FALSE CEILING



1. drill the provided hole
2. connect driver to power supply
3. connect the socket wires to the driver
4. install the luminaire in the ceiling

STOVE GE

WITH GEAR ACCESS COVER PLATE – FALSE CEILING/PLASTER FINISH

1. cut out of the ceiling the diameter mentioned on the installation leaflet
2. insert the recessed ring
3. adjust height and fix the 2 screws for locking the position
4. screw in the clamping plates from the bottom
5. plaster over the screw heads, paint the ceiling, clean the innerside of the ring with fine sandpaper
6. insert driver into the access hole and connect to power; power has to be switched off!
7. pull the secondary wires through the ceiling opening, attach the baseplate to the ceiling
8. use the supplied connector for power connection
9. connect the power feed (power switched off)
10. attach fixture to the mounting ring with the two screws at base
11. close the access hole for ballast with the supplied cover

STOVE GI

1. pull the electricity cable through the ceiling opening and attach the baseplate to the ceiling
2. connect the fixture to the power feed
3. the connector fits into the “side arm” of the fixture
4. attach the fixture to the baseplate with the two screws at base

SMART 82/115

FALSE CEILING



1. make sure power is disconnected
   drill the correct hole
2. connect the driver to power
   connect the fixture to the remote gear
3. insert the spot in the ceiling and twist
   clockwise to fix it

WITH RECESSED RING - FALSE CEILING / PLASTER FINISH









1. make sure power is disconnected
   drill the correct hole
2. insert the recessed ring into the hole
3. screw in the clamping plates from the bottom
4. adjust the heighth of the recessed ring by
   loosing/tightening the clamping plates
5. plaster the ceiling & the head of the screws
6. paint the ceiling;
   carefully clean the innerside of the ring
   with fine sandpaper
7. connect the powerfeed to the remote gear
   connect the fixture to the remote gear
8. insert the fixture into the recessed ring and
   twist clockwise to fix it

SMART 82/115

WITH SMART MASK - FALSE CEILING

1. make sure power is disconnected.
   drill the correct holes (88 mm between centers)
2. insert the spot in the mask and connect to the remote gear;
   connect the powerfeed to the remote gear
3. insert the connected spot in the ceiling and twist clockwise so that the mask is clamped between the ceiling and the spot
   connect now the second spot
4. insert the spot in the ceiling and twist clockwise to fix it

WITH SMART SURFACE BOX GI

1. make sure power is disconnected
   connect the powerfeed to the gear
2. attach the surface box to the ceiling
3. insert the connected spot in the ceiling and twist clockwise so that the mask is clamped between the ceiling and the spot
   connect now the second spot
4. connect the spot with the gear, insert the spot in the mask and fix it in the surface box clockwise

SMART 82/115

WITH SMART SURFACE TUBED GI





1. make sure power is disconnected
   attach the base plate to the ceiling
2. pull the electricity through the baseplate and
   connect the powerfeed to the gear
3. insert the spot into the tube
   twist clockwise to fix it
4. connect the spot to the gear
5. click the tube on the base plate

REKTOR RECESSED

FALSE CEILING

1. make sure power is disconnected
   drill the correct hole
2. connect the fixture to the remote gear
3. insert the leafsprings into the ceiling and
   twist clockwise to fix it

PRODUCT	PAGE
(small) 2Flat2C	612
2Flat2C suspended TL5 bap up/down GI	383
2Flat2C suspended TL5 poly up/down / AR111 down GI	383
2Flat2C suspended TL5 poly up/down GI	383
A(r)mor IP67 LED GI	461
A(r)mor double IP67 LED GI	461
Asy lotis 82 GU10	116
Asy lotis 82 LED retrofit	115
Asy lotis 82 MR16 GE	116
Asy lotis 82 for LED GE	115
Asy lotis 97 adjustable GU10	117
Asy lotis 97 adjustable MR16 GE	117
Asy lotis 97 adjustable for LED GE	116
Baseline	532
Bolster foot AR111 GI	20
Bolster foot GU10	20
Bolster foot for LED GU10 AR111	20
Bolster recessed 155 AR111 GE	22
Bolster recessed 155 GU10	22
Bolster recessed 155 for LED GU10 AR111	22
Bolster suspension GU10	19
Bolster suspension LED retrofit	19
Bolster track AR111 GI	21
Bolster track GU10	21
Bolster track for LED GU10 AR111	21
Buzze IP54 LED GI	465
Chapeau 206 LED GE	31
Chapeau trimless 222 LED GE	31
Downut 350 TL5C GI	37
Downut flange 292 TL5C GI	37
Downut flange 367 TL5C GI	38
Doze 80 ceiling LED	41
Doze 80 wall LED	389
Doze square ceiling LED	41
Doze square wall LED	389
Drupl70	534
Duell recessed 1x GU10	45
Duell recessed 1x LED GE	44
Duell recessed 1x LED RG	44
Duell recessed 1x MR16 GE	45
Duell recessed 2x GU10	46
Duell recessed 2x LED GE	45
Duell recessed 2x LED RG	46
Duell recessed 2x MR16 GE	46
Duell surface 1x GU10	43
Duell surface 1x LED GI	43
Duell surface 1x MR16 GI	43
Duell wall 1x R7s	394
Duell wall IP44 2x LED GI	469
Duell wall IP44 LED GI	393
Duell wall LED 500lm	393
Duell wall LED 900lm GI	393
Fall 1.1 IP54 LED GI	473
Fall 1.2 IP54 LED GI	473
Fall 1.3 IP54 LED GI	473
Flat moon 450 ceiling down LED GI	53
Flat moon 450 suspension down LED GI	53
Flat moon 450 suspension up/down LED GI	54
Flat moon 470 recessed LED GI	62
Flat moon 480 wall TL5 GI	403
Flat moon 480 wall backlit TL5 GI	403
Flat moon 650 ceiling down LED GI	56
Flat moon 650 suspension down LED GI	56
Flat moon 650 suspension up/down LED GI	57
Flat moon 670 recessed LED GI	62
Flat moon 950 ceiling down LED GI	60
Flat moon 950 suspension down LED GI	60
Flat moon 950 suspension up/down LED GI	61
Flat moon 970 recessed LED GI	63
Flush gate 1x TC-L 18W GI	69
Flush gate 2x TC-L 18W GI	69
Flush gate 2x TC-L 36W GI	69
Flush gate 2x TC-L 55W GI	70
Freeway	544

PRODUCT	PAGE
Fuser double IP54 4x 21W GI	407,475
Fuser single IP54 2x 21W GI	407,475
George IP54 GU10	479
Gutter IP55 LED GI	483
H2A	546
H55	548
H55 RM suspended up/down GI	73
Halfpipe	554
Haloscan 179 for LED GE	75
Hipy 70 IP67 LED GE	485
Hipy 70 anti glare IP67 LED GE	485
Hipy 110 IP67 LED GE	486
Hipy 110 anti glare IP67 LED GE	486
Hipy 110 asy IP67 LED GE	487
Hipy square 70x70 IP67 LED GE	485
Hipy square 70x70 anti glare IP67 LED GE	486
Hipy square 110x110 IP67 LED GE	487
Hipy square 110x110 anti glare IP67 LED GE	487
Hipy square 110x110 asy IP67 LED GE	488
Hit-me IP55 TL5 GI	493
Izar LED GI	77
Izar TC-L GI	78
Julien round IP54 LED GE	495
Julien round foot IP54 LED GI	495
Julien square IP54 LED GE	499
Julien square foot IP54 LED GI	499
K -0 80 GU10	85
K -0 80 MR16 GE	85
K -1 89 GU10	85
K -1 89 MR16 GE	86
K -2 80 GU10	86
K -2 80 MR16 GE	86
K -3 89 GU10	87
K -3 89 MR16 GE	87
K72 IP54 LED GE	81
K72 IP54 LED RG	81
K77 adjustable LED GE	83
K77 adjustable LED RG	83
Kabaz floor IP44 E27	504
Kabaz floor IP44 LED	504
Kabaz wall IP44 E27	503
Kabaz wall IP44 LED	503
Kanon track 110 LED GI	89
Kanon track 138 LED GI	89
Kurk 178 IP40 LED GE	99
Kurk 178 IP40 LED RG	99
Kurk surface IP40 LED GE	97
Kurk surface IP40 LED GI	97
Lotis 82 GU10	106
Lotis 82 LED retrofit	105
Lotis 82 MR16 GE	106
Lotis 82 concrete GU10	107
Lotis 82 concrete MR16 GE	107
Lotis 82 concrete for LED GE	106
Lotis 82 for LED GE	105
Lotis 86 IP55 GU10	108
Lotis 86 IP55 LED retrofit	108
Lotis 86 IP55 MR16 GE	108
Lotis 86 IP55 for LED GE	107
Lotis 97 adjustable GU10	110
Lotis 97 adjustable MR16 GE	109
Lotis 97 adjustable for LED GE	109
Lotis 97 concrete adjustable GU10	111
Lotis 97 concrete adjustable MR16 GE	110
Lotis 97 concrete adjustable for LED GE	110
Lotis 230 AR111 GE	111
Lotis 290 TC-D 26/32W	111
Lotis square GU10	124
Lotis square IP55 GU10	125
Lotis square IP55 MR16 GE	124
Lotis square IP55 for LED GE	123
Lotis square MR16 GE	124
Lotis square for LED GE	123
Lotis tubed surface GU10	129

PRODUCT	PAGE
Lotis tubed surface IP44 LED retrofit	507
Lotis tubed surface LED retrofit	129
Lotis tubed surface MR16 GE	129
Lotis tubed suspension GU10	130
Lotis tubed suspension LED retrofit	130
Lotis tubed wall 1x GU10	411
Lotis tubed wall 1x LED retrofit	411
Lotis tubed wall 2x GU10	412
Lotis tubed wall 2x LED retrofit	412
Lowie IP54 1x LED GI	509
Lowie IP54 2x LED GI	509
Lowieze high IP54 1x LED GI	511
Lowieze high IP54 2x LED GI	511
Lowieze low IP54 1x LED GI	511
Lowieze low IP54 2x LED GI	511
M-LED 50 GE	140
M-LED 70 GE	139
M-LED 111 GE	139
Marbul 1x LED GI	143
Marbul 2x LED GI	144
Marcel 1x LED GE	151
Marcel 2x LED GE	151
Marcel 3x LED GE	152
Marty LED GE	417
Mini multiple 1x GU10	176
Mini multiple 1x LED retrofit	174
Mini multiple 1x MR16 GE	175
Mini multiple 2x GU10	176
Mini multiple 2x LED retrofit	174
Mini multiple 2x MR16 GE	175
Mini multiple 3x GU10	176
Mini multiple 3x LED retrofit	174
Mini multiple 3x MR16 GE	175
Mini multiple 4x GU10	176
Mini multiple 4x LED retrofit	174
Mini multiple 4x MR16 GE	175
Mini multiple for 1x LED GE	171
Mini multiple for 2x LED GE	171
Mini multiple for 3x LED GE	172
Mini multiple for 4x LED GE	172
Mini multiple for Smart rings 1x LED GE	178
Mini multiple for Smart rings 2x LED GE	178
Mini multiple for Smart rings 3x LED GE	179
Mini multiple for Smart rings 4x LED GE	179
Mini multiple trimless 1x GU10	188
Mini multiple trimless 1x LED retrofit	186
Mini multiple trimless 1x MR16 GE	187
Mini multiple trimless 2x GU10	188
Mini multiple trimless 2x LED retrofit	186
Mini multiple trimless 2x MR16 GE	187
Mini multiple trimless 3x GU10	188
Mini multiple trimless 3x LED retrofit	186
Mini multiple trimless 3x MR16 GE	187
Mini multiple trimless 4x GU10	188
Mini multiple trimless 4x LED retrofit	186
Mini multiple trimless 4x MR16 GE	187
Mini multiple trimless for 1x LED GE	184
Mini multiple trimless for 2x LED GE	184
Mini multiple trimless for 3x LED GE	185
Mini multiple trimless for 4x LED GE	185
Mini multiple trimless for Smart rings 1x LED GE	188
Mini multiple trimless for Smart rings 2x LED GE	188
Mini multiple trimless for Smart rings 3x LED GE	189
Mini multiple trimless for Smart rings 4x LED GE	189
MO6	556
MP78	560
Multiple 1x AR111 GE	197
Multiple 2x AR111 GE	197
Multiple 3x AR111 GE	197
Multiple 4x AR111 GE	197
Multiple for 1x LED GE	193
Multiple for 2x LED GE	193
Multiple for 3x LED GE	194
Multiple for 4x LED GE	194

PRODUCT	PAGE
Multiple trimless 1x AR111 GE	201
Multiple trimless 2x AR111 GE	201
Multiple trimless 3x AR111 GE	201
Multiple trimless 4x AR111 GE	201
Multiple trimless for 1x LED GE	198
Multiple trimless for 2x LED GE	198
Multiple trimless for 3x LED GE	199
Multiple trimless for 4x LED GE	199
Médard LED retrofit	162
Médard ceiling LED GI	161
Médard ceiling recessed LED GE	161
Médard track LED GI	162
Nomad 2x AR111 GE	212
Nomad 2x AR111 GI	213
Nomad 2x GU10	210
Nomad 2x PAR30	211
Nomad 4x AR111 GE	212
Nomad 4x AR111 GI	213
Nomad 4x GU10	210
Nomad 4x PAR30	211
Nomad 111 2x LED GE	209
Nomad 111 4x LED GE	209
Nomad XYZ 4x AR111 2xGI	213
Nomad linestra short S14d	419
Nomad minimal short E27	421
Nomad minimal tall E27	217
Nomad minimal ultra short E27	421
Nude wall 1x LED retrofit	425
Nude wall 1x PAR20	425
Nude wall 1x PAR30	425
Nude wall 2x LED retrofit	425
Nude wall 2x PAR20	426
Nude wall 2x PAR30	426
Nude wall IP55 1x LED GI	515
Nude wall IP55 2x LED GI	515
Nukav LED	429
Portfolio 0.1 IP54 LED	519
Portfolio 0.2 IP54 LED	519
Rektor LED GI	219
Rektor recessed LED GE	221
Scotty 270 LED GE	229
Scotty 270 adjustable LED GE	229
Semih LED GI	233
Single round LED GI	241
Single square LED GI	247
Single square track AR111 GI	247
Single square track CDM-TC 35W GI	248
Single square track CDM-TC 70W GI	248
Skifv high IP54 LED GI	523
Skifv low IP54 LED GI	523
SLD50	566
SL75	584
SL75 RM 1192mm surface mounted TL5 continuous poly down GI	253
SL75 RM 1192mm suspended TL5 continuous poly down GI	253
SL75 RM 1968mm surface mounted TL5 continuous poly down GI	253
SL75 RM 1968mm suspended TL5 continuous poly down GI	253
SLD75	578
SL100	586
SL149	590
SL micro	594
SL mini naked	598
SL mini naked surface mounted TL5 SLS down GI (1207mm)	255
SL mini naked surface mounted TL5 SLS down GI (1793mm)	255
SL mini naked suspended TL5 SLS down GI (1207mm)	255
SL mini naked suspended TL5 SLS down GI (1793mm)	255
SL mini poly in	602
SL mini poly in surface mounted TL5 continuous down GI (1207mm)	257
SL mini poly in surface mounted TL5 continuous down GI (1793mm)	257
SL mini poly in suspended TL5 continuous down GI (1207mm)	257
SL mini poly in suspended TL5 continuous down GI (1793mm)	257
SL mini poly out	606
SL mini poly out surface mounted TL5 continuous down GI (1207mm)	259
SL mini poly out surface mounted TL5 continuous down GI (1793mm)	259
SL mini poly out suspended TL5 continuous down GI (1207mm)	259
SL mini poly out suspended TL5 continuous down GI (1793mm)	259
SL nano poly out	608
Slide IP54 LED GE	261
Slide IP54 LED RG	261
Smart asy lotis 48 IP54 LED GE	305
Smart asy lotis 48 LED GE	305
Smart cake 48 IP54 LED GE	265
Smart cake 48 LED GE	265
Smart cake 82 GU10	268
Smart cake 82 IP54 LED GE	267
Smart cake 82 IP54 LED warm dim GE	267
Smart cake 82 LED GE	266
Smart cake 82 LED warm dim GE	266
Smart cake 82 MR16 GE	268
Smart cake 115 IP54 LED GE	269
Smart cake 115 LED GE	269
Smart cake 115 adjustable GU10	271
Smart cake 115 adjustable LED GE	270
Smart cake 115 adjustable LED warm dim GE	271
Smart cake 115 diffuse IP54 LED GE	270
Smart cake 160 IP54 LED GE	272
Smart cake 160 diffuse IP54 LED GE	272
Smart kup 48 IP54 LED GE	281
Smart kup 48 LED GE	281
Smart kup 82 GU10	284
Smart kup 82 IP54 LED GE	283
Smart kup 82 IP54 LED warm dim GE	283
Smart kup 82 LED GE	282
Smart kup 82 LED warm dim GE	282
Smart kup 82 MR16 GE	284
Smart kup 115 IP54 LED GE	285
Smart kup 115 LED GE	285
Smart kup 115 adjustable GU10	287
Smart kup 115 adjustable LED GE	286
Smart kup 115 adjustable LED warm dim GE	287
Smart kup 115 diffuse IP54 LED GE	286
Smart kup 160 IP54 LED GE	288
Smart kup 160 diffuse IP54 LED GE	288
Smart lotis 48 IP54 LED GE	303
Smart lotis 48 LED GE	303
Smart lotis 82 GU10	308
Smart lotis 82 IP54 LED GE	307
Smart lotis 82 IP54 LED warm dim GE	307
Smart lotis 82 LED GE	306
Smart lotis 82 LED warm dim GE	306
Smart lotis 82 MR16 GE	308
Smart lotis 115 IP54 LED GE	309
Smart lotis 115 LED GE	309
Smart lotis 115 adjustable GU10	311
Smart lotis 115 adjustable LED GE	310
Smart lotis 115 adjustable LED warm dim GE	311
Smart lotis 115 diffuse IP54 LED GE	310
Smart lotis 160 IP54 LED GE	312
Smart lotis 160 diffuse IP54 LED GE	312
Soufflé suspension down LED GI	325
Spektra track LED 2700K 15° - 55° GI	329
Split large LED	433
Split medium LED	433
Split small LED	433
Spock foot LED GI	335
Spock track LED GI	335
Spock wall LED GI	439
Stove LED GE	339
Stove LED GI	339
Stove track LED GI	340
Sulfer LED GI	443
Sulfer LED IP67 GI	443,527
Thub metal 215 1x AR111 GE	345
Thub metal 215 2x AR111 GE	345
Trapz 1x R7s	449
Trapz LED	449
United 1x 21/39W GI	349
United 1x 28/54W GI	349
United 2x 21/39W GI	350
United 2x 28/54W GI	350
United asy 1x 21/39W GI	357
United asy 1x 28/54W GI	357
United asy uncovered 1x 21/39W GI	358
United asy uncovered 1x 28/54W GI	358
United uncovered 1x 21/39W GI	351
United uncovered 1x 28/54W GI	351
United uncovered 2x 21/39W GI	352
United uncovered 2x 28/54W GI	352
U shape 2x MR16 GI	361
U shape suspended TL5 GI	361
Vaeder LED GI	363
Vaeder suspension (power feed recessed) LED GI	364
Vaeder suspension (power feed surface) LED GI	363
Wink 115 LED GE	374
Wink asy 115 LED GE	373
Wink asy 115 LED spreadlight GE	373
Wollet OLED GI	453

ARTICLE	PAGE
10200902	212
10200905	212
10200909	212
10201002	212
10201005	212
10201009	212
10201102	213
10201105	213
10201109	213
10201302	213
10201305	213
10201309	213
10201505	211
10201509	211
10201605	211
10201609	211
10202102	210
10202105	210
10202202	210
10202205	210
10202505	213
10203105	419
10203109	419
10203305	421
10203405	421
10203505	217
10270001	85
10270002	85
10270005	85
10270101	86
10270102	86
10270105	86
10270201	86
10270202	86
10270205	86
10270301	87
10270302	87
10270305	87
10274801	85
10274802	85
10274805	85
10274901	85
10274902	85
10274905	85
10275202	86
10275205	86
10275209	86
10275302	87
10275305	87
10275309	87
10303002	75
10303009	75
10350105	197
10350109	197
10350205	197
10350209	197
10350305	197
10350309	197
10350405	197
10350409	197
10351205	176
10351209	176
10351229	176
10351305	176
10351309	176
10351405	176
10351409	176
10351505	176
10351509	176
10360102	201
10360109	201
10360202	201
10360209	201
10360302	201
10360309	201
10360402	201
10360409	201
10370705	175
10370709	175
10370805	175
10370809	175
10370905	175
10370909	175
10371005	175
10371009	175
10371029	175
10380702	187
10380709	187
10380802	187
10380809	187
10381002	187
10381009	187
10381029	187
10382002	187
10382009	187
10486109	261
10486174	261
10486309	261
10486374	261
10486509	261
10486574	261
10486709	261
10486774	261
10731208	495
10731222	495
10731308	495
10731322	495
10732208	499
10732222	499
10732308	499
10732322	499
10880102	106
10880105	106
10880109	106
10880146	106
10880202	111
10880205	111
10880209	111
10880502	116
10880505	116
10880509	116
10880602	116
10880605	116
10880609	116
10881002	106
10881005	106
10881009	106
10881046	106
10881202	109
10881205	109
10881209	109
10881302	110
10881305	110
10881309	110
10881402	117
10881405	117
10881409	117
10881502	117
10881505	117
10881509	117
10881602	111
10881605	111
10881609	111
10882909	129
10882929	129
10882932	129
10882937	129
10882989	129
10883009	129
10883029	129
10883032	129
10883037	129
10883089	129
10883109	130
10883129	130
10883132	130
10883137	130
10883189	130
10883409	130
10883429	130
10883432	130
10883437	130
10883489	130
10883508	108
10883528	108
10883538	108
10883608	108
10883628	108
10883638	108
10883709	412
10883729	412
10883732	412
10883737	412
10883789	412
10883809	411
10883829	411
10883832	411
10883837	411
10883889	411
10890101	69
10890201	69
10890301	69
10890401	70
10895101	69
10895201	69
10895301	69
10895401	70
10920709	425
10920724	425
10920809	426
10920824	426
10921009	425
10921024	425
10921109	426
10921124	426
10922109	425
10922124	425
10922209	425
10922224	425
10923009	515
10923024	515
10923032	515
10923109	515
10923124	515
10923132	515
10940119	493
11021009	345
11022009	345
11030109	37
11030209	38
11030709	37
11035109	37
11035209	38
11035709	37
11036109	37
11036209	38
11036709	37
11037709	37
11050207	21
11050209	21
11050232	21
11050307	20
11050309	20
11050332	20
11050407	22
11050409	22
11050432	22
11050807	19
11050809	19
11050832	19
11051507	21
11051509	21
11051532	21
11051607	20
11051609	20
11051632	20
11051707	22
11051709	22
11051732	22
11051807	19
11051809	19
11051832	19
11052007	21
11052009	21
11052032	21
11052107	20
11052109	20
11052132	20
11052207	22
11052209	22
11052232	22
11070209	43
11070232	43
11070429	45
11070439	45
11070489	45
11070529	46
11070539	46
11070589	46
11070609	394
11070632	394
11070709	43
11070732	43
11070829	45
11070839	45
11070889	45
11070929	46
11070939	46
11070989	46
11071109	393,469
11071132	393,469
11071209	393,469
11071232	393,469
11071329	44
11071339	44
11071389	44
11071429	44
11071439	44
11071489	44
11071529	44
11071539	44
11071589	44
11071629	44
11071639	44
11071689	44
11072129	46
11072139	46
11072189	46
11072229	46
11072239	46
11072289	46
11072329	46
11072339	46
11072389	46
11072429	46
11072439	46
11072489	46
11072909	43
11072932	43
11073009	43
11073032	43
11073109	43
11073132	43
11073209	43
11073232	43
11073729	44
11073739	44
11073789	44
11073829	44
11073839	44
11073889	44
11074129	45
11074139	45
11074189	45
11074229	45
11074239	45
11074289	45
11074509	393
11074532	393
11074559	393
11074568	393
11074569	393
11074609	393
11074632	393
11074659	393
11074668	393
11074669	393
11074709	393
11074732	393
11074759	393
11074768	393
11074769	393
11100811	407,475
11100911	407,475
11101811	407,475
11101911	407,475
11130109	503
11130122	503
11130132	503
11130133	503
11130209	504
11130222	504
11130232	504
11130233	504
11130709	503
11130722	503
11130732	503
11130733	503
11130809	504
11130822	504
11130832	504
11130833	504
11170822	461
11170832	461
11170922	461
11170932	461
11180609	473
11180632	473
11180709	473
11180732	473
11180809	473
11180832	473
11191032	483
11210509	523
11210532	523
11210609	523
11210632	523
11280409	361
11280432	361
11280509	361

ARTICLE	PAGE
11280532	361
11298002	139
11298009	139
11298024	139
11298102	139
11298109	139
11298124	139
11298202	139
11298209	139
11298224	139
11298302	139
11298309	139
11298324	139
11298402	139
11298409	139
11298424	139
11298502	139
11298509	139
11298524	139
11298602	139
11298609	139
11298624	139
11298702	139
11298709	139
11298724	139
11298802	139
11298809	139
11298824	139
11340101	78
11340136	78
11340802	77
11340838	77
11345802	77
11345838	77
11346101	78
11346136	78
11346802	77
11346838	77
11380111	417
11380211	417
11390109	335
11390132	335
11390209	335
11390232	335
11390509	335
11390532	335
11390609	335
11390632	335
11391109	439
11391132	439
11391209	439
11391232	439
11391509	439
11391532	439
11391609	439
11391632	439
11392109	335
11392132	335
11392209	335
11392232	335
11393109	335
11393132	335
11393209	335
11393232	335
11393509	335
11393532	335
11393609	335
11393632	335
11394109	439
11394132	439
11394209	439
11394232	439
11394509	439
11394532	439
11394609	439
11394632	439
11395109	335
11395132	335
11395209	335
11395232	335
11400009	247
11400032	247
11400109	248
11400132	248
11400209	248
11400232	248
11401409	247
11401432	247
11402009	247
11402032	247
11402109	247
11402132	247
11402209	247
11402232	247
11402309	247
11402332	247
11402409	247
11402432	247
11402509	247
11402532	247
11402609	247
11402632	247
11402709	247
11402732	247
11402809	247
11402832	247
11430005	174
11430009	174
11430105	174
11430109	174
11430205	174
11430209	174
11430305	174
11430309	174
11440002	186
11440009	186
11440029	186
11440102	186
11440109	186
11440202	186
11440209	186
11440302	186
11440309	186
11450002	105
11450005	105
11450009	105
11450046	105
11450102	115
11450105	115
11450109	115
11450209	129
11450229	129
11450232	129
11450237	129
11450289	129
11450309	507
11450329	507
11450332	507
11450337	507
11450389	507
11456208	108
11456228	108
11456238	108
11458309	130
11458329	130
11458332	130
11458337	130
11458389	130
11458809	411
11458829	411
11458832	411
11458837	411
11458889	411
11458909	412
11458929	412
11458932	412
11458937	412
11458989	412
11790009	229
11790032	229
11790109	229
11790132	229
11790409	229
11790432	229
11790509	229
11790532	229
11793009	229
11793032	229
11793109	229
11793132	229
11793409	229
11793432	229
11793509	229
11793532	229
11800009	350
11800029	350
11800047	350
11800048	350
11800109	350
11800129	350
11800147	350
11800148	350
11800209	350
11800229	350
11800247	350
11800248	350
11800309	350
11800329	350
11800347	350
11800348	350
11801402	352
11801409	352
11801502	352
11801509	352
11801802	352
11801809	352
11801902	352
11801909	352
11803309	357
11803329	357
11803347	357
11803348	357
11803409	357
11803429	357
11803447	357
11803448	357
11803509	357
11803529	357
11803547	357
11803548	357
11803609	357
11803629	357
11803647	357
11803648	357
11803709	357
11803729	357
11803747	357
11803748	357
11803809	357
11803829	357
11803847	357
11803848	357
11805009	350
11805029	350
11805047	350
11805048	350
11805109	350
11805129	350
11805147	350
11805148	350
11805402	352
11805409	352
11805502	352
11805509	352
11806302	358
11806309	358
11806402	358
11806409	358
11806502	358
11806509	358
11806602	358
11806609	358
11806702	358
11806709	358
11806802	358
11806809	358
11806902	351
11806909	351
11807002	351
11807009	351
11807202	351
11807209	351
11807302	351
11807309	351
11807502	351
11807509	351
11807602	351
11807609	351
11808309	349
11808329	349
11808347	349
11808348	349
11808409	349
11808429	349
11808447	349
11808448	349
11808509	349
11808529	349
11808547	349
11808548	349
11808609	349
11808629	349
11808647	349
11808648	349
11808709	349
11808729	349
11808747	349
11808748	349
11808809	349
11808829	349
11808847	349
11808848	349
11810549	325
11810551	325
11810561	325
11810562	325
11815549	325
11815551	325
11815561	325
11815562	325
11870109	339
11870132	339
11873109	339
11873132	339
11877109	340
11877132	340
11900109	31
11900132	31
11970109	31
11970132	31
12023002	209
12023005	209
12023009	209
12023102	209
12023105	209
12023109	209
12023202	209
12023205	209
12023209	209
12023302	209
12023305	209
12023309	209
12023402	209
12023405	209
12023409	209
12023502	209
12023505	209
12023509	209
12023602	209
12023605	209
12023609	209
12023702	209
12023705	209
12023709	209
12023802	209
12023805	209
12023809	209
12024002	209
12024005	209
12024009	209
12024102	209
12024105	209
12024109	209
12024202	209
12024205	209
12024209	209
12024302	209
12024305	209
12024309	209
12024402	209
12024405	209
12024409	209
12024502	209
12024505	209
12024509	209
12024602	209
12024605	209
12024609	209
12024702	209
12024705	209
12024709	209
12024802	209
12024805	209
12024809	209
12300009	429
12300032	429
12330009	389
12330032	389
12330109	389
12330132	389
12331009	41
12331032	41
12331109	41
12331132	41
12345005	486
12345205	487
12345405	486
12346005	487
12346205	488
12346405	487

ARTICLE	PAGE
12374005	486
12374105	485
12374205	485
12374305	485
12411009	266
12411032	266
12411046	266
12411109	266
12411132	266
12411146	266
12411209	266
12411232	266
12411246	266
12411309	266
12411332	266
12411346	266
12411409	266
12411432	266
12411446	266
12411509	266
12411532	266
12411546	266
12411609	266
12411632	266
12411646	266
12411709	266
12411732	266
12411746	266
12411809	266
12411832	266
12411846	266
12412009	267
12412032	267
12412046	267
12412109	267
12412132	267
12412146	267
12412209	267
12412232	267
12412246	267
12412309	267
12412332	267
12412346	267
12412409	267
12412432	267
12412446	267
12412509	267
12412532	267
12412546	267
12412609	267
12412632	267
12412646	267
12412709	267
12412732	267
12412746	267
12412809	267
12412832	267
12412846	267
12413009	266
12413032	266
12413046	266
12413109	266
12413132	266
12413146	266
12413209	266
12413232	266
12413246	266
12414009	267
12414032	267
12414046	267
12414109	267
12414132	267
12414146	267
12414209	267

ARTICLE	PAGE
12414232	267
12414246	267
12420009	268
12420032	268
12420109	268
12420132	268
12420146	268
12441009	306
12441032	306
12441046	306
12441109	306
12441132	306
12441146	306
12441209	306
12441232	306
12441246	306
12441309	306
12441332	306
12441346	306
12441409	306
12441432	306
12441446	306
12441509	306
12441532	306
12441546	306
12441609	306
12441632	306
12441646	306
12441709	306
12441732	306
12441746	306
12441809	306
12441832	306
12441846	306
12442009	307
12442032	307
12442046	307
12442109	307
12442132	307
12442146	307
12442209	307
12442232	307
12442246	307
12442309	307
12442332	307
12442346	307
12442409	307
12442432	307
12442446	307
12442509	307
12442532	307
12442546	307
12442609	307
12442632	307
12442646	307
12442709	307
12442732	307
12442746	307
12442809	307
12442832	307
12442846	307
12443009	306
12443032	306
12443046	306
12443109	306
12443132	306
12443146	306
12443209	306
12443232	306
12443246	306
12444009	307
12444032	307
12444046	307
12444109	307

ARTICLE	PAGE
12444132	307
12444146	307
12444209	307
12444232	307
12444246	307
12450009	308
12450032	308
12450109	308
12450132	308
12450146	308
12471009	282
12471032	282
12471046	282
12471109	282
12471132	282
12471146	282
12471209	282
12471232	282
12471246	282
12471309	282
12471332	282
12471346	282
12471409	282
12471432	282
12471446	282
12471509	282
12471532	282
12471546	282
12471609	282
12471632	282
12471646	282
12471709	282
12471732	282
12471746	282
12471809	282
12471832	282
12471846	282
12472009	283
12472032	283
12472046	283
12472109	283
12472132	283
12472146	283
12472209	283
12472232	283
12472246	283
12472309	283
12472332	283
12472346	283
12472409	283
12472432	283
12472446	283
12472509	283
12472532	283
12472546	283
12472609	283
12472632	283
12472646	283
12472709	283
12472732	283
12472746	283
12472809	283
12472832	283
12472846	283
12473009	282
12473032	282
12473046	282
12473109	282
12473132	282
12473146	282
12473209	282
12473232	282
12473246	282
12474009	283

ARTICLE	PAGE
12474032	283
12474046	283
12474109	283
12474132	283
12474146	283
12474209	283
12474232	283
12474246	283
12480009	284
12480032	284
12480109	284
12480132	284
12480146	284
12524005	178
12524009	178
12524105	178
12524109	178
12524205	178
12524209	178
12525005	178
12525009	178
12525105	178
12525109	178
12525205	178
12525209	178
12526005	179
12526009	179
12526105	179
12526109	179
12526205	179
12526209	179
12527005	179
12527009	179
12527105	179
12527109	179
12527205	179
12527209	179
12535002	188
12535009	188
12535102	188
12535109	188
12535202	188
12535209	188
12536002	188
12536009	188
12536102	188
12536109	188
12536202	188
12536209	188
12537002	189
12537009	189
12537102	189
12537109	189
12537202	189
12537209	189
12538002	189
12538009	189
12538102	189
12538109	189
12538202	189
12538209	189
12560002	107
12560009	107
12561002	107
12561009	107
12570002	110
12570009	110
12571002	111
12571009	111
12581008	465
12581009	465
12581022	465
12590109	449
12590132	449

ARTICLE	PAGE
12590159	449
12590168	449
12590169	449
12592009	449
12592032	449
12600029	433
12600032	433
12600037	433
12600089	433
12602129	433
12602132	433
12602137	433
12602189	433
12604129	433
12604132	433
12604137	433
12604189	433
12610002	124
12610009	124
12611002	124
12611009	124
12614008	125
12614009	125
12615008	124
12615009	124
12619002	123
12619009	123
12619108	123
12619109	123
12630009	99
12633009	99
12633032	99
12640009	97
12640047	97
12640056	97
12640058	97
12641009	97
12641047	97
12641056	97
12641058	97
12642009	97
12642047	97
12642056	97
12642058	97
12643009	97
12643047	97
12643056	97
12643058	97
12670308	509
12670408	509
12671308	511
12671408	511
12672308	511
12672408	511
12680609	403
12680632	403
12680709	403
12680732	403
12685609	403
12685632	403
12685709	403
12685732	403
12686609	403
12686632	403
12686709	403
12686732	403
12710061	479
12710062	479
12710063	479
12710064	479
12710071	479
12710073	479
12710074	479
12710081	479

ARTICLE	PAGE
12710084	479
12730009	162
12730032	162
12732509	161
12732532	161
12732609	161
12732632	161
12732709	161
12732732	161
12732809	161
12732832	161
12733509	162
12733532	162
12733609	162
12733632	162
12733709	162
12733732	162
12733809	162
12733832	162
12734009	161
12734032	161
12734109	161
12734132	161
12734209	161
12734232	161
12734309	161
12734332	161
12735009	162
12735032	162
12735109	162
12735132	162
12735209	162
12735232	162
12735309	162
12735332	162
12736009	161
12736032	161
12736109	161
12736132	161
12736209	161
12736232	161
12736309	161
12736332	161
12741009	269
12741032	269
12741046	269
12741109	269
12741132	269
12741146	269
12741209	269
12741232	269
12741246	269
12741309	269
12741332	269
12741346	269
12741409	269
12741432	269
12741446	269
12741509	269
12741532	269
12741546	269
12741609	269
12741632	269
12741646	269
12741709	269
12741732	269
12741746	269
12741809	269
12741832	269
12741846	269
12742009	269
12742032	269
12742046	269
12742109	269
12742132	269
12742146	269
12742209	269
12742232	269
12742246	269
12742309	269
12742332	269
12742346	269
12742409	269
12742432	269
12742446	269
12742509	269
12742532	269
12742546	269
12742609	269
12742632	269
12742646	269
12742709	269
12742732	269
12742746	269
12742809	269
12742832	269
12742846	269
12743009	270
12743032	270
12743046	270
12743109	270
12743132	270
12743146	270
12743509	270
12743532	270
12743546	270
12751009	309
12751032	309
12751046	309
12751109	309
12751132	309
12751146	309
12751209	309
12751232	309
12751246	309
12751309	309
12751332	309
12751346	309
12751409	309
12751432	309
12751446	309
12751509	309
12751532	309
12751546	309
12751609	309
12751632	309
12751646	309
12751709	309
12751732	309
12751746	309
12751809	309
12751832	309
12751846	309
12752009	309
12752032	309
12752046	309
12752109	309
12752132	309
12752146	309
12752209	309
12752232	309
12752246	309
12752309	309
12752332	309
12752346	309
12752409	309
12752432	309
12752446	309
12752509	309
12752532	309
12752546	309
12752609	309
12752632	309
12752646	309
12752709	309
12752732	309
12752746	309
12752809	309
12752832	309
12752846	309
12753009	310
12753032	310
12753046	310
12753109	310
12753132	310
12753146	310
12753509	310
12753532	310
12753546	310
12761009	285
12761032	285
12761046	285
12761109	285
12761132	285
12761146	285
12761209	285
12761232	285
12761246	285
12761309	285
12761332	285
12761346	285
12761409	285
12761432	285
12761446	285
12761509	285
12761532	285
12761546	285
12761609	285
12761632	285
12761646	285
12761709	285
12761732	285
12761746	285
12761809	285
12761832	285
12761846	285
12762009	285
12762032	285
12762046	285
12762109	285
12762132	285
12762146	285
12762209	285
12762232	285
12762246	285
12762309	285
12762332	285
12762346	285
12762409	285
12762432	285
12762446	285
12762509	285
12762532	285
12762546	285
12762609	285
12762632	285
12762646	285
12762709	285
12762732	285
12762746	285
12762809	285
12762832	285
12762846	285
12763009	286
12763032	286
12763046	286
12763109	286
12763132	286
12763146	286
12763509	286
12763532	286
12763546	286
12771009	270
12771032	270
12771046	270
12771109	270
12771132	270
12771146	270
12771209	270
12771232	270
12771246	270
12771309	270
12771332	270
12771346	270
12771409	270
12771432	270
12771446	270
12771509	270
12771532	270
12771546	270
12771609	270
12771632	270
12771646	270
12771709	270
12771732	270
12771746	270
12771809	270
12771832	270
12771846	270
12772009	271
12772032	271
12772046	271
12773009	271
12773032	271
12773046	271
12773109	271
12773132	271
12773146	271
12773209	271
12773232	271
12773246	271
12781009	310
12781032	310
12781046	310
12781109	310
12781132	310
12781146	310
12781209	310
12781232	310
12781246	310
12781309	310
12781332	310
12781346	310
12781409	310
12781432	310
12781446	310
12781509	310
12781532	310
12781546	310
12781609	310
12781632	310
12781646	310
12781709	310
12781732	310
12781746	310
12781809	310
12781832	310
12781846	310
12782009	311
12782032	311
12782046	311
12783009	311
12783032	311
12783046	311
12783109	311
12783132	311
12783146	311
12783209	311
12783232	311
12783246	311
12791009	286
12791032	286
12791046	286
12791109	286
12791132	286
12791146	286
12791209	286
12791232	286
12791246	286
12791309	286
12791332	286
12791346	286
12791409	286
12791432	286
12791446	286
12791509	286
12791532	286
12791546	286
12791609	286
12791632	286
12791646	286
12791709	286
12791732	286
12791746	286
12791809	286
12791832	286
12791846	286
12792009	287
12792032	287
12792046	287
12793009	287
12793032	287
12793046	287
12793109	287
12793132	287
12793146	287
12793209	287
12793232	287
12793246	287
12820009	219
12820061	219
12820062	219
12820063	219
12820064	219
12820066	219
12820067	219
12820109	219
12820161	219
12820162	219
12820163	219
12820164	219
12820166	219
12820167	219
12821009	221
12821032	221
12821109	221
12821132	221
12822009	221
12822032	221
12822109	221

ARTICLE	PAGE
12822132	221
12823009	219
12823061	219
12823062	219
12823063	219
12823064	219
12823066	219
12823067	219
12823109	219
12823161	219
12823162	219
12823163	219
12823164	219
12823166	219
12823167	219
12825009	219
12825061	219
12825062	219
12825063	219
12825064	219
12825066	219
12825067	219
12825109	219
12825161	219
12825162	219
12825163	219
12825164	219
12825166	219
12825167	219
12826009	219
12826061	219
12826062	219
12826063	219
12826064	219
12826066	219
12826067	219
12826109	219
12826161	219
12826162	219
12826163	219
12826164	219
12826166	219
12826167	219
12827009	219
12827061	219
12827062	219
12827063	219
12827064	219
12827066	219
12827067	219
12827109	219
12827161	219
12827162	219
12827163	219
12827164	219
12827166	219
12827167	219
12828009	219
12828061	219
12828062	219
12828063	219
12828064	219
12828066	219
12828067	219
12828109	219
12828161	219
12828162	219
12828163	219
12828164	219
12828166	219
12828167	219
12830009	519
12830032	519
12831109	519
12831132	519
12860009	303
12860032	303
12860109	303
12860132	303
12860209	303
12860232	303
12861009	303
12861032	303
12861109	303
12861132	303
12861209	303
12861232	303
12870009	265
12870032	265
12870109	265
12870132	265
12870209	265
12870232	265
12871009	265
12871032	265
12871109	265
12871132	265
12871209	265
12871232	265
12880009	281
12880032	281
12880109	281
12880132	281
12880209	281
12880232	281
12881009	281
12881032	281
12881109	281
12881132	281
12881209	281
12881232	281
12890009	305
12890032	305
12890109	305
12890132	305
12890209	305
12890232	305
12891009	305
12891032	305
12891109	305
12891132	305
12891209	305
12891232	305
13001009	272
13001032	272
13001109	272
13001132	272
13001209	272
13001232	272
13001309	272
13001332	272
13001409	272
13001432	272
13001509	272
13001532	272
13001609	272
13001632	272
13001709	272
13001732	272
13001809	272
13001832	272
13002009	272
13002032	272
13002109	272
13002132	272
13002209	272
13002232	272
13004009	272
13004032	272
13004109	272
13004132	272
13004209	272
13004232	272
13004309	272
13004332	272
13004409	272
13004432	272
13004509	272
13004532	272
13004609	272
13004632	272
13004709	272
13004732	272
13004809	272
13004832	272
13005009	272
13005032	272
13005109	272
13005132	272
13005209	272
13005232	272
13011009	312
13011032	312
13011109	312
13011132	312
13011209	312
13011232	312
13011309	312
13011332	312
13011409	312
13011432	312
13011509	312
13011532	312
13011609	312
13011632	312
13011709	312
13011732	312
13011809	312
13011832	312
13012009	312
13012032	312
13012109	312
13012132	312
13012209	312
13012232	312
13013009	312
13013032	312
13013109	312
13013132	312
13013209	312
13013232	312
13014009	312
13014009	312
13014032	312
13014109	312
13014132	312
13014209	312
13014232	312
13014309	312
13014332	312
13014332	312
13014409	312
13014432	312
13014509	312
13014532	312
13014609	312
13014632	312
13014709	312
13014732	312
13014809	312
13014832	312
13015032	312
13015109	312
13015132	312
13015209	312
13015232	312
13021009	288
13021032	288
13021109	288
13021132	288
13021209	288
13021232	288
13021309	288
13021332	288
13021409	288
13021432	288
13021509	288
13021532	288
13021609	288
13021632	288
13021709	288
13021732	288
13021809	288
13021832	288
13022009	288
13022032	288
13022109	288
13022132	288
13022209	288
13022232	288
13023009	288
13023032	288
13023109	288
13023132	288
13023209	288
13023232	288
13024009	288
13024032	288
13024109	288
13024132	288
13024209	288
13024232	288
13024309	288
13024332	288
13024409	288
13024432	288
13024509	288
13024532	288
13024609	288
13024632	288
13024709	288
13024732	288
13024809	288
13024832	288
13025009	288
13025032	288
13025109	288
13025132	288
13025209	288
13025232	288
13026009	312
13026032	312
13026109	312
13026132	312
13026209	312
13026232	312
13030409	241
13030432	241
13031009	241
13031032	241
13031109	241
13031132	241
13031209	241
13031232	241
13031309	241
13031332	241
13031409	241
13031432	241
13031509	241
13031532	241
13031609	241
13031632	241
13031709	241
13031732	241
13031809	241
13031832	241
13050109	143
13050132	143
13050176	143
13050209	143
13050232	143
13050276	143
13050309	143
13050332	143
13050376	143
13051009	312
13051109	143
13051132	143
13051176	143
13051209	143
13051232	143
13051276	143
13051309	143
13051332	143
13051376	143
13051509	143
13051532	143
13051576	143
13051609	143
13051632	143
13051676	143
13051709	143
13051732	143
13051776	143
13052109	143
13052132	143
13052176	143
13052209	143
13052232	143
13052276	143
13052309	143
13052332	143
13052376	143
13053109	143
13053132	143
13053176	143
13053209	143
13053232	143
13053276	143
13053309	143
13053332	143
13053376	143
13053509	143
13053532	143
13053576	143
13053609	143
13053632	143
13053676	143
13053709	143
13053732	143
13053776	143
13054109	144
13054132	144
13054176	144
13054209	144
13054232	144
13054276	144
13054309	144
13054332	144
13054376	144

ARTICLE	PAGE
13055109	144
13055132	144
13055176	144
13055209	144
13055232	144
13055276	144
13055309	144
13055332	144
13055376	144
13055509	144
13055532	144
13055576	144
13055609	144
13055632	144
13055676	144
13055709	144
13055732	144
13055776	144
13056109	144
13056132	144
13056176	144
13056209	144
13056232	144
13056276	144
13056309	144
13056332	144
13056376	144
13057109	144
13057132	144
13057176	144
13057209	144
13057232	144
13057276	144
13057309	144
13057332	144
13057376	144
13057509	144
13057532	144
13057576	144
13057609	144
13057632	144
13057676	144
13057709	144
13057732	144
13057776	144
13070009	374
13070032	374
13070109	374
13070132	374
13070309	374
13070332	374
13070409	374
13070432	374
13070609	374
13070632	374
13070709	374
13070732	374
13071009	373
13071032	373
13071109	373
13071132	373
13071309	373
13071332	373
13071409	373
13071432	373
13071609	373
13071632	373
13071709	373
13071732	373
13071909	373
13071932	373
13072009	373
13072032	373
13080002	105
13080005	105
13080009	105
13080046	105
13080102	106
13080109	106
13080202	115
13080205	115
13080209	115
13090008	107
13090009	107
13090028	107
13100002	109
13100005	109
13100009	109
13100102	110
13100109	110
13100202	116
13100205	116
13100209	116
13130005	171
13130009	171
13130105	171
13130109	171
13130205	172
13130209	172
13130305	172
13130309	172
13131002	184
13131009	184
13131102	184
13131109	184
13131202	185
13131209	185
13131302	185
13131309	185
13150009	89
13150032	89
13150109	89
13150132	89
13150209	89
13150232	89
13150309	89
13150332	89
13150409	89
13150432	89
13150509	89
13150532	89
13150609	89
13150632	89
13150709	89
13150732	89
13150809	89
13150832	89
13150909	89
13150932	89
13151009	89
13151032	89
13151109	89
13151132	89
13160009	89
13160032	89
13160109	89
13160132	89
13160209	89
13160232	89
13160309	89
13160332	89
13160409	89
13160432	89
13160509	89
13160532	89
13160609	89
13160632	89
13160709	89
13160732	89
13160809	89
13160832	89
13160909	89
13160932	89
13161009	89
13161032	89
13161109	89
13161132	89
13170005	193
13170009	193
13170105	193
13170109	193
13170205	194
13170209	194
13170305	194
13170309	194
13171002	198
13171009	198
13171102	198
13171109	198
13171202	199
13171209	199
13171302	199
13171309	199
13180009	233
13180032	233
13180109	233
13180132	233
13180209	233
13180232	233
13180309	233
13180332	233
13180409	233
13180432	233
13180509	233
13180532	233
13181009	233
13181032	233
13181109	233
13181132	233
13181209	233
13181232	233
13181309	233
13181332	233
13181409	233
13181432	233
13181509	233
13181532	233
13182009	233
13182032	233
13182109	233
13182132	233
13182209	233
13182232	233
13182309	233
13182332	233
13182409	233
13182432	233
13182509	233
13182532	233
13250009	453
13250032	453
13261009	329
13261032	329
13261109	329
13261132	329
13270009	443
13270032	443
13270109	443
13270132	443
13270209	443,527
13270232	443,527
13280009	62
13280032	62
13280109	62
13280132	62
13280209	62
13280232	62
13280309	62
13280332	62
13280409	62
13280432	62
13280509	62
13280532	62
13280609	62
13280632	62
13280709	62
13280732	62
13280809	62
13280832	62
13280909	62
13280932	62
13281009	62
13281032	62
13281109	62
13281132	62
13281209	63
13281232	63
13281309	63
13281332	63
13281409	63
13281432	63
13281509	63
13281532	63
13281609	63
13281632	63
13281709	63
13281732	63
13290009	53
13290032	53
13290109	53
13290132	53
13290209	53
13290232	53
13290309	53
13290332	53
13290409	53
13290432	53
13290509	53
13290532	53
13290609	56
13290632	56
13290709	56
13290732	56
13290809	56
13290832	56
13290909	56
13290932	56
13291009	56
13291032	56
13291109	56
13291132	56
13291209	60
13291232	60
13291309	60
13291332	60
13291409	60
13291432	60
13291509	60
13291532	60
13291609	60
13291632	60
13291709	60
13291732	60
13300009	53
13300032	53
13300109	53
13300132	53
13300209	53
13300232	53
13300309	53
13300332	53
13300409	53
13300432	53
13300509	53
13300532	53
13300609	54
13300632	54
13300709	54
13300732	54
13300809	54
13300832	54
13300909	54
13300932	54
13301009	54
13301032	54
13301109	54
13301132	54
13301209	56
13301232	56
13301309	56
13301332	56
13301409	56
13301432	56
13301509	56
13301532	56
13301609	56
13301632	56
13301709	56
13301732	56
13301809	57
13301832	57
13301909	57
13301932	57
13302009	57
13302032	57
13302109	57
13302132	57
13302209	57
13302232	57
13302309	57
13302332	57
13302409	60
13302432	60
13302509	60
13302532	60
13302609	60
13302632	60
13302709	60
13302732	60
13302809	60
13302832	60
13302909	60
13302932	60
13303009	61
13303032	61
13303109	61
13303132	61
13303209	61
13303232	61
13303309	61
13303332	61
13303409	61
13303432	61
13303509	61
13303532	61
14040009	81
14040071	81
14040109	81
14040171	81
14040209	81

ARTICLE	PAGE
14040271	81
14040309	81
14040371	81
14040409	81
14040471	81
14040509	81
14040571	81
14040609	81
14040671	81
14040709	81
14040771	81
14040809	81
14040871	81
14041009	81
14041071	81
14041109	81
14041171	81
14041209	81
14041271	81
14041309	81
14041371	81
14041409	81
14041471	81
14041509	81
14041571	81
14041609	81
14041671	81
14041709	81
14041771	81
14041809	81
14041871	81
14050009	83
14050071	83
14050109	83
14050171	83
14050209	83
14050271	83
14050309	83
14050371	83
14050409	83
14050471	83
14050509	83
14050571	83
14050609	83
14050671	83
14050709	83
14050771	83
14050809	83
14050871	83
14051009	83
14051071	83
14051109	83
14051171	83
14051209	83
14051271	83
14051309	83
14051371	83
14051409	83
14051471	83
14051509	83
14051571	83
14051609	83
14051671	83
14051709	83
14051771	83
14051809	83
14051871	83
14060005	140
14060105	140
14060205	140
14060305	140
14060405	140
14060505	140
14060605	140

ARTICLE	PAGE
14060705	140
14060805	140
14060905	140
14061005	140
14061105	140
14061205	140
14061305	140
14061405	140
14070002	139
14070009	139
14070102	139
14070109	139
14070202	139
14070209	139
14070302	139
14070309	139
14070402	139
14070409	139
14070502	139
14070509	139
14070602	139
14070609	139
14070702	139
14070709	139
14070802	139
14070809	139
14070902	139
14070909	139
14071002	139
14071009	139
14071102	139
14071109	139
14080129	363
14080148	363
14080172	363
14080173	363
14080174	363
14080175	363
14080229	363
14080248	363
14080272	363
14080273	363
14080274	363
14080275	363
14081129	363
14081148	363
14081172	363
14081173	363
14081174	363
14081175	363
14081229	364
14081248	364
14081272	364
14081273	364
14081274	364
14081275	364
14081329	363
14081348	363
14081372	363
14081373	363
14081374	363
14081375	363
14081429	364
14081448	364
14081472	364
14081473	364
14081474	364
14081475	364
14091009	151
14091032	151
14091109	151
14091132	151
14091209	151
14091232	151

ARTICLE	PAGE
14091309	151
14091332	151
14091409	151
14091432	151
14091509	151
14091532	151
14092009	151
14092032	151
14092109	151
14092132	151
14092209	151
14092232	151
14092309	151
14092332	151
14092409	151
14092432	151
14092509	151
14092532	151
14093009	152
14093032	152
14093109	152
14093132	152
14093209	152
14093232	152
14093309	152
14093332	152
14093409	152
14093432	152
14093509	152
14093532	152
93160120	383
93160122	383
93160320	383
93160322	383
93162220	383
93162222	383
93350010	253
93350012	253
93350020	253
93350022	253
93352010	253
93352012	253
93352020	253
93352022	253
93410010	257
93410011	257
93410012	257
93410020	257
93410021	257
93410022	257
93411010	257
93411011	257
93411012	257
93411020	257
93411021	257
93411022	257
93420010	259
93420011	259
93420012	259
93420020	259
93420021	259
93420022	259
93421010	259
93421011	259
93421012	259
93421020	259
93421021	259
93421022	259
93430016	255
93430017	255
93430018	255
93430019	255
93430026	255
93430027	255

ARTICLE	PAGE
93430028	255
93430029	255
93431016	255
93431017	255
93431018	255
93431019	255
93431026	255
93431027	255
93431028	255
93431029	255
93530420	73
93530422	73
98530420	73
98530422	73

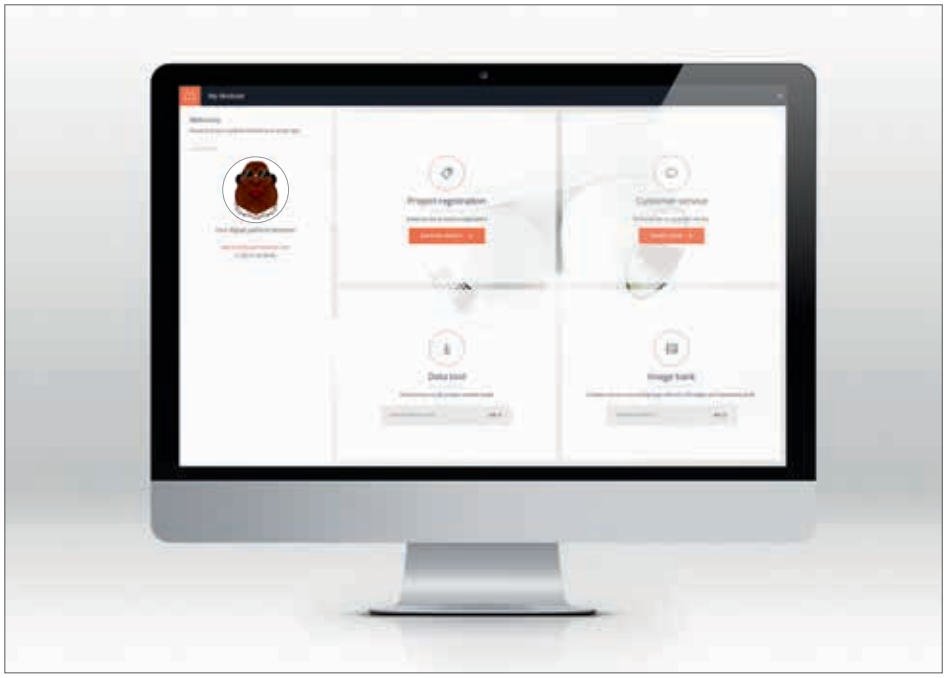

DIGITAL PLATFORM

My Modular is a single sign-on digital platform, offering easy access to Modular's image library, profile configurator and to a large variety of product information.
To enjoy the benefits of My Modular, go to **my.supermodular.com** and complete your registration.

Photo references by

Alfons Lenděr's	50, 50, 200, 278, 396
Andrin Winteler	133
BOA	59, 59, 84, 91, 93, 95, 146, 147, 155, 156, 157, 166, 181, 204, 220, 223, 234, 239, 273, 275, 289, 290, 314, 330, 333, 377, 378, 379, 445, 446, 454, 456, 467, 480, 491, 497, 512, 528, 553, 572, 611
Christoph Ris - Fotografie, Biglen	102
David Frutos	100, 100, 588,
Dick Kickstra	244, 551
Dre Wouters	48, 48, 126, 190, 205
Femex for Import	158
Filip Dujardin	559
FOTO THOME	320, 320, 596, 597, 575
Frederic Ducout	202, 202, 600
Frederik Vercruysse	359
Gregory Massat	148
Guillaume Grasset	409
Gwen Mustamu	35, 35, 94, 168, 169, 225, 279, 300, 301, 562
Horizonphotoworks	380
Jansje Klazinga	65, 65, 134, 294, 327, 355, 612
Jaro van Meerten	27, 27, 243, 415, 605
Jim Van Loo	29, 29, 33, 113, 127, 154, 163, 164, 177, 215, 224, 236, 263, 276, 295, 317, 371, 381, 404, 441, 451, 520, 538, 543, 563, 564, 604
Joaquin Zamora	461
Kimmo Virtanen	552
Luc Boegly	32, 29, 33, 113, 127, 154, 163, 164, 177, 215, 224, 236, 263, 276, 295, 317, 371, 381, 404, 441, 451, 520, 538, 543, 563, 564, 604
Luc Roymans	203, 203, 207
Luis Diaz Diaz	251, 251, 304, 434, 440, 558, 582
Marek Costey	103
Mario Miranda	616
Marketa Navratilova	408
Matthijs van Roon	25, 25, 66, 326, 346, 427, 466, 470, 542, 614
Michael van Oosten	39, 39, 544
Nabor Dupont	67
Nelson Garrido	64
Nicoline Rodenburg	414
Olivier Dancy	583
Peter Baas	71, 71, 316, 397, 399, 450, 601
Philip Braem	118, 118, 187, 191, 206, 231, 242, 336, 337, 347, 366, 367, 376, 405, 493, 505, 537, 540, 541, 546, 550, 565, 590
PhotoBoyKortekaas	165
Rene Gonkel	26, 26, 51, 250, 319, 368, 398
Rick Geenjaar, Procore	554
Ronald Smits	196, 196, 214, 297, 370, 400, 419, 539
Tim Van De Velde	28, 28, 195, 226, 341, 343
URBAIN ARCHITECTENCOLLECTIEF & STUDIO CLAERHOUT	296
Wouter van der Sar	34, 34, 135
www.ulaphotography.com	79
Zenber Architecten	119, 119, 120, 131, 321

Studio photography by

BOA, Philip Braem and Frederik Vercruysse.

MODULAR LIGHTING INSTRUMENTS — HEADQUARTERS

(For general information and sales network addresses in other countries)
Armoedestraat 71 – 8800 Roeselare – Belgium
Tel: +32 (0)51 26 56 56 – Fax: +32 (0) 51 22 80 04
welcome@supermodular.com – www.supermodular.com

MODULAR LIGHTING — INSTRUMENTS

Australia & New Zealand
22-38 Yurong Street
Darlinghurst NSW 2010 - Australia
Tel: +61 2 9571 8800 - Fax: +61 2 9571 88 11
welcome@modularlighting.com.au
www.supermodular.com

Belgium
Armoedestraat 71 - 8800 Roeselare
Tel: +32 (0)51 26 56 56 - Fax: +32 (0)51 22 80 04
welcome@supermodular.com
www.supermodular.com

China
Suite 7302, Bridge 8, No. 10 Middle Jianguo Road, Shanghai
Tel: +86 21 6466 8828 - Fax: +86 21 6466 6896
gc.modular@philips.com
www.supermodular.com

Denmark
Klubiensvej 22, Pakhus 48 - 2150 Nordhavnen - Copenhagen
Tel: +45 3613 2100 - Fax: +45 3613 2101
welcome.denmark@supermodular.com
www.supermodular.com

France
31, Rue du Mail - 75002 Paris
Tel: +33 1 45 42 24 25 - Fax: +33 1 45 42 43 20
bonjour@supermodular.com
www.supermodular.com

Germany
Tel: +32 (0)51 26 56 56 - Fax: +32 (0) 51 22 80 04
welcome.germany@supermodular.com
www.supermodular.com

Iberia & Latin - South America
Tel: +34 617 304905 - Tel: +32 (0)51 26 56 56
welcome.iberia@supermodular.com
www.supermodular.com

India
9th Floor, DLF-9B, DLF Cyber City
DLF Phase 3, Gurgaon 122002
Tel: +91-124-4606560
papiya.bose@philips.com

Italy
Via G. Casati 23 - 20900 Monza (MB)
Tel: +39 039 203 6242
welcome.italy@supermodular.com
www.supermodular.com

Japan
1F, 5-9-3 Minami-azabu, Minato-ku - Tokyo 106-0047
Tel: +81-3-6826-4511 - Fax: +81-3-6826-4512
welcome@modularjp.com
www.supermodular.com

Luxembourg
5, Rue de l'église - 1458 Luxembourg/Hollerich
Tel: +352 621 438 899 - Tel: +32 (0) 51 26 56 56
welcome@supermodular.com
www.supermodular.com

Norway
Eidsvågbakken 1 - 5105 Eidsvåg (Bergen)
Tel. +47 92 21 92 20
Nedregt 7 - 00551 Oslo
Tel: +47 928 14 481
welcome.norway@supermodular.com
www.supermodular.com

Russia
Tel: +7 919 991 30 73 - Tel: +32 (0)51 26 56 56
welcome.russia@supermodular.com
www.supermodular.com

Sweden
Studio B3 - Barnhusgatan 3 - 111 23 Stockholm
Tel: +46 8 523 29 900
welcome.sweden@supermodular.com
www.supermodular.com

Switzerland
Aargauerstrasse 250 - 8048 Zürich
Tel: + 41 44 456 44 00 - Fax: +41 44 456 44 09
welcome.switzerland@supermodular.com
www.modular-lighting.ch

The Netherlands
Bouwerij 54 - 1185 XX Amstelveen
Tel: +31 (0)20 347 30 47 - Fax: +31 (0)20 347 30 48
info@modular.nl
www.modular.nl

United Kingdom
28, Leonard Street - EC2A 4BY London
Tel: +44 (0)20 7681 99 33 - Fax: +44 (0)20 7681 99 43
sales@atrium.ltd.uk
www.modular-lighting.co.uk

USA & Canada
14 Wooster Street - NY 10012 New York
Tel: +1 212 966 1399 - Fax: +1 212 966 1799
welcome.us@supermodular.com
www.supermodular.com/na

© 2017 Modular Lighting Instruments - all rights reserved

Modular reserves the right to alter material, dimensions and characteristics without prior notice.
This catalogue replaces all previous catalogues.
Read installation instructions carefully. Technical information on the installation instruction has precedence over the information in the catalogue and the legend.
Weights indicated are fixture including packaging.
Our general terms and conditions shall apply notwith-standing any stipulation to the contrary to all the orders and agreements with Modular.
You can obtain a copy of these conditions on demand.

For latest information and specifications visit **www.supermodular.com**

All procucts are CE

ART. NR. 7000297