



# Primaline Halogen Transformers

## Primaline 150 230-240V 50/60Hz

Philips Primaline is a high-frequency electronic halogen transformer suitable for low-voltage 12 V halogen lamps. It offers ultimate performance and is built with overload and short circuit protection to IEC and ENEC standards. It is available in 70, 105 and 150 W versions and fits in small down light halogen applications.

## Product data

### • General Information

Type Version	mk2
Lamp Type	LV Halogen
Number Of Lamps	3 piece/unit

### • Operating and Electrical

Input Voltage	230 to 240 V
Input Frequency	50-60, 1 Hz
Input Power (Nom)	70-150 W

### • System characteristics

Rated Ballast-Lamp Power	70-150 W
--------------------------	----------

### • Temperature

T-Case Lifetime (Nom)	65 °C
T-Case Maximum (Max)	80 °C

### • Approval and Application

Approval Marks	SELV CE marking ENEC certificate
----------------	--

### • Product Data




Full product code	871150091270130
Order product name	Primaline 150 230-240V 50/60Hz
EAN/UPC - Product	8711500912701
Order code	913700627791
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	50
Material Nr. (12NC)	913700627791
Net Weight (Piece)	0.200 kg

## Warnings and Safety

- Transformer is not suitable for DC operation

**PHILIPS**

## Dimensional drawing

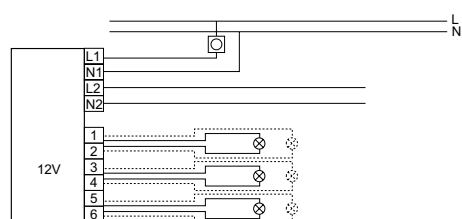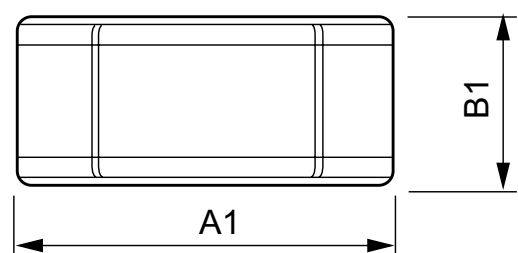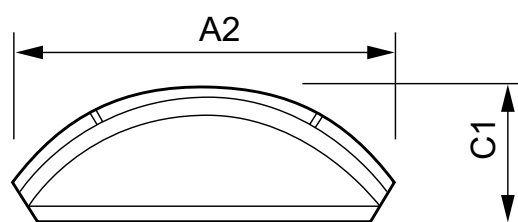

### Primaline 150 230-240V 50/60Hz

Product	C1	A1	B1
Primaline 150 230-240V 50/60Hz	33 mm	145 mm	51 mm



© 2015 Philips Lighting Holding B.V.  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2015, December 24  
data subject to change