



# GENIE

GENIE 5W WW E14 220-240V 1PF

Functional non-covered Energy saving lamp, with money saving high quality light and compact design. This lamp is small enough to fit neatly wherever you need extra bright light at home, enables easy replacement of most incandescent lamp all the way.

## Product data

### • General Characteristics

Cap-Base	E14
Bulb	Stick
Nominal Lifetime	10000 hr
Rated Lifetime (hours)	10000 hr
Rated Lifetime (years)	10 an

### • Light Technical Characteristics

Color Code	827 [CCT of 2700K]
Color Rendering Index	81 (min) Ra8
Color Designation (text)	Warm White
Color Temperature	2700 K
Color Temperature Technical	2700 K
Luminous flux lamp	250 Lm
Rated Luminous Flux	250 Lm
Luminous Efficacy Lamp	50 Lm/W
Lumen Maintenance 2000h	88 %
Lumen Maintenance 6000h	70 %
LLMF - end nominal lifetime	65 %
Chromaticity Coordinate X	463 -
Chromaticity Coordinate Y	420 -

### • Electrical Characteristics

Rated Wattage	5.0 W
---------------	-------

Lamp Wattage	5 W
Power Factor	0.6 -
Voltage	220-240 V
Lamp Current mA	35 mA
Line Frequency	50/60 Hz
Dimmable	No
Wattage Equivalent	27 W
Starting Time	0.3 s
Warm-up Time to 60% Light Outp	5 (min), 40 (max) s

### • Environmental Characteristics

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content	1.5 (nom), 2.0 (max) mg
Energy consumption kWh/1000h	5 kWh

### • Measuring Conditions

Switching cycle	10000X
-----------------	--------

### • Product Dimensions

Overall Length C	109.0 (max) mm
Diameter D	23.0 (max) mm
Width F	37.4 (max) mm

### • Product Data

Order code	929689133101
Full product code	929689133101
Full product name	GENIE 5W WW E14 220-240V 1PF
Order product name	GENIE 5W WW E14 220-240V 1PF/6
Pieces per pack	1

# PHILIPS

Packing configuration 6  
 Packs per outerbox 6  
 Bar code on pack - EAN1 8711500801142  
 Bar code on outerbox - EAN3 8711500801647

Logistic code(s) - 929689133101  
 12NC  
 Net weight per piece 0.036 kg


## Warnings and Safety

- Breaking a lamp is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a closed plastic

bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


- Compact fluorescent lamps have to be treated as special waste, they must be taken to your local waste facilities for recycling. The European Lighting Industry has set up an infrastructure, capable of recycling mercury, other metals, glass etc.

## Dimensional drawing

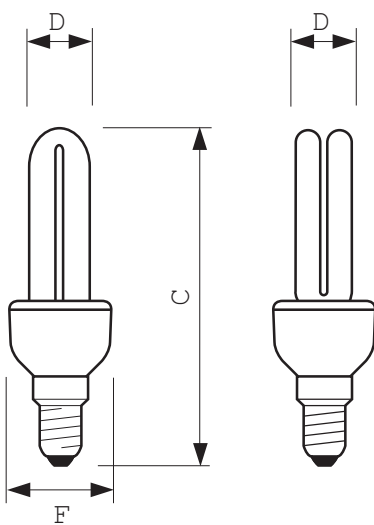

### GENIE 5W WW E14 220-240V 1PF

Product	C (Max)	D (Max)	F (Max)
Econ Genie Erp 5W/827 E14 220-240V	109.0	23.0	37.4



E14



© 2013 Koninklijke Philips N.V. (Royal Philips)  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2013, October 9  
data subject to change