



MASTER MHN-LA

MASTER MHN-LA 1000W/956 230V XWH

Compact quartz metal halide lamps with double-pinch

Product data

• General Characteristics

Cap-Base	X528
Cap-Base Information	Cable
Bulb	TD40 [TD 40mm]
Bulb Finish	Clear
Operating Position	p5 [Parallel +/-5D or Horizontal(HOR)]
Life to 5% failures	6000 hr
Life to 10% failures	8000 hr
Life to 20% failures	10000 hr
Life to 50% failures	15000 hr

• Light Technical Characteristics

Color Code	956 [CCT of 5600K]
Color Rendering Index	90 Ra8
Color Designation (text)	Daylight
Color Temperature	5600 K
Color Temperature Technical	5600 K
Luminous Flux Lamp EM	90000 Lm
Luminous Efficacy Lamp EM	86.5 Lm/W
Lumen Maintenance 1000h	90 %
Lumen Maintenance 2000h	80 %
Lumen Maintenance 5000h	60 %
Lumen Maintenance 10000h	35 %
Luminance Average EM	1600 cd/cm ²

Chromaticity Coordinate X	330 -
Chromaticity Coordinate Y	339 -

• Electrical Characteristics

Lamp Wattage	1000 W
Lamp Wattage EM	1040.0 W
Voltage	230 V
Lamp Voltage	125 V
Lamp Current EM	9.3 A
Dimmable	No

• Environmental Characteristics

Mercury (Hg) Content	85 mg
----------------------	-------

• UV-related Characteristics

Specific Eff. Radiant Power	270 mW/klm
-----------------------------	------------

• Luminaire Design Requirements

Pinch Temperature	350 (max) C
Bulb Temperature	920 (max) C

• Product Dimensions

Base Face to Base Face A	294 mm
Overall Length C	288 (max) mm
Diameter D	40 (max) mm
Light Center Length L	145 mm

PHILIPS

MASTER MHN-LA

Arc Length O 40.5 mm
Cable Length X 35 mm

• Product Data

Order code 928072205130
Full product code 928072205130
Full product name MASTER MHN-LA 1000W/956 230V XWH
Order product name MASTER MHN-LA 1000W/956 230V XWH


Pieces per pack 1
Packing configuration 1
Packs per outerbox 1
Bar code on pack - EAN1 8718291548218
Bar code on outerbox - EAN3 8711500200778
Logistic code(s) - 12NC 928072205130
ILCOS code MN-1000-E-K-/H
Net weight per piece 0.132 kg

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)

- The luminaire must be able to contain hot lamp parts if the lamp ruptures


Dimensional drawing

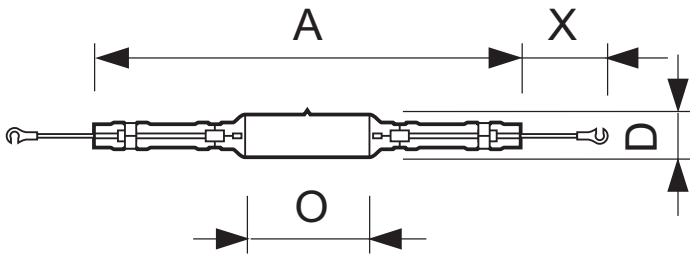

MASTER MHN-LA 1000W/956 230V XWH

Product	A (Norm)	D (Max)	O (Norm)	X (Norm)
MHN-LA 1000W/956 230V XWH	294	40	40.5	35

Photometric data

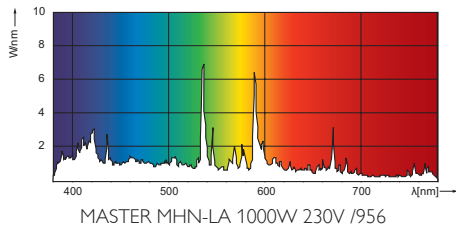



© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2013, June 25
data subject to change