



MASTER TL5 High Efficiency Xtra Eco

MASTER TL5 HE Xtra Eco 32=35W/840 1SL

TL5 High Efficiency Xtra Eco lamp (tube diameter 16 mm) provides the ideal combination of extra-long life and extra energy savings via simple lamp-for-lamp replacement of TL5 HE lamps, without any compromise on the high lighting quality.

Product data

• General Characteristics

Cap-Base	G5
Bulb	T5 [16 mm]
Life to 10% fail	30000 hr
Preheat EL,3h	
Life to 50% fail	45000 hr
Preheat EL,3h	
LSF HF Preheat	99 %
2000h Rated,3h	
LSF HF Preheat	99 %
4000h Rated,3h	
LSF HF Preheat	99 %
6000h Rated,3h	
LSF HF Preheat	99 %
8000h Rated,3h	
LSF HF Preheat	99 %
12000h Rated,3h	
LSF HF Preheat	99 %
16000h Rated,3h	
LSF HF Preheat	94 %
20000h Rated,3h	

• Light Technical Characteristics

Color Code	840 [CCT of 4000K]
Color Rendering Index	80 (min), 82 (nom), 85 (max) Ra8
Color Designation (text)	Cool White
Color Temperature	4000 K
Luminous Flux EL 25°C, Rated	3250 Lm
Luminous Flux EL 25°C, Nominal	3250 Lm
Luminous Flux Lamp EL 35°C	3650 Lm

Lum Efficacy Rated HF 25°C	103 Lm/W
Lum Efficacy Rated HF 35°C	114 Lm/W
LLMF HF 2000h Rated	96 %
LLMF HF 4000h Rated	95 %
LLMF HF 6000h Rated	94 %
LLMF HF 8000h Rated	93 %
LLMF HF 12000h Rated	92 %
LLMF HF 16000h Rated	91 %
LLMF HF 20000h Rated	90 %
Design Temperature	35 C
Chromaticity Coordinate X	380 -
Chromaticity Coordinate Y	380 -

• Electrical Characteristics

Lamp Wattage	32 W
Lamp Wattage EL 25°C, Rated	31.7 W
Lamp Wattage EL 25°C, Nominal	32.0 W
Lamp Wattage EL 35°C	32.1 W
Lamp Voltage EL 25°C	190 V
Lamp Voltage EL 35°C	192 V

PHILIPS

MASTER TL5 High Efficiency Xtra Eco

Lamp Current EL 25°C	0.170 A
Lamp Current EL 35°C	0.170 A
Dimmable	Yes

• Environmental Characteristics

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content	3.0 mg

• Measuring Conditions

Calibration Current	0.170 A
HF Generator Rated Voltage	392 V
Resistor	1200 ohm

• Product Dimensions

Base Face to Base Face A	1449.0 (max) mm
--------------------------	-----------------

Insertion Length B	1453.7 (min), 1456.1 (max) mm
Overall Length C	1463.2 (max) mm
Diameter D	17 (max) mm

• Product Data


Order code	927994584055
Full product code	927994584055
Full product name	MASTER TL5 HE Xtra Eco 32=35W/840 1SL
Order product name	MASTER TL5 HE Xtra Eco 32=35W/840 1SL/40
Pieces per pack	1
Packing configuration	40
Packs per outerbox	40
Bar code on pack - EAN1	8718291669500
Bar code on outerbox - EAN3	8718291669517
Logistic code(s) - 12NC	927994584055
Net weight per piece	128.700 gr

Warnings and Safety

- A reduction in energy consumption is only achieved with current-controlled gear.
- The lamps operate perfectly with power-controlled gear, but in that case the light output can be up to 10% higher.
- To achieve lifetimes as published for 100% operation, dimming below 30% should not be applied.


- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing

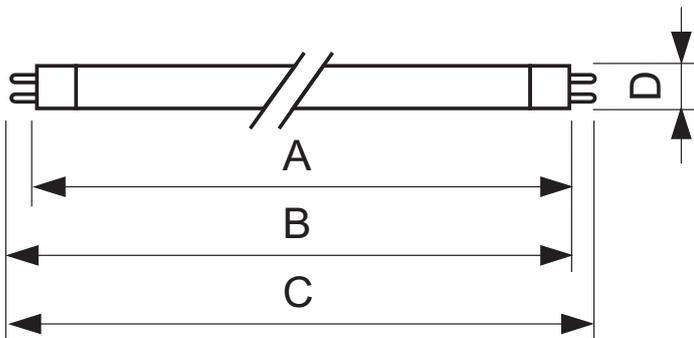



MASTER TL5 HE Xtra Eco 32=35W/840 1SL

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL5 HE Xtra Eco 32=35W/840	1449.0	1453.7	1456.1	1463.2	17



G5

Photometric data

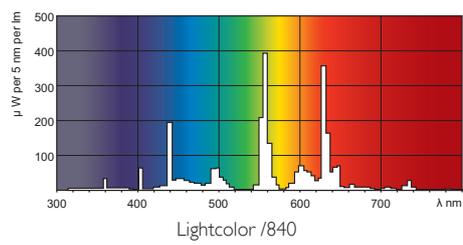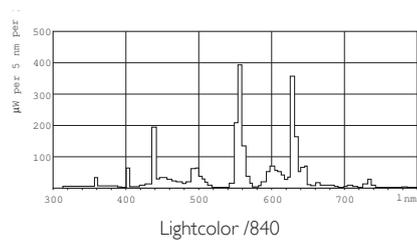

© 2015 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, July 3
data subject to change