



TL-D Blacklight Blue

TL-D 15W BLB 1SL

TL-D/08 Blacklight Blue lamps are low-pressure mercury-vapor fluorescent lamps. They have an inner envelope coated with a fluorescent powder that emits long-wave UV radiation to excite luminescence.

Product data

• General Characteristics

Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Bulb	T26 [T 26mm]
Main Application	Blacklight Blue
Life to 50% failures	8000 hr
EM	
Useful Life	5000 hr

• Light Technical Characteristics

Colour Code	108 [08 lead free glass]
Colour Designation	Blacklight Blue

• Electrical Characteristics

Lamp Wattage	15 W
Technical Lamp	15.9 W
Power	
Lamp Voltage	54 V
Lamp Current	0.335 A

• Environmental Characteristics

Mercury (Hg) Content	5.0 mg
----------------------	--------

• UV-related Characteristics

UV-B/UV-A (IEC)	0.2 %
-----------------	-------

UV-A Radiation 100hr (IEC)	3.0 W
-------------------------------	-------

• Product Dimensions

Base Face to Base Face A	437.4 (max) mm
Insertion Length B	442.1 (min), 444.5 (max) mm
Overall Length C	451.6 (max) mm
Diameter D	28 (max) mm


• Product Data

Order code	951090 40
Full product code	871150095109040
Full product name	TL-D 15W BLB 1SL
Order product name	TL-D 15W BLB 1SL/25
Pieces per pack	1
Packing configuration	25
Packs per outerbox	25
Bar code on pack - EAN1	8711500951090
Bar code on outerbox - EAN3	8711500951106
Logistic code(s) - 12NC	928024810803
Net weight per piece	77.100 gr

Dimensional drawing


TL-D Blacklight Blue

Dimensional drawing

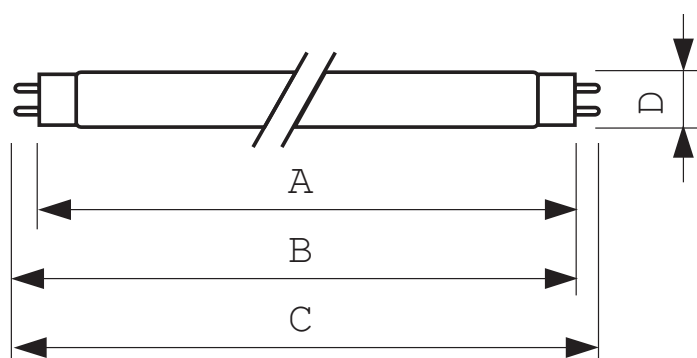



TL-D 15W BLB 1SL

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL-D 15W/108	437.4	442.1	444.5	451.6	28



G13

Photometric data

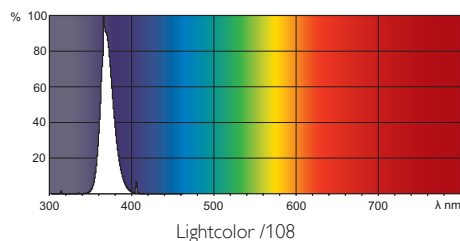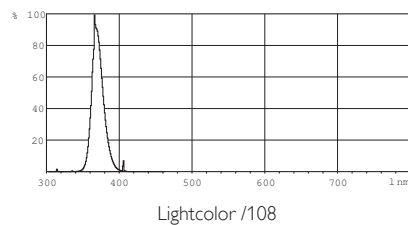

© 2013 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2013, May 9
data subject to change