


Product data sheet

Specifications



plug in relay, Harmony Solid State Slim Relays, 3.5A, DC switching, input 3 to 12V DC, output 1 to 24V DC

SSL1D03JD

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony Solid State Relays
Device short name	SSL
Phase	1 phase
[Uc] control circuit voltage	3...12 V
Output switching mode	DC switching
Ui rated insulation voltage	30 V
Insulation resistance	> 100 MOhm 500 V DC
Electromagnetic compatibility	Electrostatic discharge - test level: 4 kV criteria B (contact discharge) conforming to IEC 61000-4-2 Electrostatic discharge - test level: 8 kV criteria B (air discharge) conforming to IEC 61000-4-2 Conducted RF disturbances - test level: 10 V criteria A (0.15...80 MHz) conforming to IEC 61000-4-6 Radiated radio-frequency electromagnetic field immunity test - test level: 10 V/m criteria A (80 MHz to 1 GHz) conforming to IEC 61000-4-3 Radiated radio-frequency electromagnetic field immunity test - test level: 3 V/m criteria A (1.4...6 GHz) conforming to IEC 61000-4-3 Electrical fast transient/burst immunity test - test level: 2 kV criteria B (5 kHz) conforming to IEC 61000-4-4 Electrical fast transient/burst immunity test - test level: 1 kV criteria B (5 kHz) conforming to IEC 61000-4-4 Surge immunity test - test level: 0.5 kV criteria B (line to line) conforming to IEC 61000-4-5 Surge immunity test - test level: 1 kV criteria B (line to earth) conforming to IEC 61000-4-5 Radiated emission - test level: 30...1000 Mhz conforming to IEC 60947-1 Conducted emission - test level: 0.15...30 Mhz conforming to IEC 60947-1

[Uimp] rated impulse withstand voltage	3.5 kV for input to case IEC 62314 3.5 kV for input/output circuit IEC 62314 3.5 kV for input/output circuit UL 508 3.5 kV output to case IEC 62314 3.5 kV output to case 3.5 kV for input to case UL 508 3.5 kV output to case UL 508
--	--

Complementary

Mounting Support	Socket
Line Rated Current	3.5 A
Output voltage	3...30 V DC
[Uc] control circuit voltage	3...12 V DC
Capacitance unbalance	2.5 pF input/output
Minimum switching voltage	3 V DC turn-on
Maximum switching voltage	1 V DC turn-off

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Input current	10 mA
Input impedance	500 Ohm
Solid state output type	Mosfet output DC switching
Load current	0.001...3.5 A
Transient Overvoltage	35 V
Maximum operating frequency	500 Hz
Surge current	9 A 10 ms
Maximum voltage drop	<0.5 V on-state
Maximum leakage current	0.001 mA off-state
Response time	0.12 ms (turn-on) 0.1 ms (turn-off)
Overvoltage category	III
Width	0.2 in (5 mm)
Height	1.1 in (28 mm)
Depth	0.6 in (15 mm)
Product Weight	0.0090 lb(US) (0.0041 kg)
Device presentation	Complete product

Environment

Flame retardance	V0 conforming to UL 94
Dielectric strength	2500 V for input/output
Pollution degree	2
Standards	IEC/EN 60947-1 IEC/EN 62314 UL 508 C22.2 No. 14
Product Certifications	cURus CSA EAC CE UKCA
Marking	CE
IP degree of protection	IP00
Ambient air temperature for operation	-4...176 °F (-20...80 °C)
Ambient Air Temperature for Storage	-4...185 °F (-20...85 °C)

Ordering and shipping details

Category	US10CP222375
Discount Schedule	0CP2
GTIN	3606480579646
Returnability	Yes
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
------------------------	-----

Nbr. of units in pkg.	1
Package 1 Height	0.276 in (0.700 cm)
Package 1 Width	0.984 in (2.500 cm)
Package 1 Length	14.567 in (37.000 cm)
Package weight(Lbs)	0.141 oz (4.000 g)
Unit Type of Package 2	BB1
Number of Units in Package 2	12
Package 2 Height	0.276 in (0.700 cm)
Package 2 Width	0.984 in (2.500 cm)
Package 2 Length	14.567 in (37.000 cm)
Package 2 Weight	2.328 oz (66.000 g)
Unit Type of Package 3	S01
Number of Units in Package 3	1080
Package 3 Height	5.906 in (15.000 cm)
Package 3 Width	5.906 in (15.000 cm)
Package 3 Length	15.748 in (40.000 cm)
Package 3 Weight	13.726 lb(US) (6.226 kg)

Contractual warranty

Warranty (in months)	18
-----------------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	16 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	0.1 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	15 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better



Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Compliant By Exemption
REACH Regulation	Reference contains Substances of Very High Concern above the threshold
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture

Circularity Profile	No need of specific recycling operations
Take-back	No


Dimensions Drawings

Dimensions

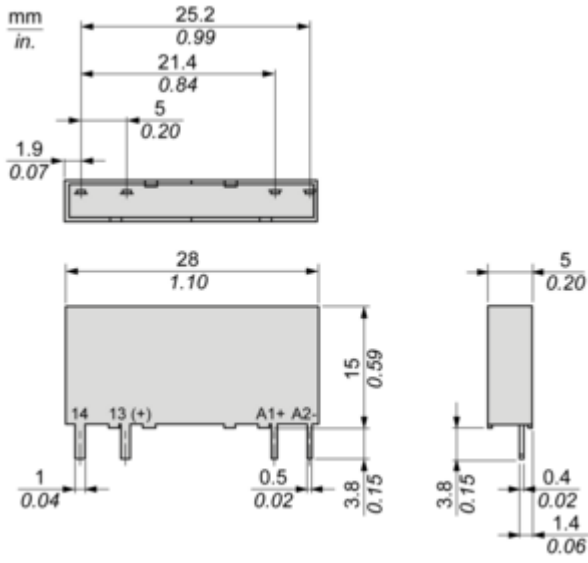

Mounting and Clearance


Mounting

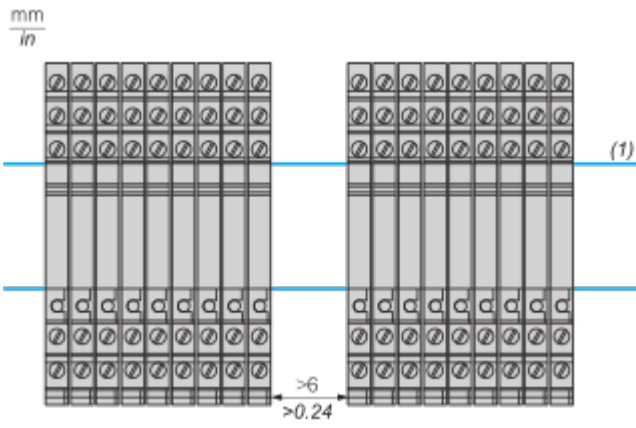

(1) : DIN Rail Mount

Performance Curves

Derating Curves

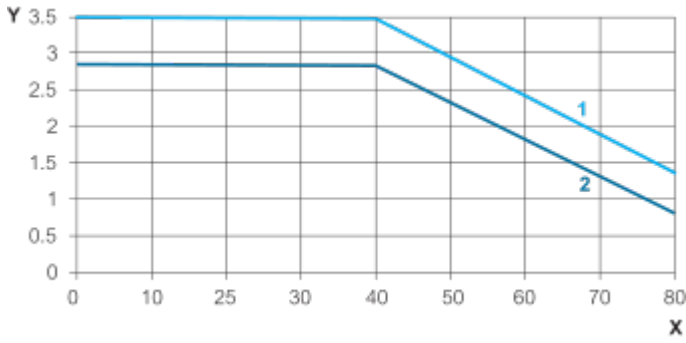

X : Ambient Temperature (°C)


Y : Load Current (Amperes)

1 : Installed single unit, distance to adjacent components more than 6.2 mm

2 : Multiple units, no minimum spacing between components

Connections and Schema

Wiring



- (1) Load
- (2) DC Source

Technical Illustration

Dimensions

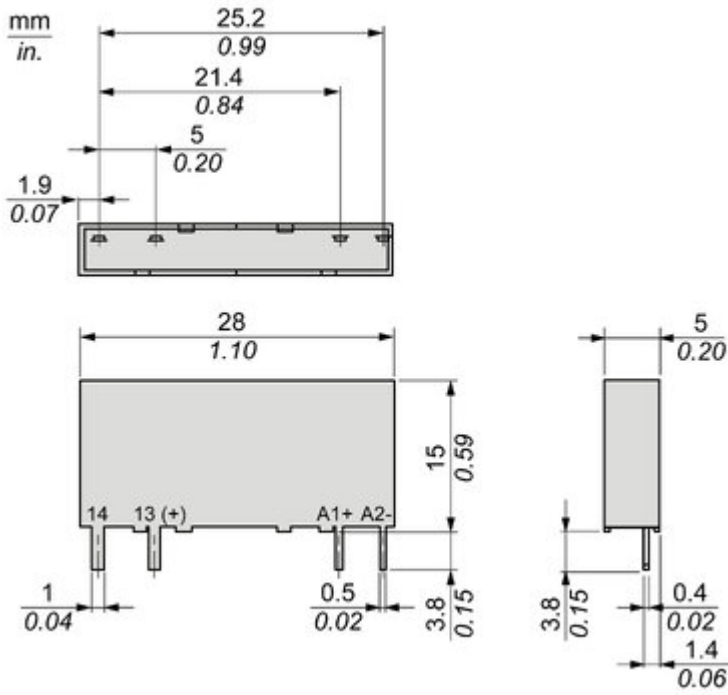


Image of product / Alternate images

Alternative





