

MASTERCcolour CDM-T

MASTERCcolour CDM-T 150W/942 G12 1CT

Range of single-ended, compact, high-efficiency, discharge lamps with a stable color over lifetime and a crisp, sparkling light



Product data

• General Characteristics

Cap-Base	G12
Bulb	T19 [T 19mm]
Bulb Finish	Clear
Operating Position	any [Any or Universal (U)]
Life to 5% failures EM	9000 hr
Life to 5% failures EL	9000 hr
Life to 10% failures EM	10000 hr
Life to 10% failures EL	10000 hr
Life to 20% failures EM	11000 hr
Life to 20% failures EL	11000 hr
Life to 50% failures EM	12000 hr
Life to 50% failures EL	12000 hr

• Light Technical Characteristics

Color Code	942 [CCT of 4200K]
Color Rendering Index	96 Ra8
Color Designation (text)	Cool White
Color Temperature	4200 K
Color Temperature Technical	4050 K
Luminous Flux Lamp EM	12700 Lm
Luminous Flux Lamp EL	12700 Lm
Luminous Efficacy Lamp EM	88 Lm/W

Luminous Efficacy Lamp EL	88 Lm/W
Lumen Maintenance EM 2000h	85 %
Lumen Maintenance EL 2000h	85 %
Lumen Maintenance EM 5000h	75 %
Lumen Maintenance EL 5000h	80 %
Lumen Maintenance EM 10000h	65 %
Lumen Maintenance EL 10000h	70 %
Design Mean Lumens EL	10800 Lm
Design Mean Lumens EM	9900 Lm
Chromaticity Coordinate X	0.375 -
Chromaticity Coordinate Y	0.363 -

• Electrical Characteristics

System Power EM	165 W
System Power EL	167 W
Lamp Wattage	150 W
Lamp Wattage EM 25°C, Nominal	150.0 W
Lamp Wattage EM 25°C, Rated	145.0 W
Lamp Wattage EL 25°C, Rated	150.0 W
Lamp Wattage EL 25°C, Nominal	150.0 W
Lamp Voltage	90 V

PHILIPS

MASTERColour CDM-T

Lamp Current EM	1.9 A
Lamp Current EL	1.7 A
Ignition Time	30 (max) s
Run-up time 90%	3 (max) min
Ignition Peak Voltage	3500 (min) V
Re-ignition Time [min]	15 (max) min
Dimmable	No

• Environmental Characteristics

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content	10.4 mg
Energy consumption kWh/1000h	165 kWh

• UV-related Characteristics

PET (NIOSH)	35 h.klx
Damage Factor D/fc	0.35 -

• Luminaire Design Requirements

Cap-Base Temperature	280 (max) C
Pinch Temperature	350 (max) C
Bulb Temperature	650 (max) C

• Product Dimensions

Reference Length A	96 (max) mm
--------------------	-------------

Overall Length C	110 (max) mm
Diameter D	20 (max) mm
Light Center Length L	55 (min), 56 (nom), 57 (max) mm
Arc Length O	8 mm
Light Center Length L [inch]	2.21875 in
Overall Length C [inch]	4.34375 (max) in
Diameter D [inch]	0.75 in

• Product Data


Order code	928084605131
Full product code	928084605131
Full product name	MASTERColour CDM-T 150W/942 G12 1CT
Order product name	MASTERC CDM-T 150W/942 G12 1CT
Pieces per pack	1
Packing configuration	12
Packs per outerbox	12
Bar code on pack - EAN1	8711500200051
Bar code on outerbox - EAN3	8711500200068
Logistic code(s) - 12NC	928084605131
ILCOS code	MT/UB-150/942-H-G12-21/100
Net weight per piece	0.033 kg

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures

- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- Lamps may use electronic or electromagnetic control gear, except 35W/942 and 20W lamps, which must use electronic control gear.


Dimensional drawing

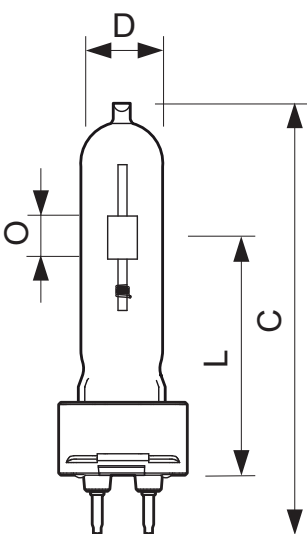

MASTERColour CDM-T 150W/942 G12 1CT


Product	C (Max)	D (Max)	L (Min)	L (Norm)	L (Max)	O (Norm)
CDM-T 150W/942 G12	110	20	55	56	57	8

Dimensional drawing



G12

Photometric data

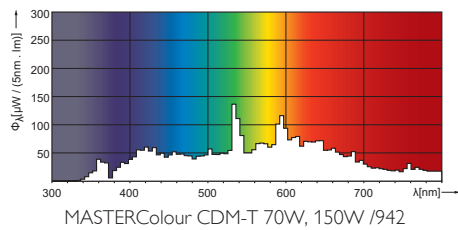

© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2013, October 31
data subject to change