



MASTERColour CDM-TC Elite

MASTERColour CDM-TC Elite 35W/930 G8.5 1CT

Compact, single-ended, very high-efficiency, long-life ceramic metal-halide discharge lamp producing crisp white sparkling light with high color rendering

Product data

• General Characteristics

Cap-Base	G8.5
Bulb	T14 [T 14 mm]
Bulb Finish	Clear
Operating Position	any [Any or Universal (U)]
Life to 5% failures EL	9000 hr
Life to 10% failures EL	10000 hr
Life to 20% failures EL	12000 hr
Life to 50% failures EL	15000 hr

• Light Technical Characteristics

Color Code	930 [CCT of 3000K]
Color Rendering Index	87 (min), 90 (nom) Ra8
Color Designation (text)	Warm White
Color Temperature	3000 K
Color Temperature Technical	2970 K
Luminous Flux Lamp EL	4000 Lm
Luminous Efficacy Lamp EL	102 Lm/W
Lumen Maintenance EL 2000h	93 %
Lumen Maintenance EL 5000h	88 %
Lumen Maintenance EL 10000h	80 %
Lumen Maintenance EL 12000h	78 %
Design Mean Lumens EL	3300 Lm

Chromaticity Coordinate X	0.435 -
Chromaticity Coordinate Y	0.396 -

• Electrical Characteristics

System Power EL	43 W
Lamp Wattage	35 W
Lamp Wattage EL 25°C, Rated	39.0 W
Lamp Wattage EL 25°C, Nominal	35.0 W
Lamp Voltage	85 V
Lamp Current EL	0.460 A
Ignition Time	30 (max) s
Run-up time 90%	3 (max) min
Re-ignition Time [min]	15 (max) min
Dimmable	No

• Environmental Characteristics

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content	4.7 mg
Energy consumption kWh/1000h	43 kWh

• UV-related Characteristics

Damage Factor D/fc PET (NIOSH)	0.3 (max) - 8 (min) h500lx
--------------------------------	----------------------------



MASTERColour CDM-TC Elite

• Luminaire Design Requirements

Pinch Temperature	300 (max) C
Bulb Temperature	500 (max) C

• Product Dimensions

Overall Length C	85 (max) mm
Diameter D	15 (max) mm
Light Center Length L	51 (min), 52 (nom), 53 (max) mm
Arc Length O	4.8 mm
Light Center Length L [inch]	2 (min), 2.45 (nom), 2.9 (max) in
Overall Length C [inch]	3.3 (max) in
Diameter D [inch]	0.6 (max) in

• Product Data

Order code	928189105131
------------	--------------


Full product code	928189105131
Full product name	MASTERColour CDM-TC Elite 35W/930 G8.5 1CT
Order product name	MASTERC CDM-TC Elite 35W/930 G8.5 1CT/12
Pieces per pack	1
Packing configuration	12
Packs per outerbox	12
Bar code on pack - EAN1	8727900911497
Bar code on outerbox - EAN3	8727900911503
Logistic code(s) - 12NC	928189105131
ILCOS code	MT/UB-35/930-H-G8.5-17/85
Net weight per piece	0.009 kg

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Use only with electronic control gear

- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing

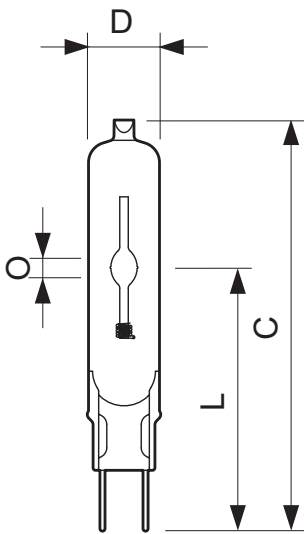

MASTERColour CDM-TC Elite 35W/930 G8.5 1CT


Product	C (Max)	D (Max)	L (Min)	L (Norm)	L (Max)	O (Norm)
CDM-TC Elite 35W/930 G8.5	85	15	51	52	53	4.8

Dimensional drawing



G8.5

Photometric data

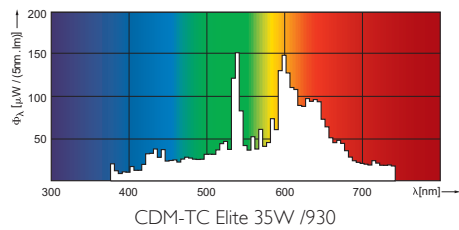

© 2015 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, July 6
data subject to change