



MASTER PL-T Xtra 4 Pin

MASTER PL-T Xtra 32W/840/4P 1CT

MASTER PL-T Xtra is an efficient compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications demanding higher lighting levels. MASTER PL-T Xtra lamps furthermore provide significantly lower operating costs thanks to their lifetime, which is more than double that of a standard MASTER PL-T lamp, and their very low early failure rate. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 4-pin version is designed for operation on electronic gear and is provided with a plug-in/pull-out lamp base.

Product data

• General Characteristics

Cap-Base	GX24q-3
Cap-Base Information	4P
Life to 10% fail	20000 hr
Preheat EL,3h	
Life to 10% fail	6000 hr
Nonpreh EL,3h	
Life to 50% fail	33000 hr
Preheat EL,3h	
Life to 50% fail	9000 hr
Nonpreh EL,3h	
LSF HF Preheat	99 %
2000h Rated,3h	
LSF HF Preheat	98 %
4000h Rated,3h	
LSF HF Preheat	97 %
6000h Rated,3h	
LSF HF Preheat	96 %
8000h Rated,3h	
LSF HF Preheat	95 %
12000h Rated,3h	
LSF HF Preheat	94 %
16000h Rated,3h	
LSF HF Preheat	90 %
20000h Rated,3h	

• Light Technical Characteristics

Color Code	840 [CCT of 4000K]
Color Rendering Index	82 Ra8
Color Designation (text)	Cool White
Color Temperature	4000 K
Luminous Flux EL	2400 Lm
25°C, Rated	

Luminous Flux EL	2300 Lm
25°C, Nominal	
Lum Efficacy Rated	75 Lm/W
HF 25°C	
LLMF HF 2000h	92 %
Rated	
LLMF HF 4000h	88 %
Rated	
LLMF HF 6000h	86 %
Rated	
LLMF HF 8000h	84 %
Rated	
LLMF HF 12000h	81 %
Rated	
LLMF HF 16000h	79 %
Rated	
LLMF HF 20000h	78 %
Rated	
Design Temperature	28 C
Chromaticity Coordinate X	380 -
Chromaticity Coordinate Y	379 -

• Electrical Characteristics

Lamp Wattage	32 W
Lamp Wattage EL	32.0 W
25°C, Rated	
Lamp Wattage EL	32 W
25°C, Nominal	
Lamp Voltage EL	101 V
25°C	
Lamp Current EL	0.320 A
25°C	
Dimmable	Yes



asimpleswitch.com

PHILIPS

MASTER PL-T Xtra 4 Pin

• Environmental Characteristics

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content	3.0 mg
Energy consumption kWh/1000h	35 kWh

• Measuring Conditions

Calibration Current	0.320 A
HF Generator Rated Voltage	200 V
Resistor	315 ohm

• Product Dimensions

Base Face to Base Face A	98.7 (max) mm
Insertion Length B	123.0 (max) mm
Overall Length C	138.7 (max) mm
Diameter D	41.0 (max) mm

• Product Data



Order code	927912584014
Full product code	927912584014
Full product name	MASTER PL-T Xtra 32W/840/4P 1CT
Order product name	MASTER PL-T Xtra 32W/840/4P 1CT/5X10BOX
Pieces per pack	1
Packing configuration	5X10CC
Packs per outerbox	50
Bar code on pack - EAN1	8711500897435
Bar code on intermediate packing - EAN2	8711500897442
Bar code on outerbox - EAN3	8711500897459
Logistic code(s) - 12NC	927912584014
ILCOS code	FSMH-32/40/1B-L/P-GX24q=3
Net weight per piece	70.000 gr

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear

- Shorter lamp life when often switching and not well pre-heated electrodes


Dimensional drawing

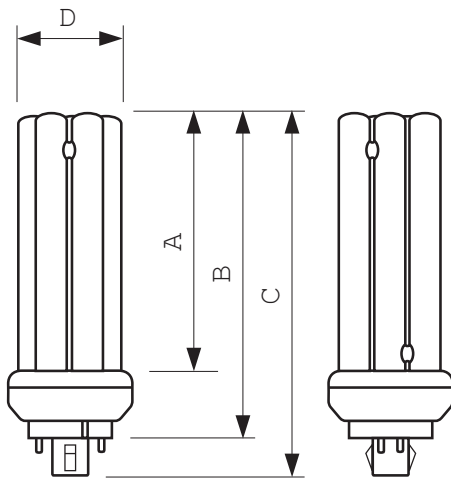

MASTER PL-T Xtra 32W/840/4P 1CT

Product	A (Max)	B (Max)	C (Max)	D (Max)
PL-T Xtra 32W/840/4P M	98.7	123.0	138.7	41.0

Photometric data

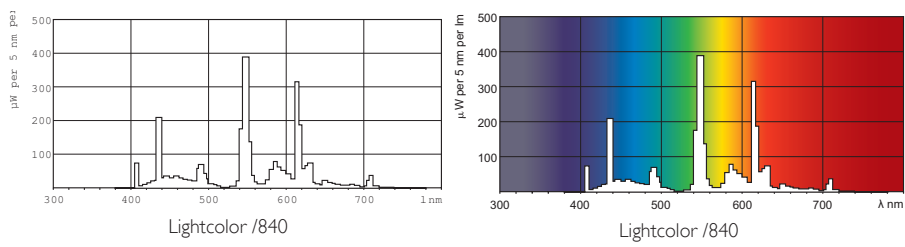

© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2013, October 9
data subject to change