



MASTERCcolour CDM-TC Elite

MASTERCcolour CDM-TC Elite 50W/930 G8.5 1CT/12

Compact, single-ended, very high-efficiency, long-life ceramic metal-halide discharge lamp producing crisp white sparkling light with high color rendering

Product data

• General Information

Cap-Base	G8.5 [G8.5]
Operating Position	UNIVERSAL [Any or Universal (U)]
Life To 5% Failures (Nom)	12000 h
Life To 10% Failures (Nom)	14000 h
Life To 20% Failures (Nom)	16000 h
Life To 50% Failures (Nom)	20000 h
ANSI Code HID	-

• Light Technical

Color Code	930 [CCT of 3000K]
Luminous Flux (Rated) (Min)	4900 lm
Luminous Flux (Rated) (Nom)	5400 lm
Color Designation	Warm White (WW)
Lumen Maintenance 12000 h (Nom)	82 %
Lumen Maintenance 10000 h (Nom)	83 %
Lumen Maintenance 2000 h (Nom)	95 %
Lumen Maintenance 5000 h (Nom)	88 %
Chromaticity Coordinate X (Nom)	0.435
Chromaticity Coordinate Y (Nom)	0.396
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	108 lm/W

Color Rendering Index (Min)	88
Color Rendering Index (Nom)	91

• Operating and Electrical

Power (Rated) (Min)	50.0 W
Power (Rated) (Nom)	50.0 W
Lamp Current Run-Up (Max)	2 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	5000 V
Ignition Supply Voltage (Min)	198 V
Re-Ignition Time (Min) (Max)	15 min
Ignition Time (Max) Voltage (Max)	30 s
Voltage (Min)	96 V
Voltage (Nom)	84 V
	90 V

• Controls and Dimming

Dimmable	No
Run-Up Time 90% (Max)	3 min

• Mechanical and Housing

Bulb Finish	Clear
-------------	-------

PHILIPS

• Approval and Application

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content (Nom)	6.4 mg
Energy Consumption kWh/1000 h	55 kWh

• UV

Pet (Niosh) (Min)	8 h/500lx
Damage Factor D/fc (Max)	0.3

• Luminaire Design Requirements

Bulb Temperature (Max)	550 °C
------------------------	--------

Pinch Temperature (Max) 350 °C

• Product Data


Full product code	872790093062700
Order product name	MASTERColour CDM-TC Elite 50W/930 G8.5 1CT/12
EAN/UPC - Product	8727900930627
Order code	928191805131
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928191805131
Net Weight (Piece)	0.010 kg
ILCOS Code	MT/UB-50/930-H-G8.5-17/85

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Use only with electronic control gear

- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing

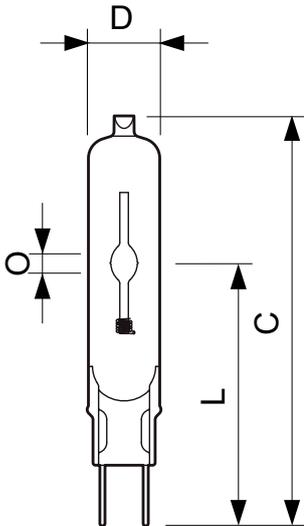


CDM-TC Elite


CDM-TC Elite 50W/930 G8.5

Product	D	O	L	L	L	C
MASTERColour CDM-TC Elite 50W/930 G8.5 1CT/12	15 mm	6 mm	51 mm	53 mm	52 mm	85 mm

Dimensional drawing



Photometric data

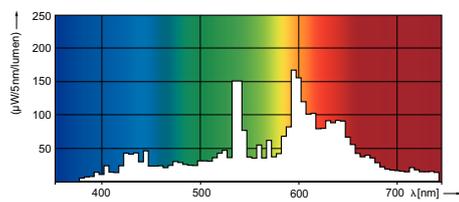

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 28
data subject to change