

HID ignitors for series systems

SI 54 380-415V 50/60Hz

HID ignitors for series systems

Product data

• General Information

Application Code	54
Lamp Type	HPI
Number Of Lamps	1 piece/unit

• Operating and Electrical

Input Voltage	380 to 415 V
Input Frequency	50-60_1 Hz
Igniton Type	Parallel
Number Of Ignition Pulses	1
Ignition Voltage (Max)	1.5 kV
Response Voltage	330 V
Mains Voltage	-8%+6%
Performance (AC)	
Mains Voltage Safety (AC)	-10%+10%
Power Losses (Nom)	1.0 W

• Wiring

Cable Capacity	120 nF
Wires Device To Lamp (Nom)	
Wire Striplength	6.0 mm
Ballast Contact Wire Cross Section	0.70-2.50 mm ²
Connector Type	Screw

• System characteristics

Rated Ballast-Lamp Power	2000 W
--------------------------	--------

• Temperature

T-Ambient (Max)	75 °C
T-Ambient (Min)	-20 °C
T-Storage (Max)	80 °C
T-Storage (Min)	-25 °C
T-Case Maximum (Max)	80 °C

• Mechanical and Housing


Housing	SNI-115
---------	---------

• Product Data

Full product code	871150091548130
Order product name	SI 54 380-415V 50/60Hz
EAN/UPC - Product	8711500915481
Order code	913619149966
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	20
Material Nr. (12NC)	913619149966
Net Weight (Piece)	0.083 kg


PHILIPS

Dimensional drawing

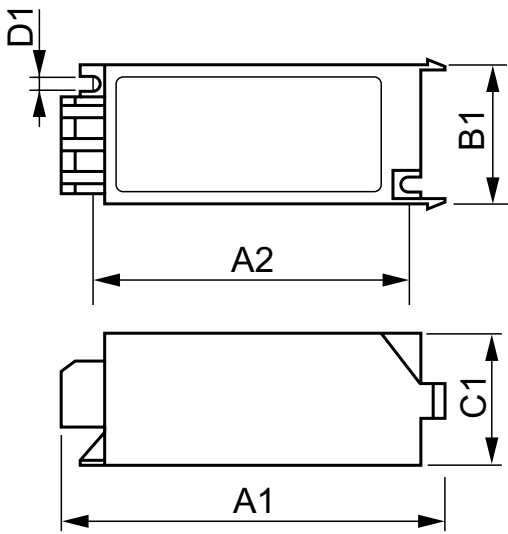

SI 54 380-415V 50/60Hz

Product	D1	C1	A1	A2	B1
SI 54 380-415V 50/60Hz	4.3 mm	38.0 mm	114.5 mm	95.0 mm	41.0 mm

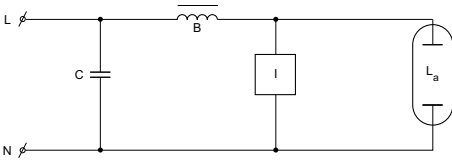

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 22
data subject to change