

D-CO Bollard

THORN

96262145 D-CO LED BOLLARD 1000 30L50 840 CL1

| | | | | | | | | | | | |
|-----------------|----------------|------|------|---|----|------|-----|----|-----|------|--|
| LED 14W LED_583 | ISO 9223 C3 | IP65 | IK10 | ⊕ | CE | RoHS | EAC | UL | CCC | Ta50 | |
|-----------------|----------------|------|------|---|----|------|-----|----|-----|------|--|

D-CO Bollard

A timeless LED bollard. Electronic, fixed output control gear. Class I electrical, IP65. Top and body: aluminium powder coated grey 900. Diffuser: semi-opal anti-UV polycarbonate. Suitable for flange mounting or with root spike (available separately). Complete with 4000K LED


Dimensions: Ø150 x 1000 mm

Luminaire input power: 14 W


Weight: 5.45 kg



TLG_DCOL_F_LEDBOLLARDLIT.jpg

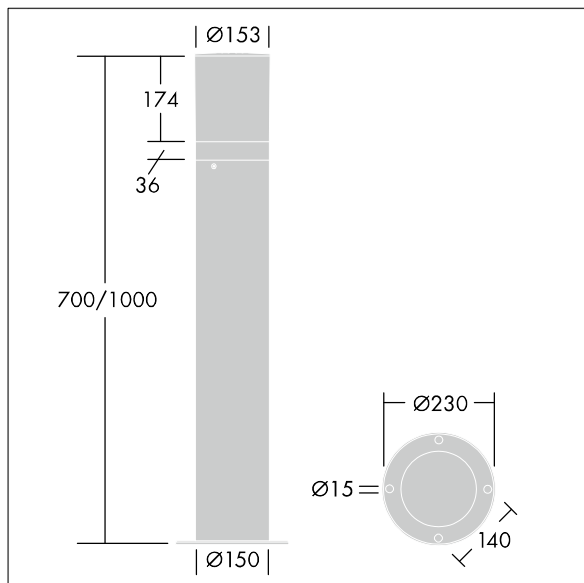

TLG_DCOB_M_BOL.wmf

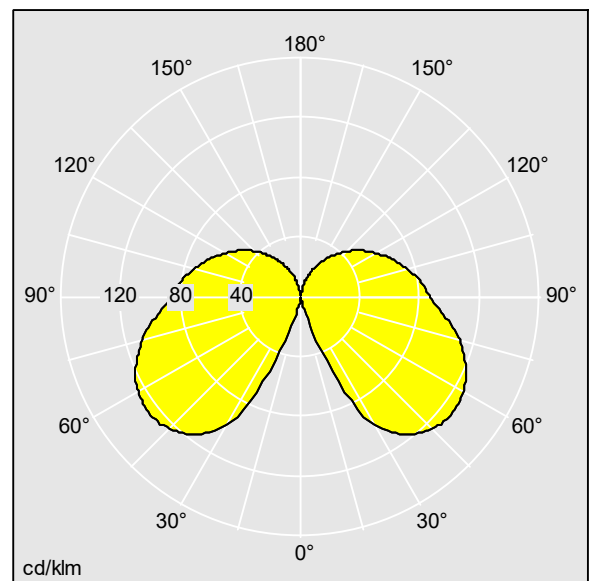

TLLA_DCOBOA_DC.ltd

Lamp position: STD - standard

Light Source: LED

Luminaire luminous flux*: 583 lm

Luminaire efficacy*: 42 lm/W

Correlated colour temperature*: 4000 Kelvin

Rated useful life (B10)*:

L80 50000 h at 25 °C

Ballast: 1x EL2

Luminaire input power*: 14 W Power factor = 0.97

Dimming: FO

LOR: 1,00 ULOR: 0,35 DLOR: 0,65

This product contains a light source of energy efficiency class F.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting